



NOTE:

1. MATERIAL:
 - HOUSING: THERMOPLASTIC(LCP), UL 94V-0, COLOR: NATURE.
 - ACTUATOR: THERMOPLASTIC, UL 94 V-0, COLOR: IVORY.
 - HOLD DOWN: PHOSPHOR BRONZE.
 - CONTACT: PHOSPHOR BRONZE.
2. FINISH:
 - CONTACT: GOLD FLASH OVER ALL, 50u" MIN. NICKEL UNDERPLATED ALL OVER.
 - HOLD DOWN: 100u" MIN. BRIGHT TIN PLATING OVER, 50u" MIN. NICKEL UNDERPLATED ALL OVER.

LOC DW	DIST	P	LTR	DESCR.	DATE	DWN	APVD
				SEE SHEET 1.			

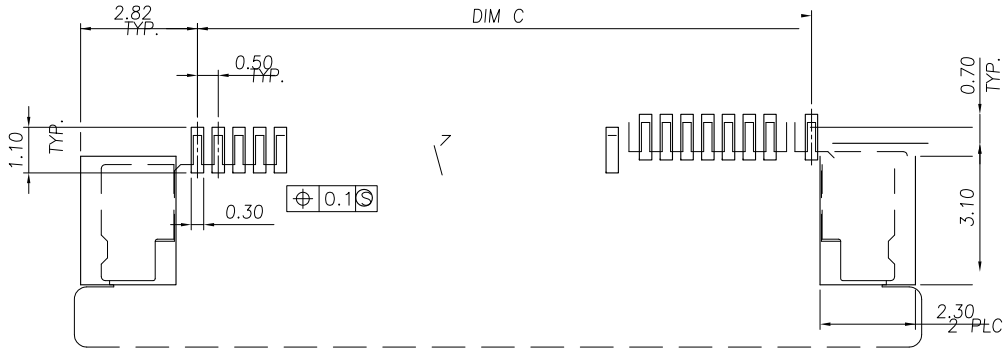

RECOMMENDED PCB DIMENSIONS DIAGRAM
TOLERANCE ± 0.05

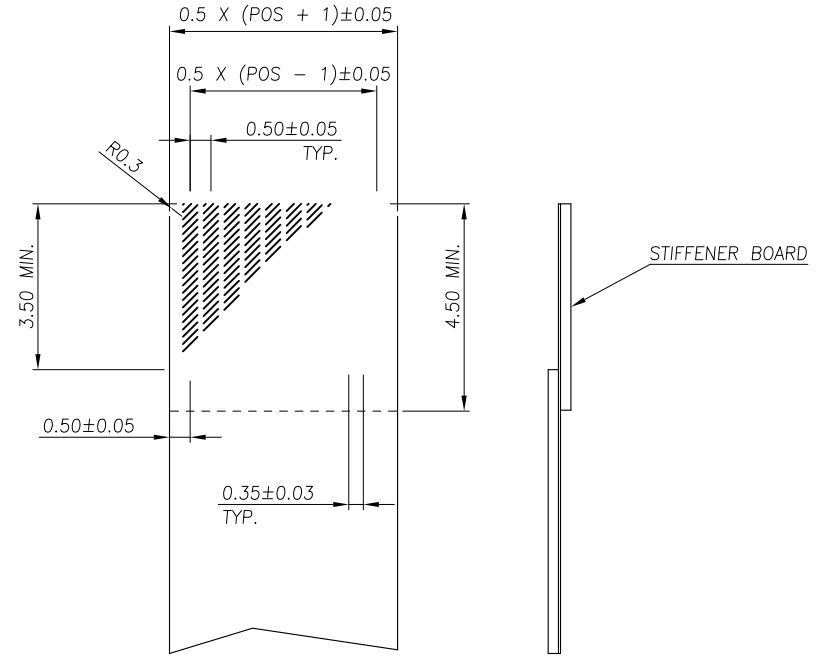

RECOMMENDED FPC DIMENSIONS DIAGRAM
TOLERANCE ± 0.05

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN		TE Connectivity	
DIMENSIONS:		CHK			
MM	0 PLC -	TOLERANCES UNLESS OTHERWISE SPECIFIED: APVD		FPC CONNECTOR, 0.5mm PITCH, BOTTOM CONTACT, SMT TYPE.	
	1 PLC ± 0.35	APPLICATION SPEC		SIZE	CAGE CODE
	2 PLC ± 0.25	WEIGHT		A3	00779
	3 PLC ± -	CUSTOMER DRAWING		DRAWING NO	
	4 PLC ± -			C=1734592	
	ANGLES ± 3°			SHEET 2 OF 3	
MATERIAL	FINISH			REV C	

