

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

, 19

© COPYRIGHT 19

BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

G

14

P

LTR

DESCRIPTION

DATE

DWN

APVD


J

REV / 0L20-0040-96

06JAN97

ME

TM

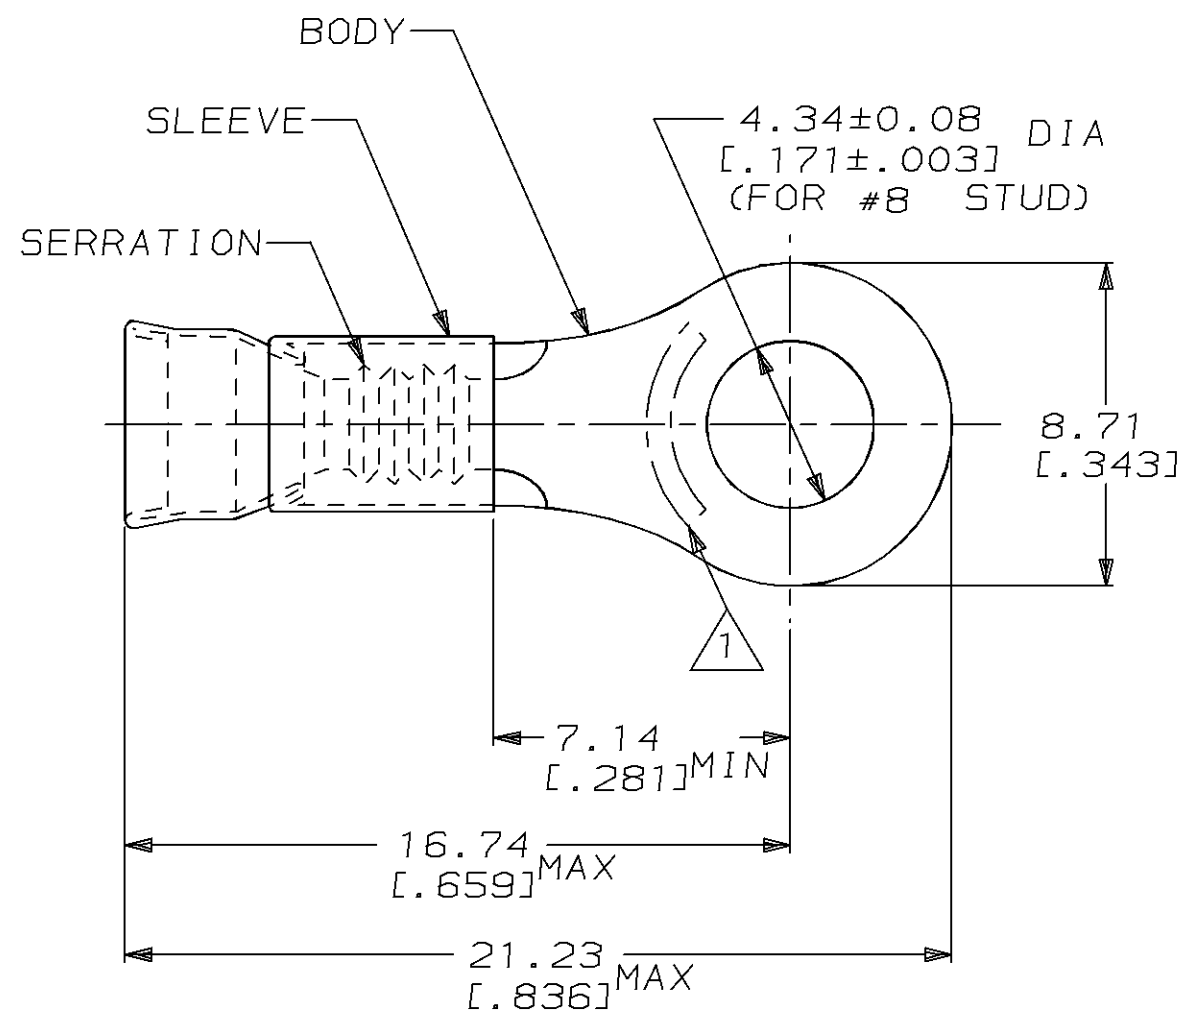

1 STAMP AMP 16-14*APPROX AS SHOWN

2. WIRE INSUL DIA, 2.03-3.30 [.080-.130]

3. TONGUE MATL THK, 0.79±0.05 [.031±.002]

1000

LOOSE PIECE

323160

QTY

PACKAGE TYPE

PART NO

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMMAX RECOMMENDED OPERATING
TEMPERATURE:
343°C [650°F]THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED.
IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING
ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.DWN
L OLMEDA

100CT94

CHK
M ELLIS

100CT94

APVD
S BORTNER

100CT94

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

AMP Incorporated
Harrisburg, PA 17105-3608NAME
TERMINAL, RING TONGUE,
STRATO-THERM™, DIAMOND GRIP™,
WIRE SIZE, 16-14 AWG

SIZE

CAGE CODE

DRAWING NO

A3

00779

C-323160

SCALE
6:1SHEET
1 OF 1REV
JFOR ADDITIONAL
PRODUCT INFORMATION OR
COPIES OF DRAWINGS
AND TECHNICAL DOCUMENTSPRODUCT INFORMATION CENTER
1-800-522-6752FOR APPLICATION
TOOLING INFORMATIONTOOLING ASSISTANCE CENTER
1-800-722-1111

FOR ORDER ENTRY


1-800-526-5142

VOLTAGE RATING:

-

CIRCULAR MIL AREA:
1.04mm²-2.62mm² [2050-5180]

STRANDED WIRE

DIMENSIONS:
mm [in]TOLERANCES UNLESS
OTHERWISE SPECIFIED:0 PLC ±-
1 PLC ±-
2 PLC ±0.20 [.008]
3 PLC ±-
4 PLC ±-
ANGLES ±-FINISH
BODY, NP, QQ-N-290MATERIAL
BODY, CU PER ASTM B152
SLEEVE, NI SIL PER
ASTM B122

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[323160](#)