


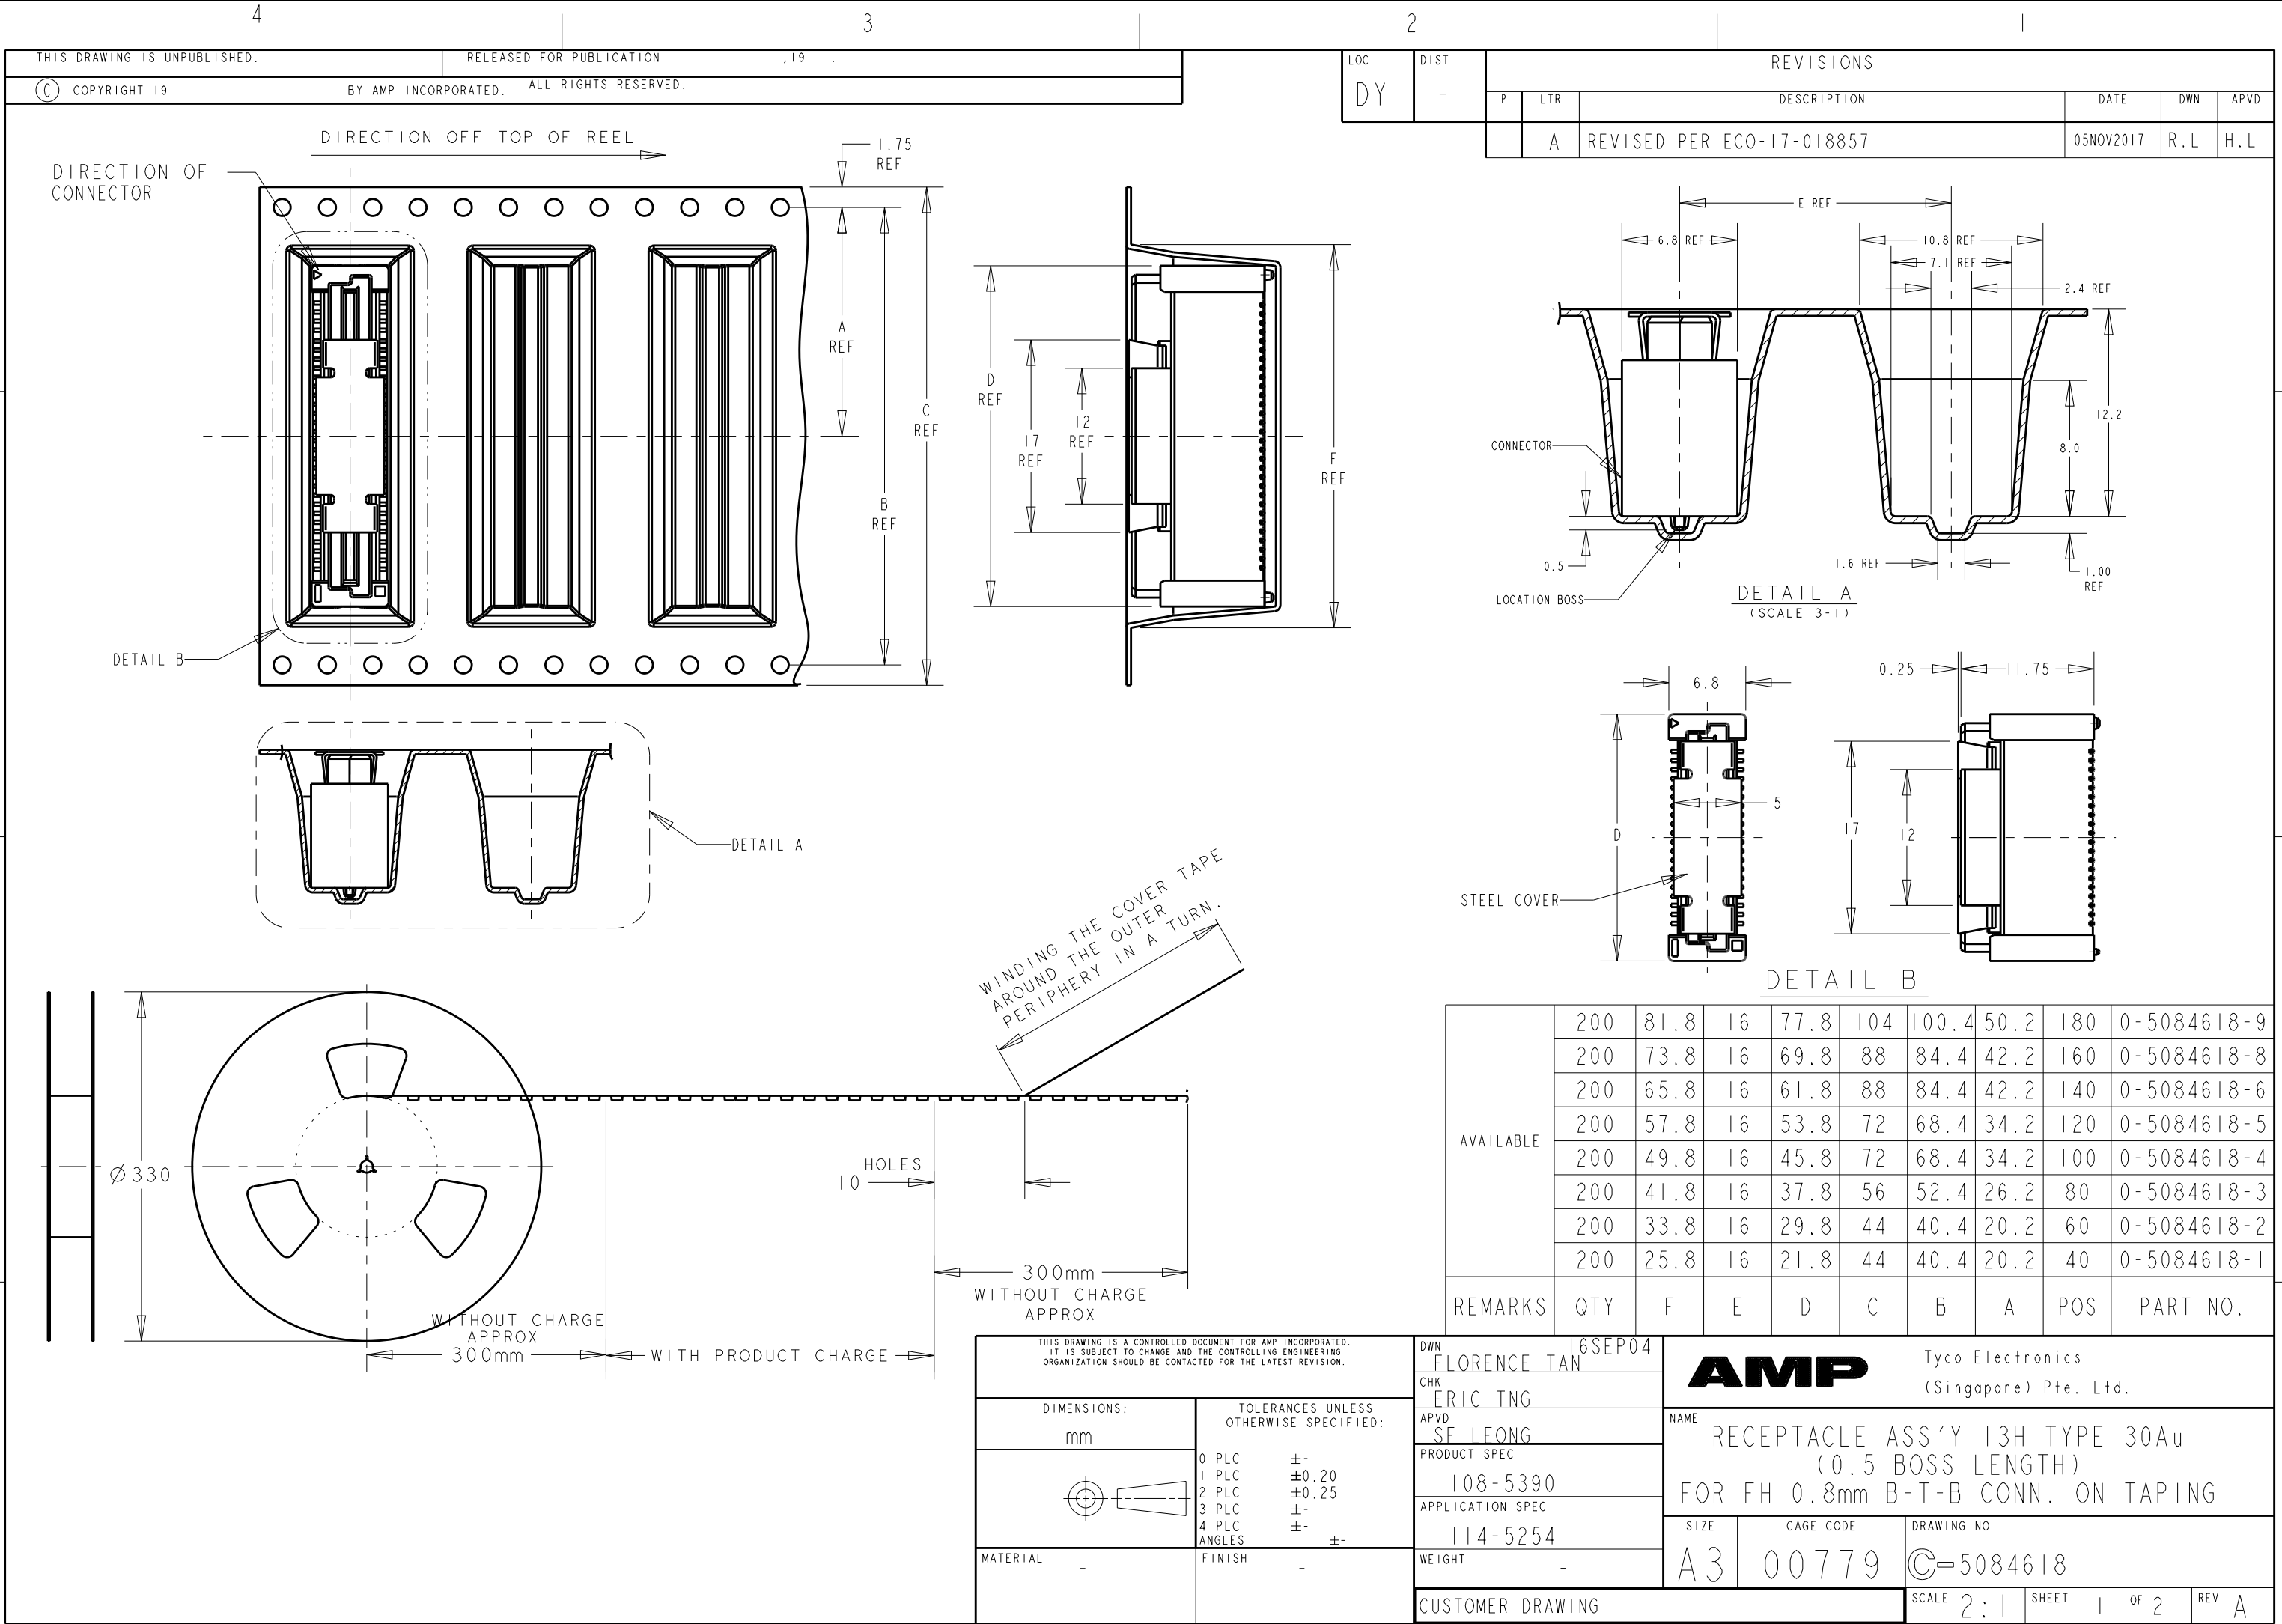

see sheet 1

NOTES;

- 1 MATERIAL:HOUSING:L.C.P. (HIGH TEMP. THERMOPLASTIC)
UL 94V-0,NATURAL.
CONTACT:BERYLIUM COPPER.
- 2 FINISH: CONTACT AREA:0.00076 MIN GOLD ON
0.0013 MIN ALL OVER NICKEL.
SOLDERING AREA:0.002 MIN MATTE-TIN
3. POSITION SERIES: SEE TABLE. (SHEET 2)
4. CONN STACK HEIGHT COMBINE OF PLUG "Y"H VS REC "X"H.
STACK HEIGHT = Y + X - 5
5. FOR STEEL COVER PICK AND PLACE VERSION,
DESCRIPTION PRINTING ON TUBE IS:
"REC ASS'Y (H=13mm), W/ STEEL COVER,
0.8mm BTB STACKING CONN"

76.20	77.80	71.20	180	0 -	- 9
68.20	69.80	63.20	160	0 -	- 8
60.20	61.80	55.20	140	0 -	- 6
52.20	53.80	47.20	120	0 -	- 5
44.20	45.80	39.20	100	0 -	- 4
36.20	37.80	31.20	80	0 -	- 3
28.20	29.80	23.20	60	0 -	- 2
20.20	21.80	15.20	40	0-5084618-1	
C	B	A	POS.	PART N ^o .	

RECOMMENDED P.C. BOARD LAYOUT

Ⓐ ADD CONNECTOR INFORMATION SHEET

CUSTOMER DRAWING

NAME	RECEPTACLE ASS'Y 13H TYPE 30Au (0.5 BOSS LENGTH) FOR FH 0.8mm B-T-B CONN. ON TAPING
------	---

SIZE	CAGE CODE	DRAWING NO
------	-----------	------------

[illegible]

A 3 00 7 79 (C-50846 8

SCALE	2 : 1	SHEET	2	OF	2	REV
-------	-------	-------	---	----	---	-----

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5084618-8](#)