

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

, 19

© COPYRIGHT 19

BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

MOD
23LOC
BDSTEP
39

P

F

ZONE

LTR

REVISIONS

DESCRIPTION


DATE

APPO

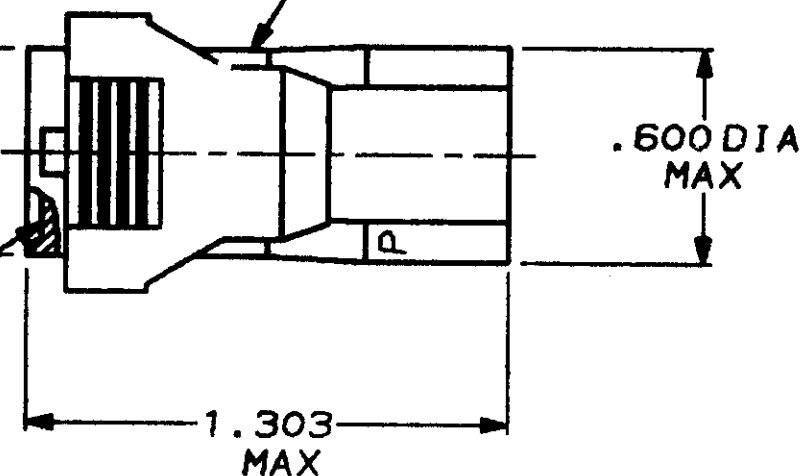
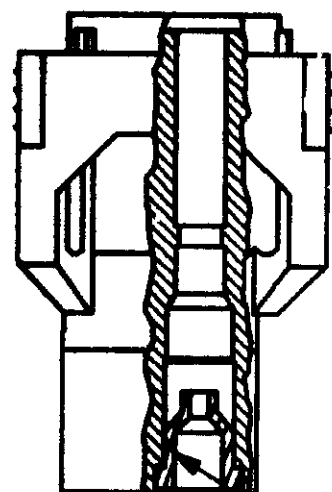

E REDRAWN AND REV PER ECN BD4183

8-17-80

KA

.564
MAX

MATING FACE

HOUSING
MATERIAL: THERMOPLASTIC
BLACK.536
MAXDISCRETE WIRE SEALS
MATERIAL: ELASTOMER
BLACK

1. WIRE INSULATION SEALING
RANGE .070-.130 DIA.
2. THIN MEMBRANE PERMISSIBLE ON SMALL
DIAMETER OF WIRE SEALS.
3. ROTATION OF CAVITY CIRCUIT KEY FROM
PART TO PART IS PERMISSIBLE.

207845-1

PART
NUMBERDO NOT SCALE PRINT.
UNLESS SPECIFIED
DIMENSIONS IN INCHES
TOLERANCES ON:
2 PLC DEC * -
3 PLC DEC * -
ANGLES * -

MATERIAL

SEE CALLOUT

FINISH

DR 8-17-80
J. GALLUCCI BD

CHK

APPD

APPD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

AMP

AMP INCORPORATED
Harrisburg, Pa. 17105

NAME

PLUG, 2 POSITION,
STANDARD ECONOSEAL
CONNECTOR

SIZE

B

FSCH NO

00779

DRAWING NO

207845

SCALE

2:1

SHEET

1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[207845-1](#)