

THIS DRAWING IS UNPUBLISHED

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED

© COPYRIGHT

 $\Theta_Y =$

LOC

CM

DIST

00

REVISIONS

P

LIR

DESCRIPTION

D&T

DARIN

APVD

F

REVISÉD PER ECQ-12-016926

040C

KH

SM





F1

FCR-12-016748

30411

MT

07

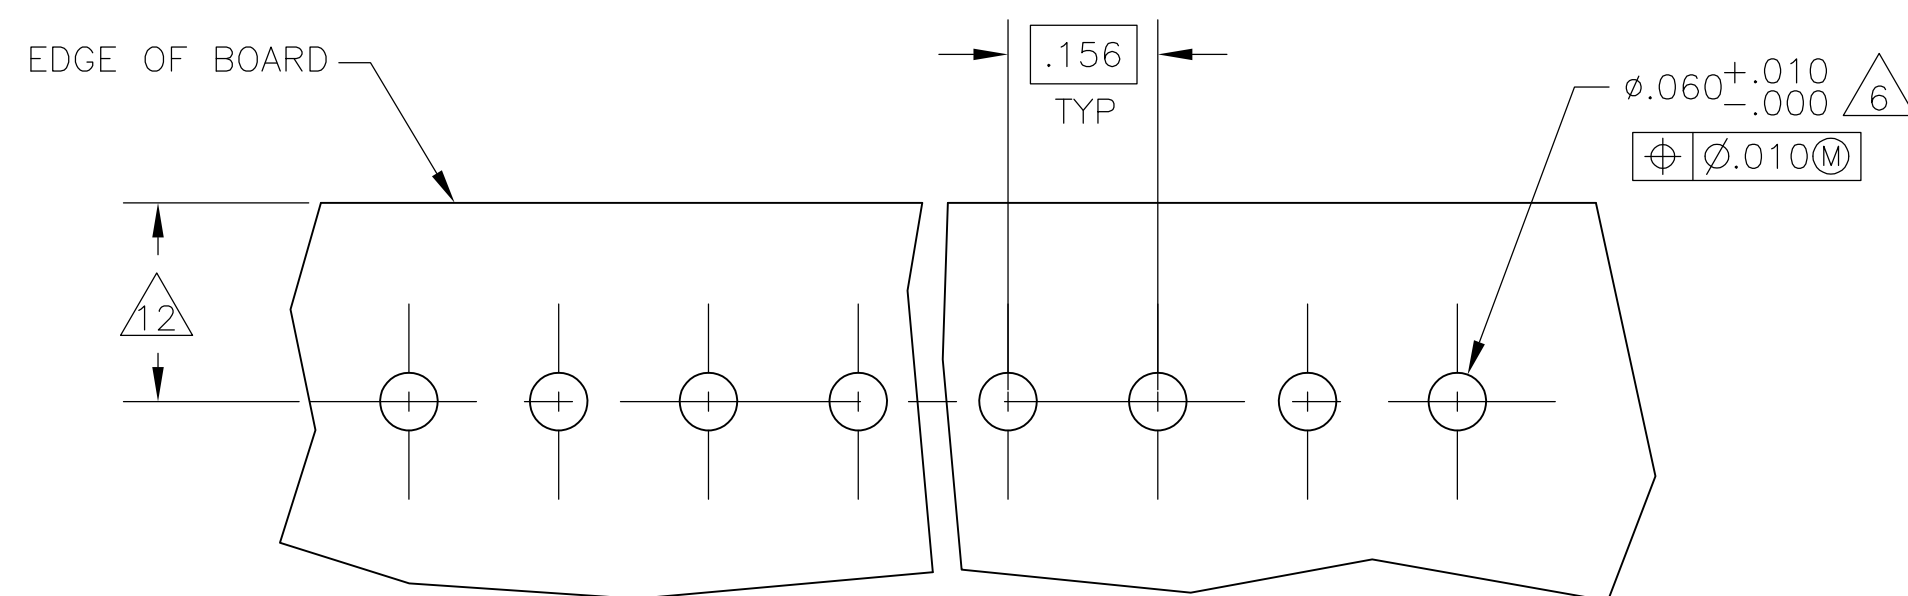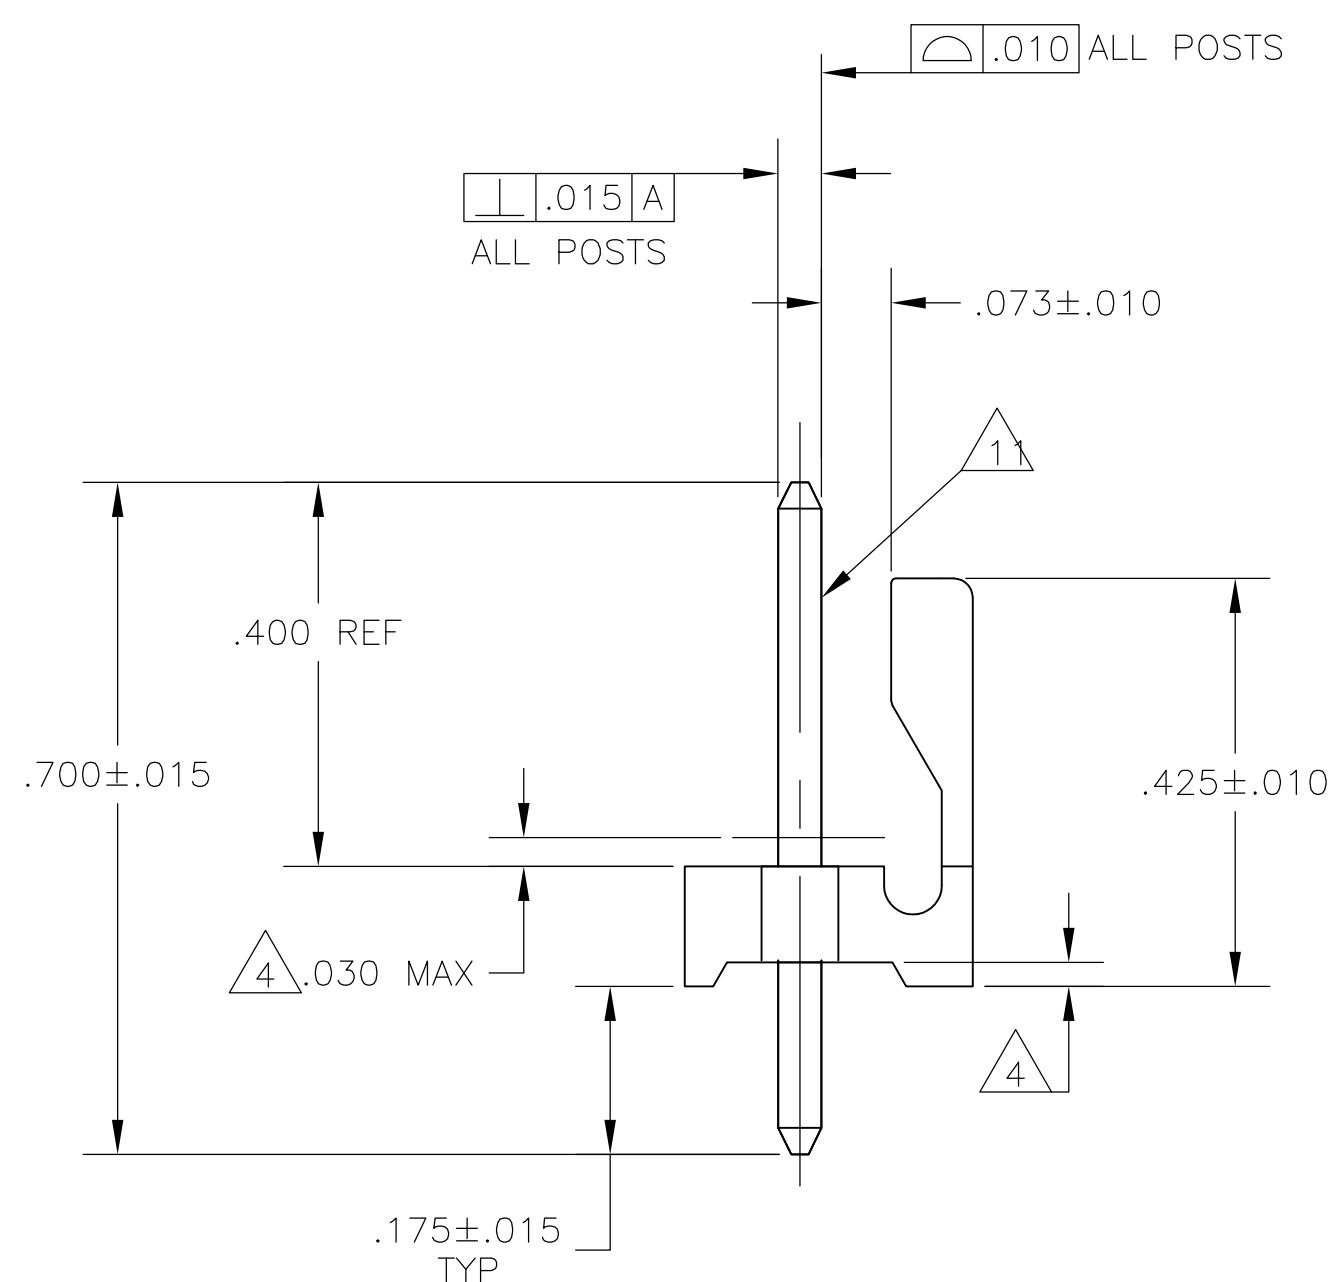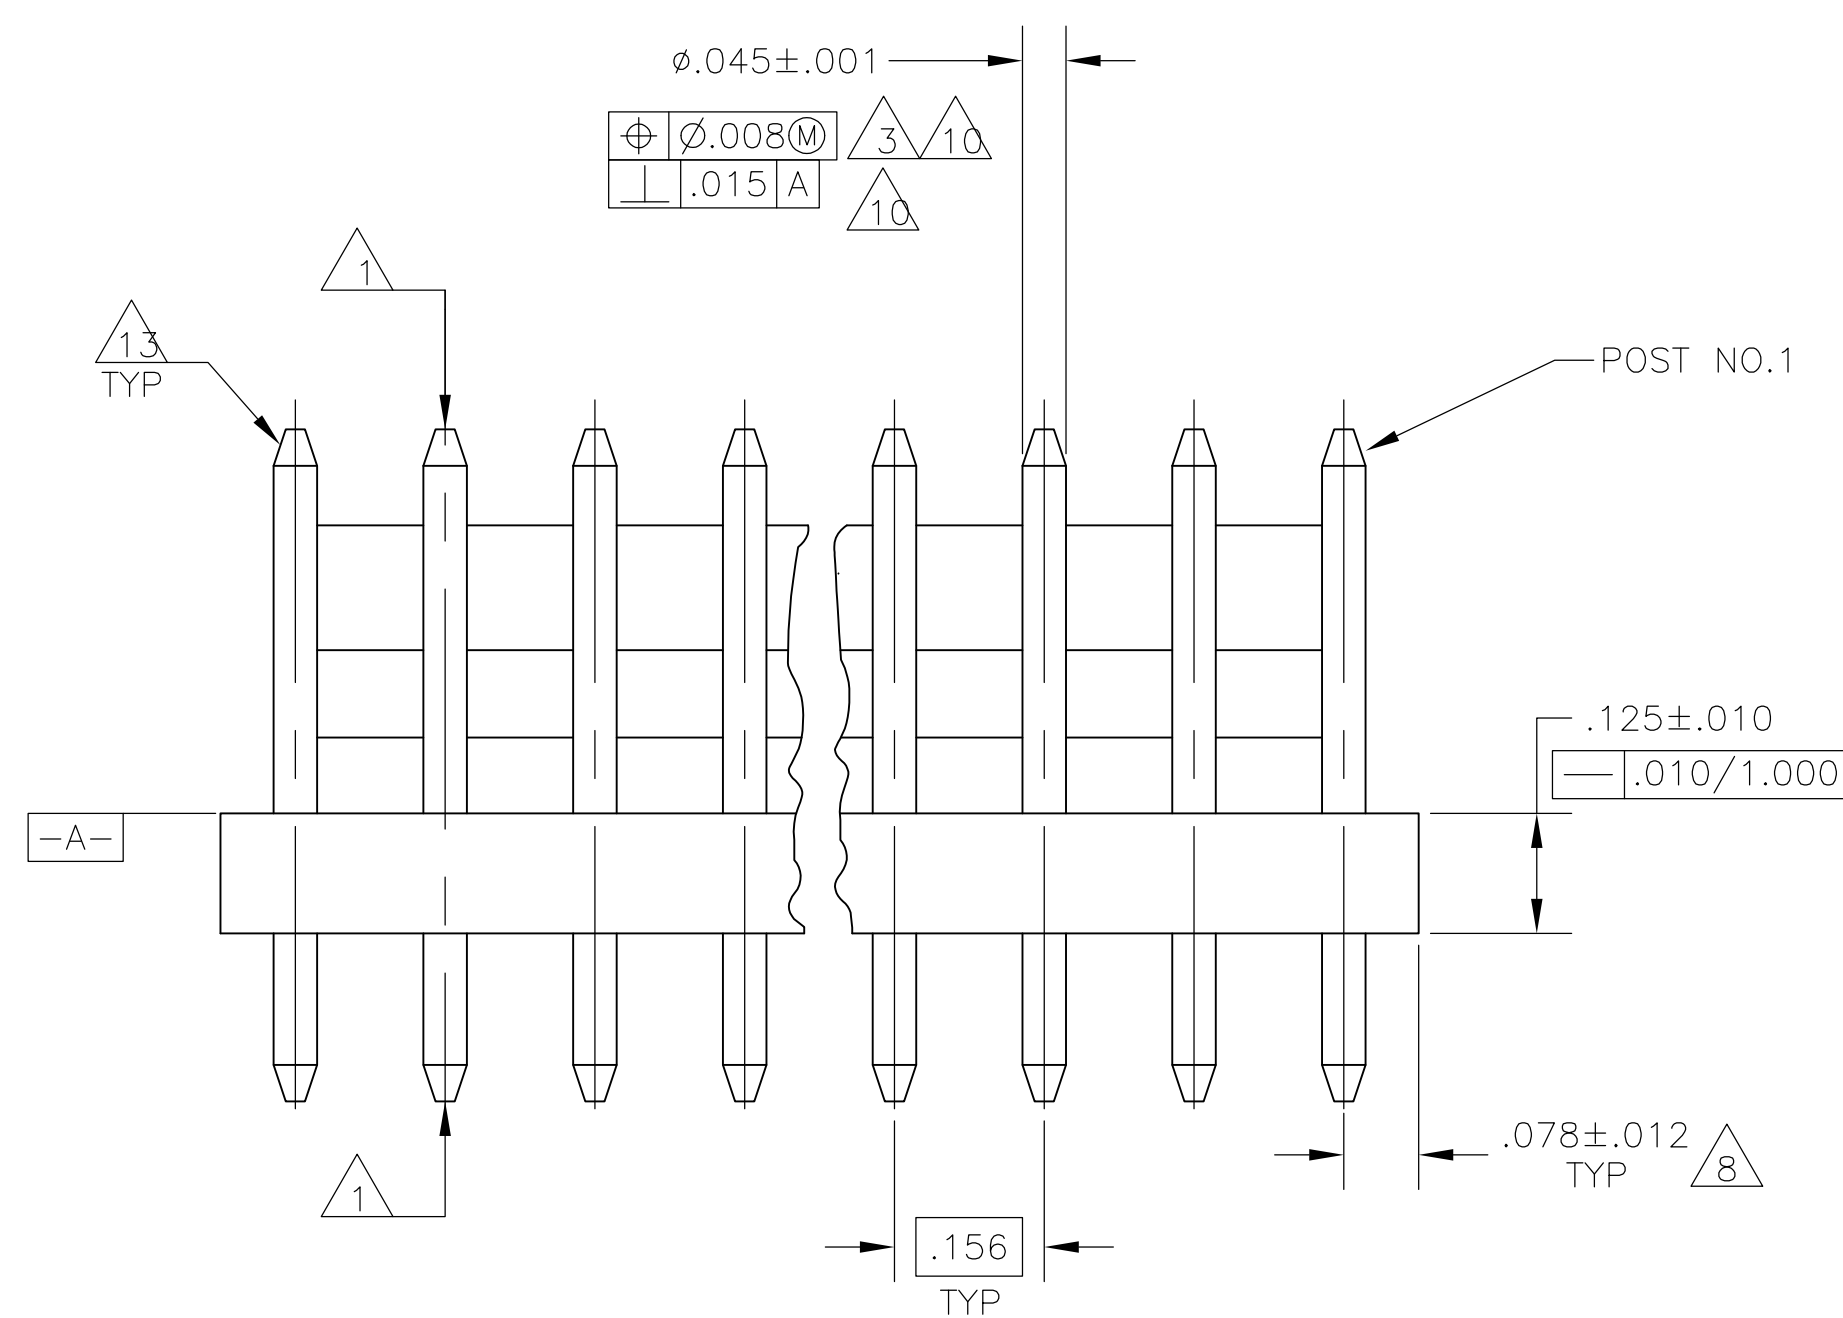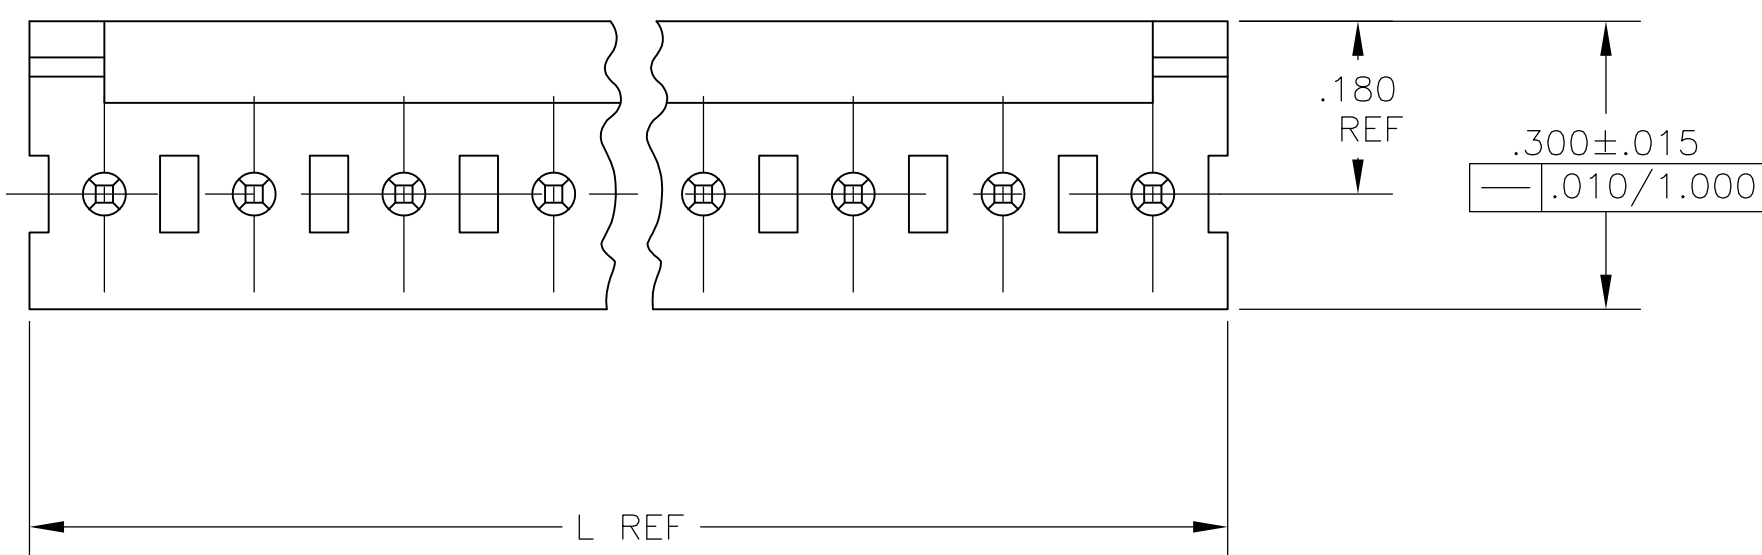

.060	1.52	1.000	25.40
.051	1.30	.750	19.05
.046	1.17	.450	11.43
.045	1.14	.425	10.80
.030	0.76	.300	7.62
.015	0.38	.180	4.57
.012	0.30	.175	4.45
.010	0.25	.156	3.96
.008	0.20	.125	3.18
.005	0.13	.078	1.98
.003	0.08	.073	1.85
.001	0.03	.068	1.73
.000	0.00	.063	1.60
[IN]	MM	[IN]	MM

CONVERSION TABLE

(F1) RECOMMENDED MOUNTING HOLE PATTERN
FOR .109±0.016 THICK P.C.BOARD (2)

95.10	3.744	24	2-644753-4
91.14	3.588	23	2-644753-3
87.17	3.432	22	2-644753-2
83.21	3.276	21	2-644753-1
79.25	3.120	20	2-644753-0
75.29	2.964	19	1-644753-9
71.32	2.808	18	1-644753-8
67.36	2.652	17	1-644753-7
63.40	2.496	16	1-644753-6
59.44	2.340	15	1-644753-5
55.47	2.184	14	1-644753-4
51.51	2.028	13	1-644753-3
47.55	1.872	12	1-644753-2
43.59	1.716	11	1-644753-1
39.62	1.560	10	1-644753-0
35.66	1.404	9	644753-9
31.70	1.248	8	644753-8
27.74	1.092	7	644753-7
23.77	.936	6	644753-6
19.81	.780	5	644753-5
15.85	.624	4	644753-4
11.89	.468	3	644753-3
7.92	.312	2	644753-2
MM	[IN]	NUMBER OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN S. HOOVER	07N0V02	 TE Connectivity	
		CHK D. BOSSI	07N0V02		
DIMENSIONS: INCHES		TOLERANCES, UNLESS OTHERWISE SPECIFIED: 0 PLC ± — 2 PLC ± — 2 PLC ± .005 3 PLC ± — ANGLES ± —		NAME MTA-156 HEADER ASSEMBLY, FRICTION LOCK, STRAIGHT .045 ROUND POST, TIN PLATED, SPECIAL	
		PRODUCT SPEC —			
MATERIAL 		APPLICATION SPEC —		SIZE A1	
FINISH 		WEIGHT —		CAGE CODE 00779	
		CUSTOMER DRAWING		DRAWING NO C=644753	
				RESTRICTED TO —	
				SCALE 5:1	
				SHEET 1 OF 1	
				REV F	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-644753-3](#)