

Surface Mount Fuse, 3.2 x 1.6 mm, Super-Quick-Acting FF, 63 VDC / 125 VAC, low impedance



Exemplary part photo depending on part no.

UL 248-14 · 125 VAC · 63 VDC · Super-Quick-Acting FF

See below:

[Approvals and Compliances](#)

Description

- Complements USF 1206 with lower current ratings
- Impermeable to potting compound

Unique Selling Proposition

- Lowest voltage drop
- Very fast, precise opening

Applications

- Smart meters
- Battery protection
- Sensors
- Mobile devices
- Semiconductor protection

References

[Packaging Details](#)

Weblinks

[pdf data sheet](#), [html data sheet](#), [General Product Information](#), [Packaging details](#), [Distributor-Stock-Check](#), [Detailed request for product](#), [Microsite](#)

Technical Data

Rated Voltage	125 VAC, 63 VDC
Rated current	0.05 - 0.25 A
Breaking Capacity	100 A
Characteristic	Super-Quick-Acting FF
Mounting	PCB, SMT
Admissible Ambient Air Temp.	-55 °C to 90 °C
Climatic Category	55/090/21 acc. to IEC 60068-1
Material: Housing	Fiber-reinforced plastic, UL 94V-0
Material: Terminals	Gold-Plated Copper Alloy
Unit Weight	0.0133 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	Letter (see variants)

Soldering Methods	Reflow Soldering Profile
Solderability	245 °C / 3 sec acc. to IEC 60068-2-58, Test Td
Resistance to Soldering Heat	260 +0/-5 °C / 30 sec acc. to IPC/JEDEC J-STD-020D, Level 1
Moisture Sensitivity Level	MSL 1, J-STD-020
Case Resistance	acc. to EIA/IS-722, Test 4.7 >100 MΩ (between leads and body)
Thermal Shock	IEC 60068-2-14, CECC 4200 (5 Cycles 40 °C - 125 °C)
Moisture Resistance Test	MIL-STD-202C, Method 103 B (Level 1) IPC/JEDEC-J-STD-20C (85 °C@85%RH@240h)
Resistance to Solvents	MIL-STD-202, Method 215 (EIA-722, 4.11)
Terminal Strength	MIL-STD-202, Method 211A (Deflection of board 1 mm for 1 minute)

Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [Details about Approvals](#)

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

Approvals

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products.

Approval Reference Type: USFF 1206

Approval Logo



Certificates

[UL Approvals](#)

Certification Body

UL

Description

UL File Number: E41599

Product standards

Product standards that are referenced

Organization	Design	Standard	Description
	Designed according to	UL 248-14	Low voltage fuses - Part 14: Additional fuses
	Designed according to	CSA22.2 No. 248.14	Low-Voltage Fuses - Part 14: Supplemental Fuses

Application standards

Application standards where the product can be used

Organization	Design	Standard	Description
	Designed for applications acc.	IEC/UL 60950	IEC 60950-1 includes the basic requirements for the safety of information technology equipment.

Compliances



The product complies with following Guide Lines

Identification	Details	Initiator	Description
	CE declaration of conformity	SCHURTER AG	The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008.
	RoHS	SCHURTER AG	EU Directive RoHS 2011/65/EU
	China RoHS	SCHURTER AG	The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.
	Halogen Free	SCHURTER AG	SCHURTER strives to offer our customers halogen free products.
	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.


Dimension [mm]

 3.2 mm

Reflow soldering pads





Derating Curves

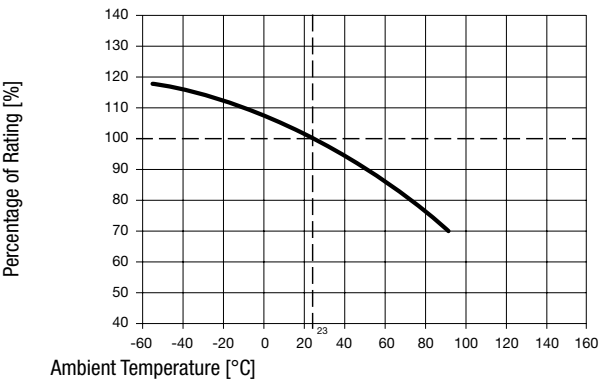

Pre-Arcing Time

Rated Current I_n	1.0 x I_n min.	2.5 x I_n max.	10.0 x I_n min.	10.0 x I_n max.
0.05 A	4 h	5 s	0.1 ms	1 ms
0.125 A	4 h	5 s	0.1 ms	3 ms
0.16 A - 0.25 A	4 h	5 s	0.1 ms	1 ms

Time-Current-Curves

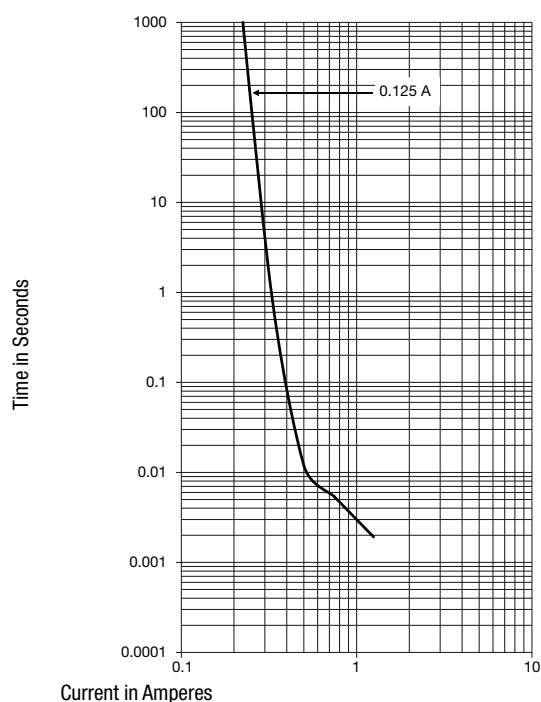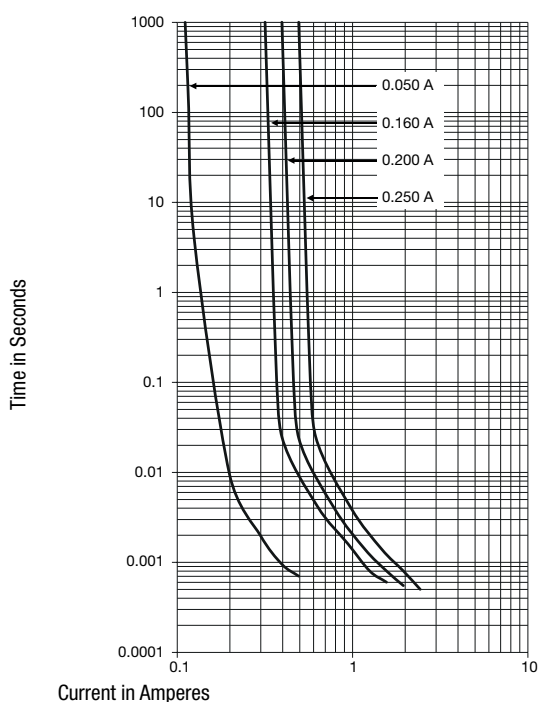

All Variants

Rated Current [A]	Rated Voltage [VAC]	Rated Voltage [VDC]	Marking	Breaking Capacity	Voltage Drop 1.0 I _n typ. [mV]	Cold Resistance typ. [mΩ]	Melting I ² t 8.0 I _n typ. [A ² s]		Order Number
0.05	125	63	e	1)	430	8350	0.0002	●	3413.0002.11
0.05	125	63	e	1)	430	8350	0.0002	●	3413.0002.22
0.05	125	63	e	1)	430	8350	0.0002	●	3413.0002.24
0.05	125	63	e	1)	430	8350	0.0002	●	3413.0002.26
0.125	125	63	o	1)	260	2000	0.003	●	3413.0006.11
0.125	125	63	o	1)	260	2000	0.003	●	3413.0006.22
0.125	125	63	o	1)	260	2000	0.003	●	3413.0006.24
0.125	125	63	o	1)	260	2000	0.003	●	3413.0006.26
0.16	125	63	s	1)	95	510	0.0015	●	3413.0008.11
0.16	125	63	s	1)	95	510	0.0015	●	3413.0008.22
0.16	125	63	s	1)	95	510	0.0015	●	3413.0008.24
0.16	125	63	s	1)	95	510	0.0015	●	3413.0008.26
0.2	125	63	u	1)	87	365	0.0029	●	3413.0009.11
0.2	125	63	u	1)	87	365	0.0029	●	3413.0009.22
0.2	125	63	u	1)	87	365	0.0029	●	3413.0009.24
0.2	125	63	u	1)	87	365	0.0029	●	3413.0009.26
0.25	125	63	w	1)	75	255	0.0032	●	3413.0010.11
0.25	125	63	w	1)	75	255	0.0032	●	3413.0010.22
0.25	125	63	w	1)	75	255	0.0032	●	3413.0010.24
0.25	125	63	w	1)	75	255	0.0032	●	3413.0010.26

Rated Cur- rent [A]	Rated Vol- tage [VAC]	Rated Vol- tage [VDC]	Marking	Breaking Capacity	Voltage Drop 1.0 I _n typ. [mV]	Cold Resi- stance typ. [mΩ]	Melting I ² t 8.0 I _n typ. [A²s] c 	Order Number
------------------------	--------------------------	--------------------------	---------	----------------------	---	-----------------------------------	--	--------------

 Most Popular:

Availability for all products can be searched real-time:<https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

1) 10 A @ 125 VAC, 100 A @ 32 VAC, 100 A @ 63 VDC

Packaging Unit	.xx = .11 Blister Tape of 100 pcs. in Plastic Bag .xx = .22 Blister Tape 18 cm Reel (1000 pcs.) .xx = .24 Blister Tape 25.4 cm Reel (5000 pcs.) .xx = .26 Blister Tape 33 cm Reel (10000 pcs.)
-----------------------	---