

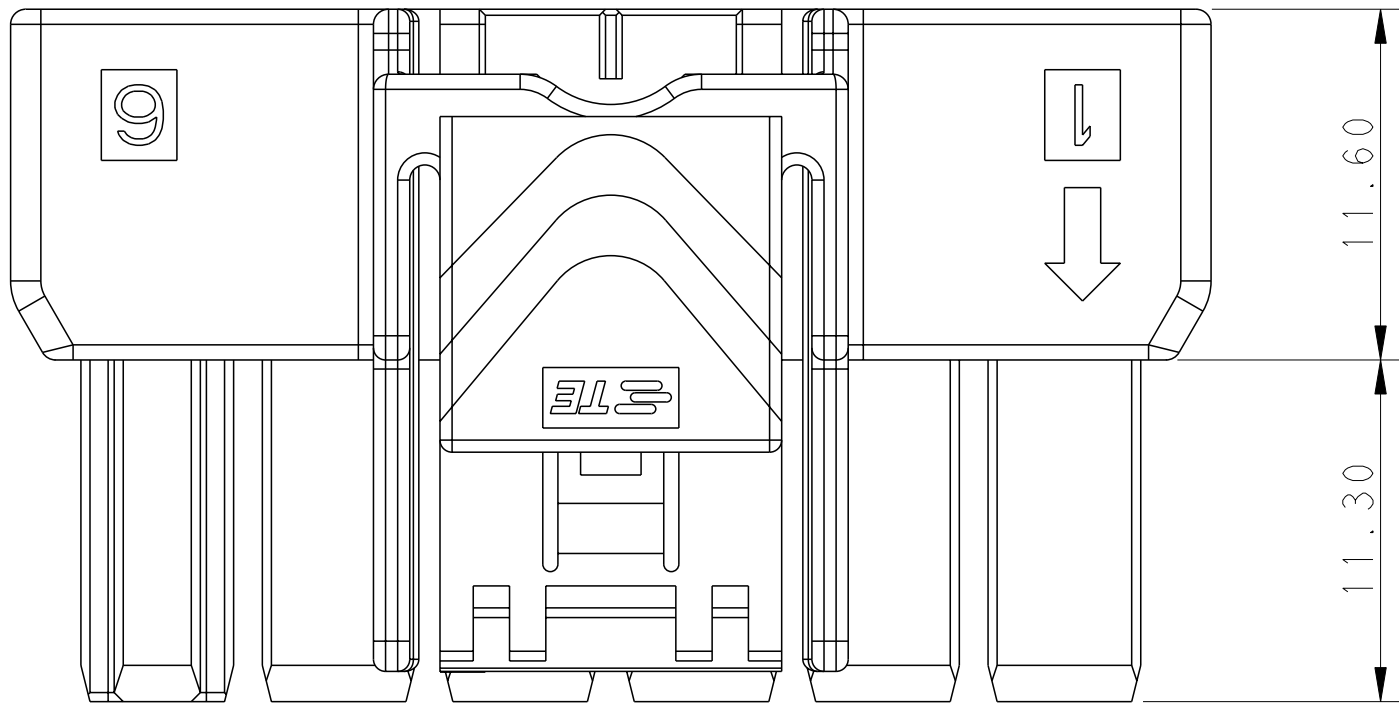
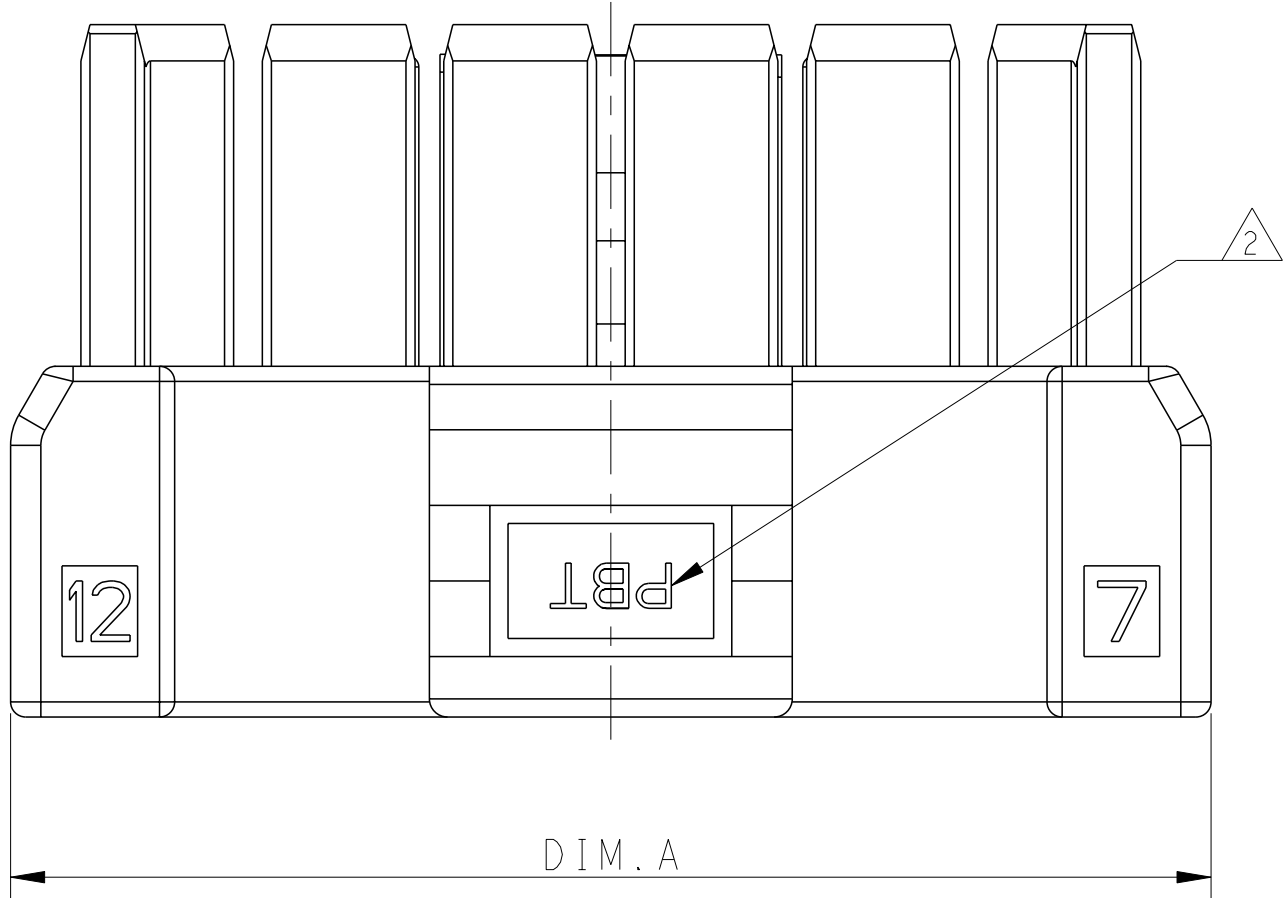
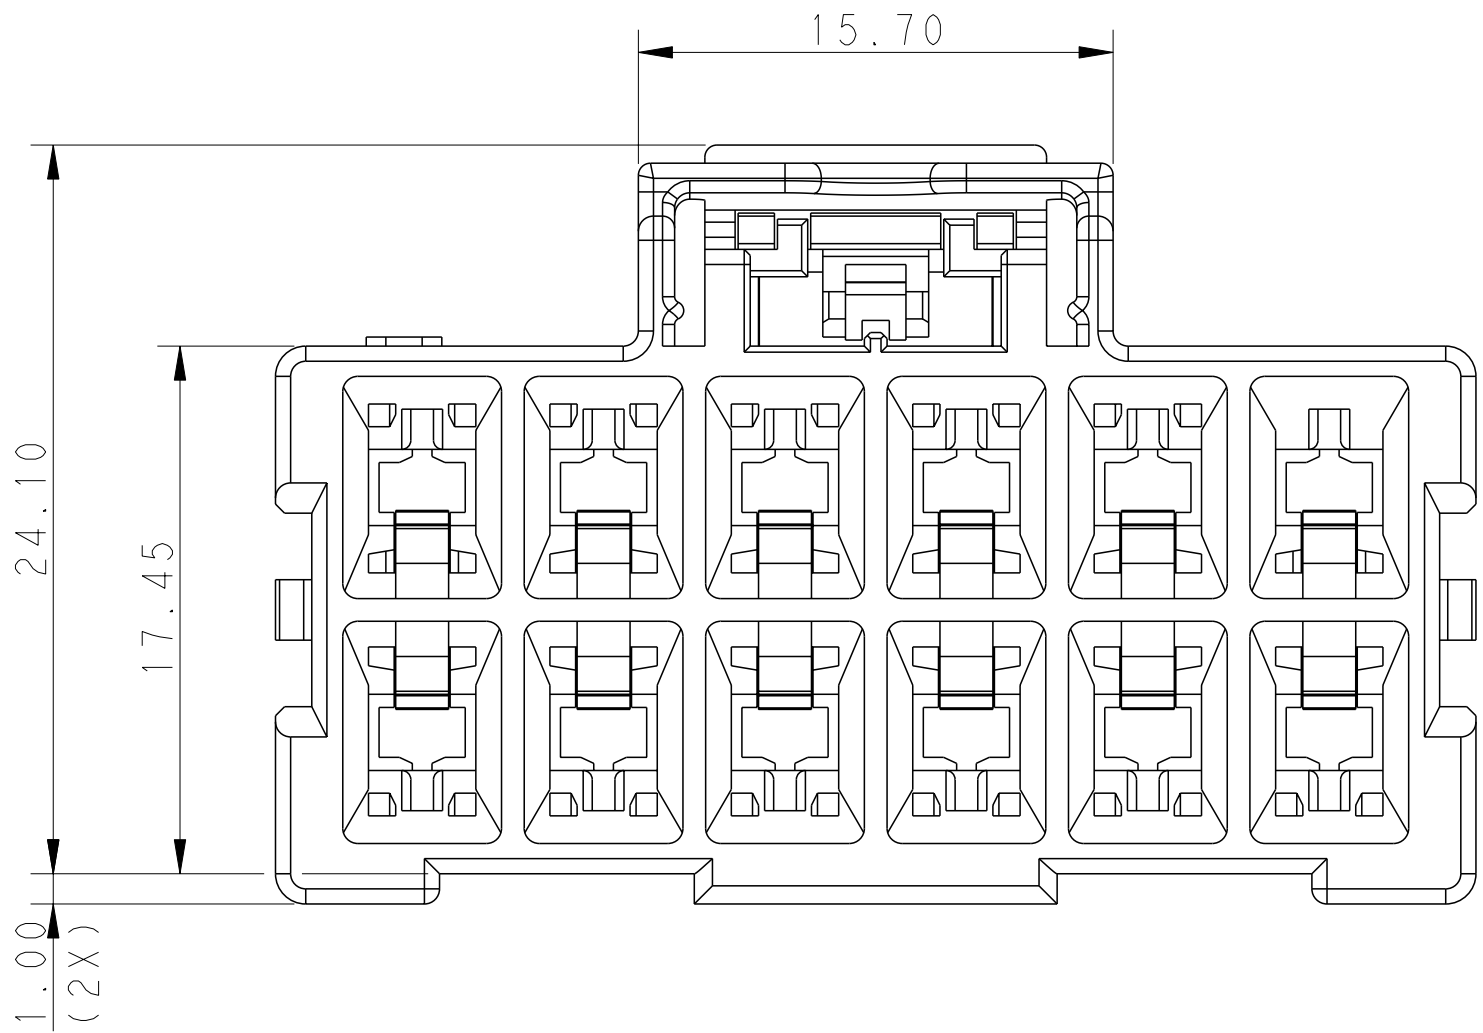


LOC		DIST		REVISIONS				
P	LYR	DESCRIPTION			DATE	DWN	APVD	
		D			30 JUN 16	RS	GJ	

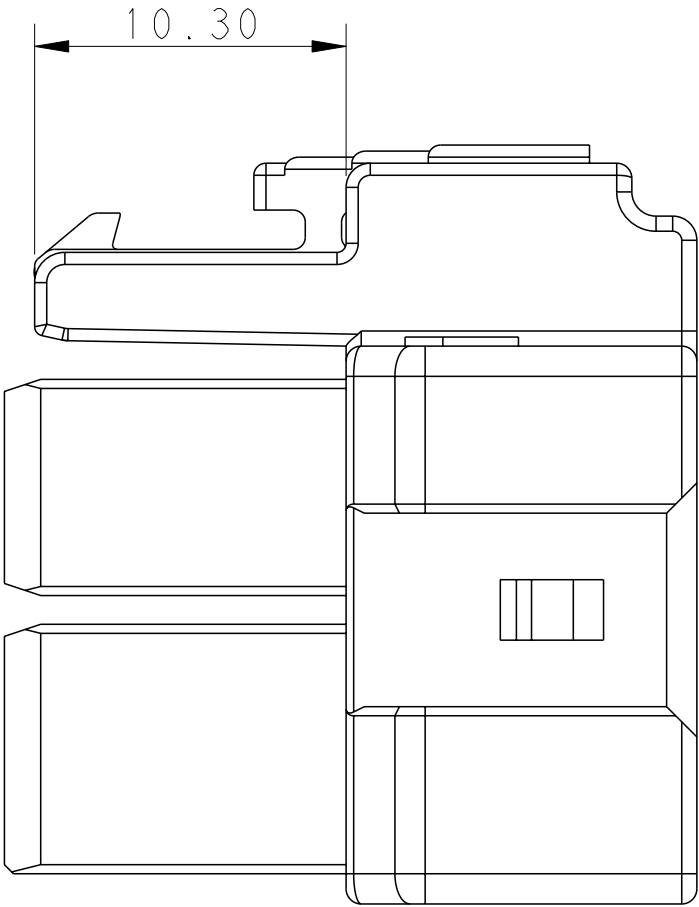

POS.	DIM. A
2*6	39.70
2*5	33.70
2*4	27.70
2*3	21.70

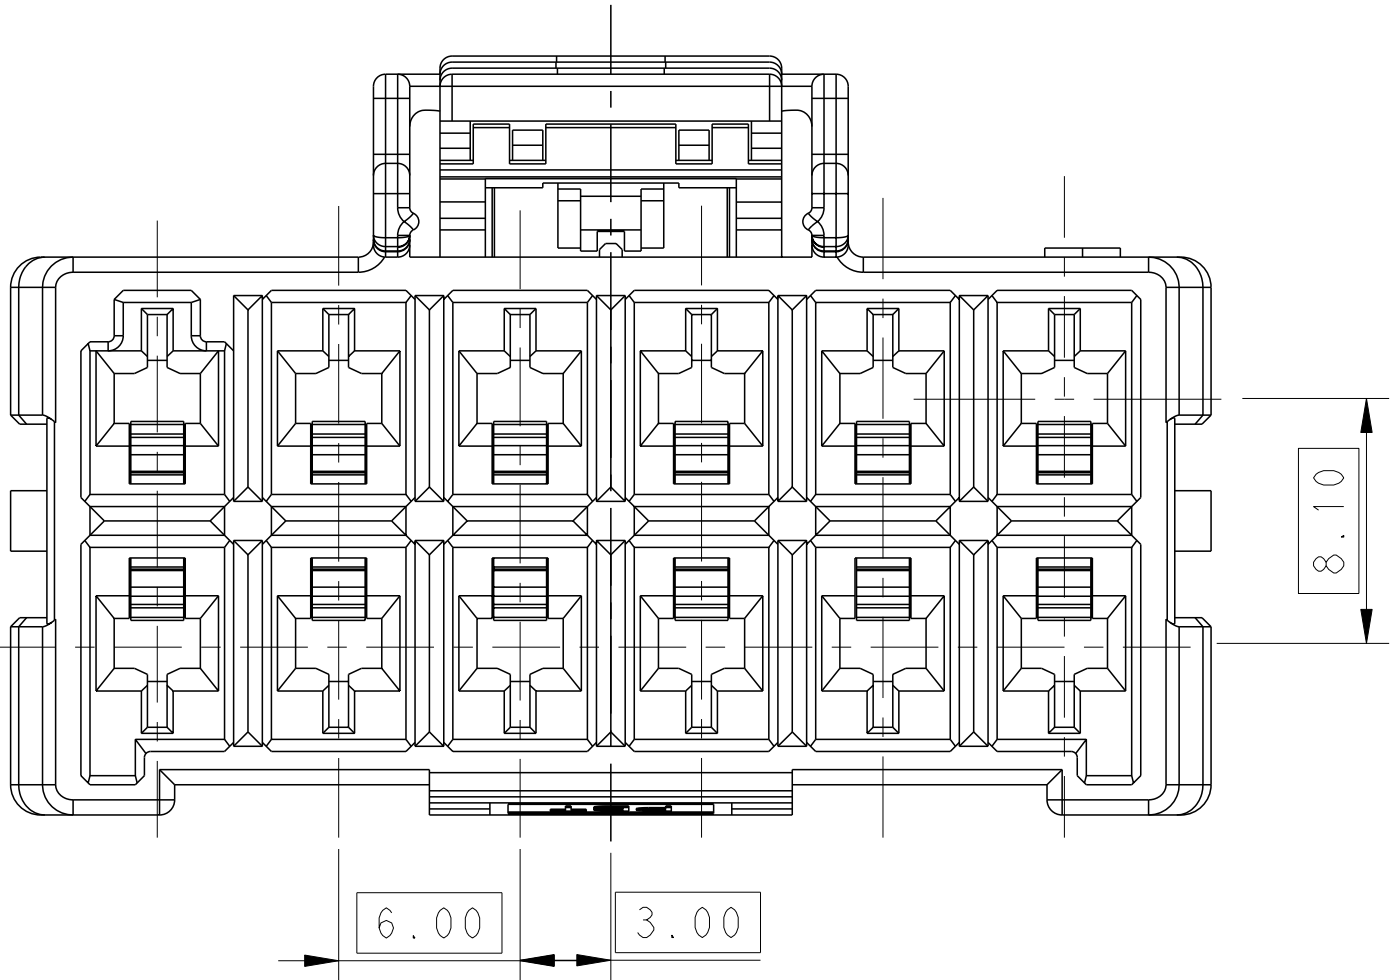

- 1

MATERIAL:
LEVEL 1:PBT,STANDARD TEMPERATURE 105°C
KEY A:NATURAL; KEY B:PURPLE; KEY C:BLUE; KEY D:YELLOW

LEVEL 2:NYLON,HIGH TEMPERATURE 150°C
KEY A:LIGHT GREY; KEY B:RED; KEY C:BLACK; KEY D:NATURAL
- 2

MATERIAL MARK:
LEVEL 1:PBT,LEVEL 2:HDT
- 3


APPLICABLE CONTACT P/N
RECEPTACLE CONTACT:1971237/1971779/81/83/85/87-*, 2238066-*
- 4

MATING CONN, P/N
CAP HSG: *-1971774/5-
TPA (LOCKING PLATE): *-1971778-*


5 This product has not completed validation testing.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN TOMMY WU 09JUL2012	TE TE Connectivity	
DIMENSIONS:		CHK HAPYE WU 09JUL2012		
mm		APVD YUHONG MAO 09JUL2012		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC		
0 PLC ±-		108-106118	NAME PLUG HOUSING, DOUBLE ROW POWER TRIPLE LOCK -	
1 PLC ±0.35		APPLICATION SPEC		
2 PLC ±0.25		114-106118	SIZE CAGE CODE DRAWING NO	
3 PLC ±-		WEIGHT	A100779C=1971776	
4 PLC ±-		Customer Drawing	RESTRICTED TO	
ANGLES		SCALE 4:1	SHEET 1 OF 2	
FINISH			REV D	


LOC	DIST	REVISIONS					
		P	LYR	DESCRIPTION	DATE	DWN	APVD
-	-	-	-	SEE SHEET 1	-	-	-
		</					

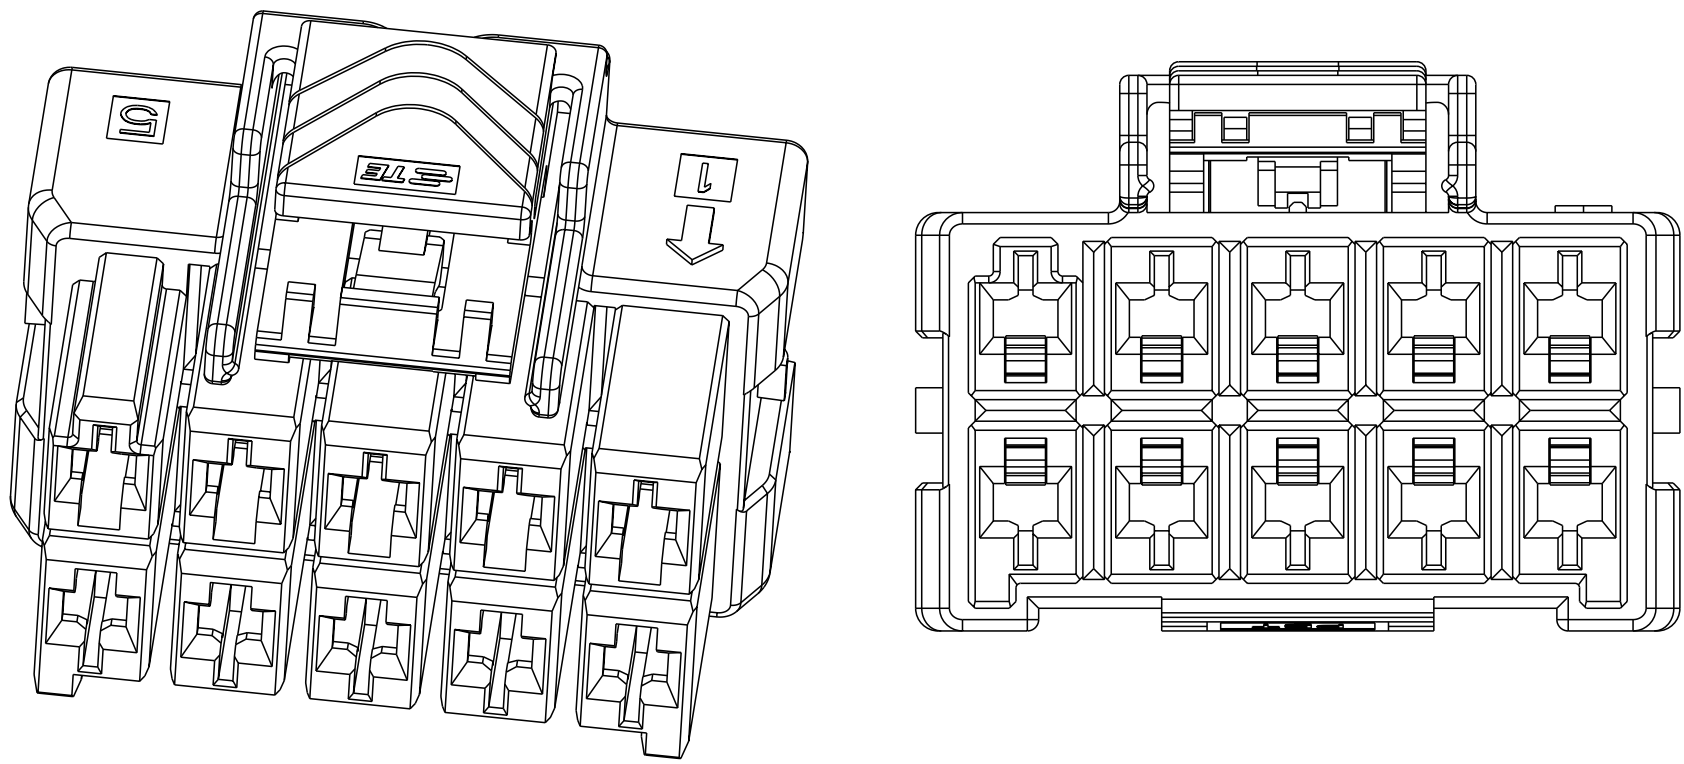


2*5 POSITIONS

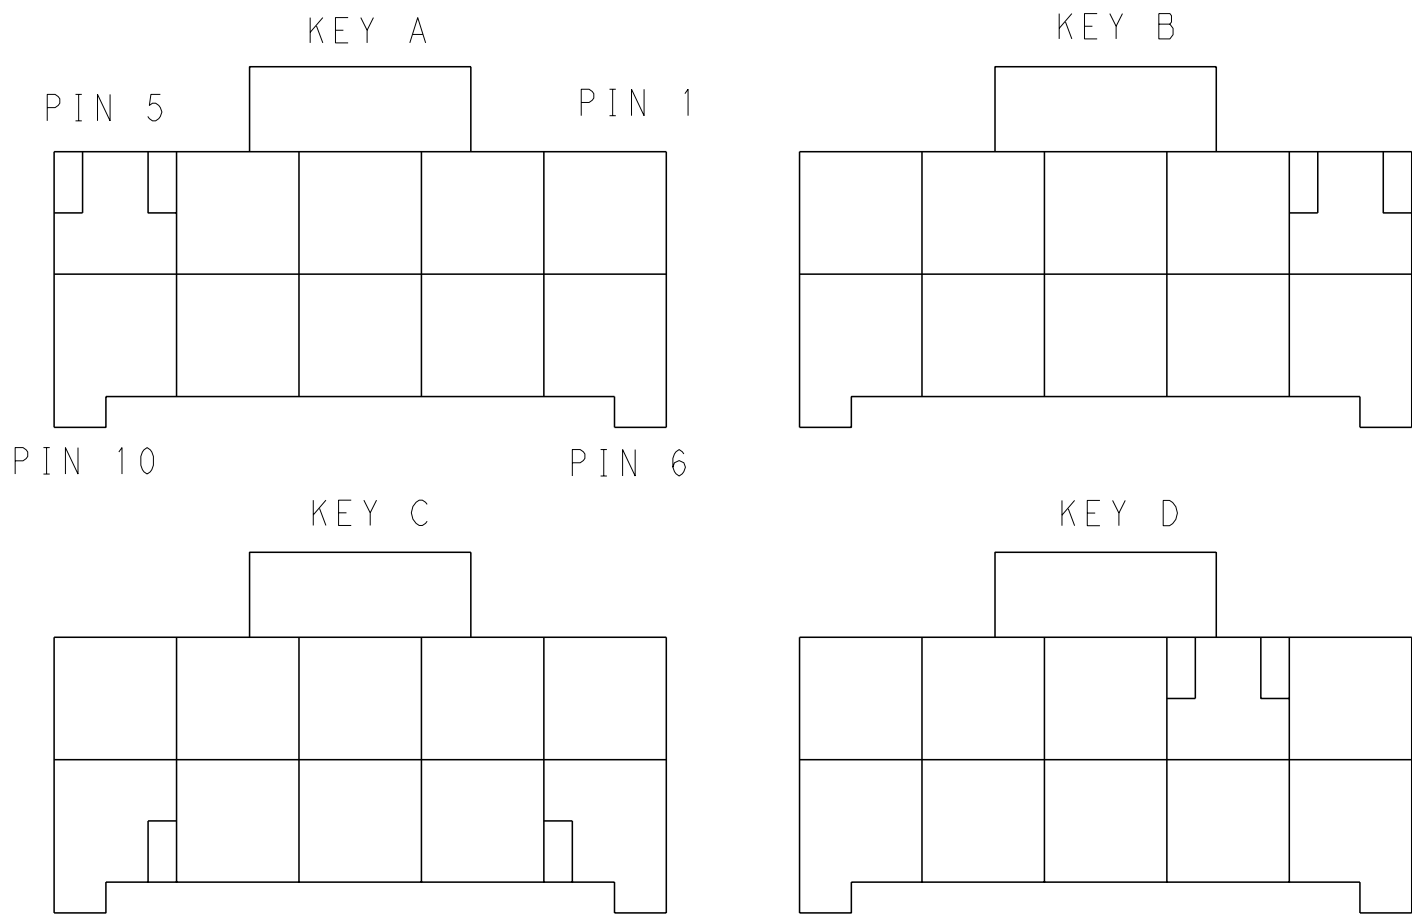


KEYING FOR 2*5 POS.

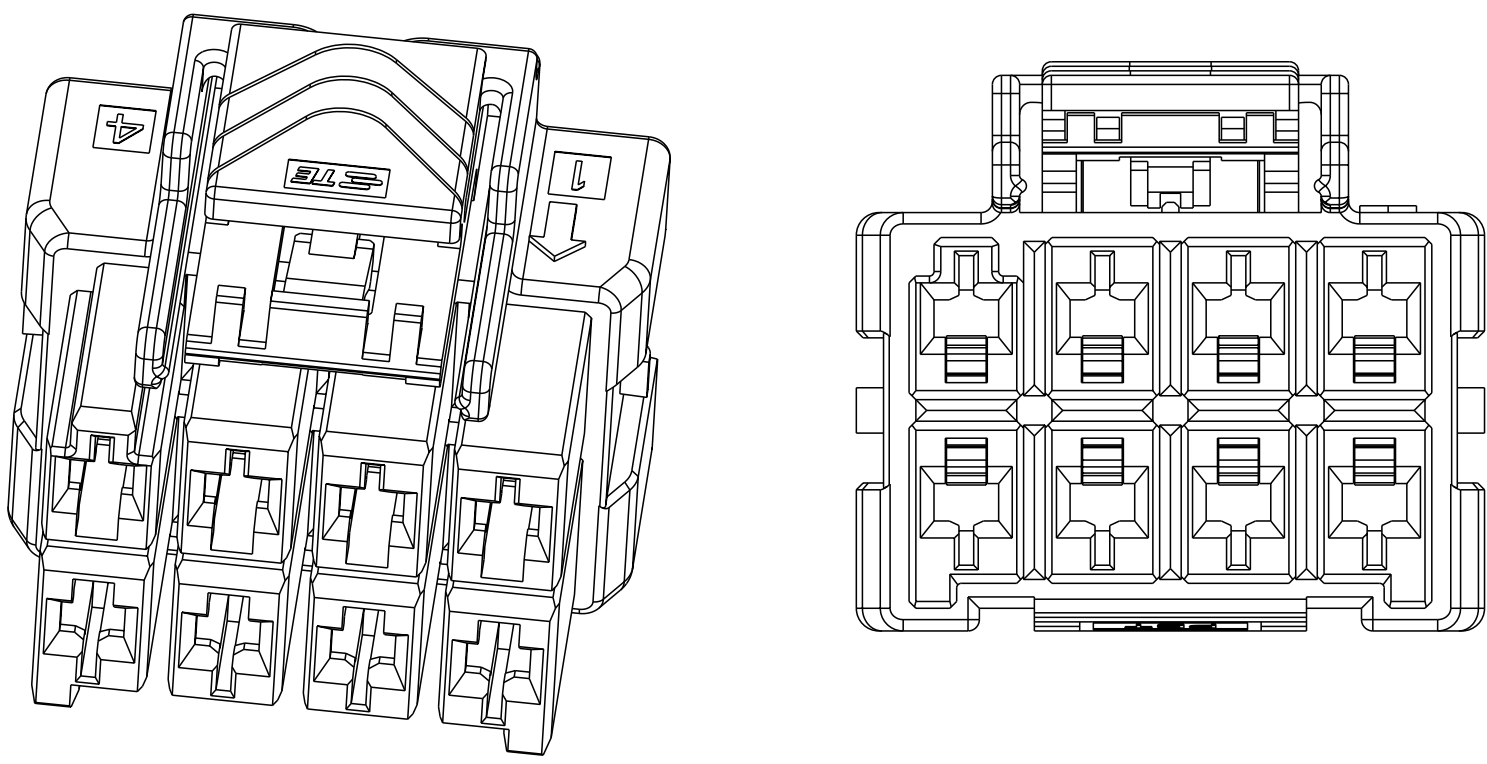


2*4 POSITIONS

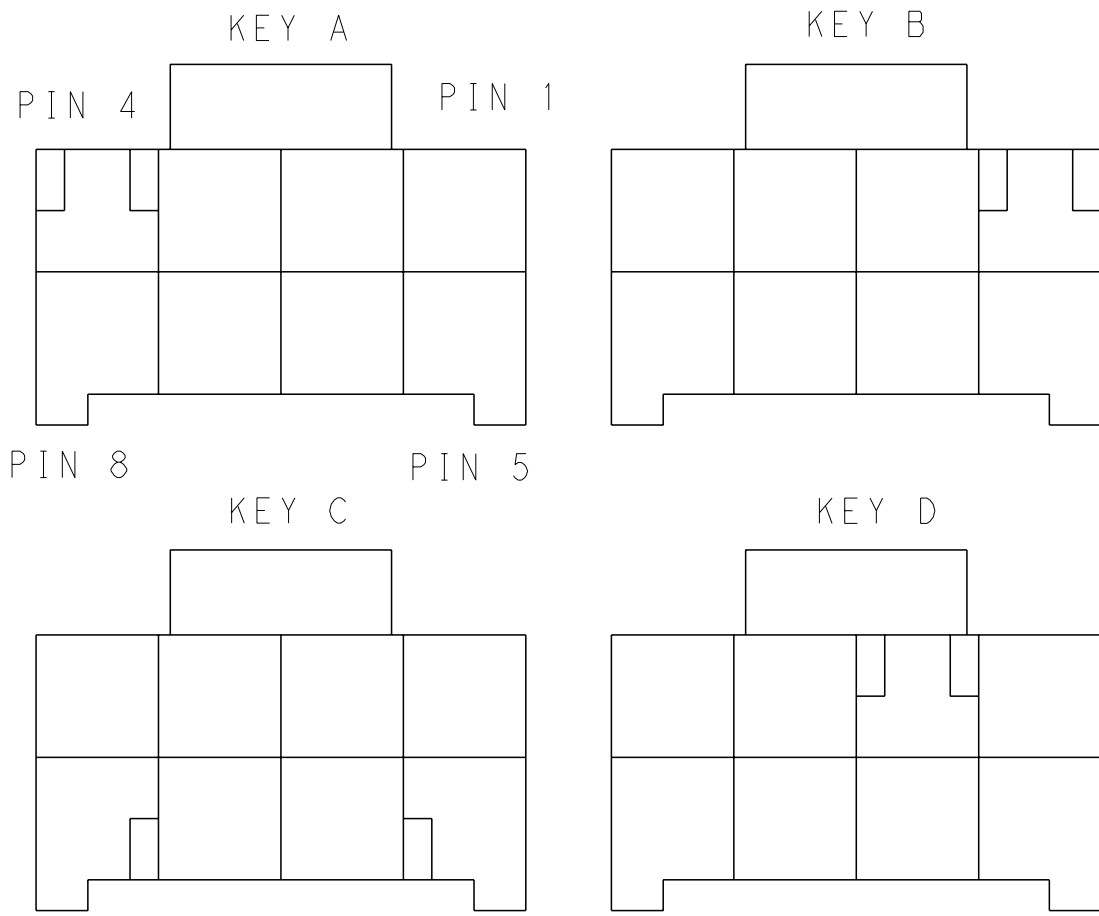

KEYING FOR 2*4 POS.

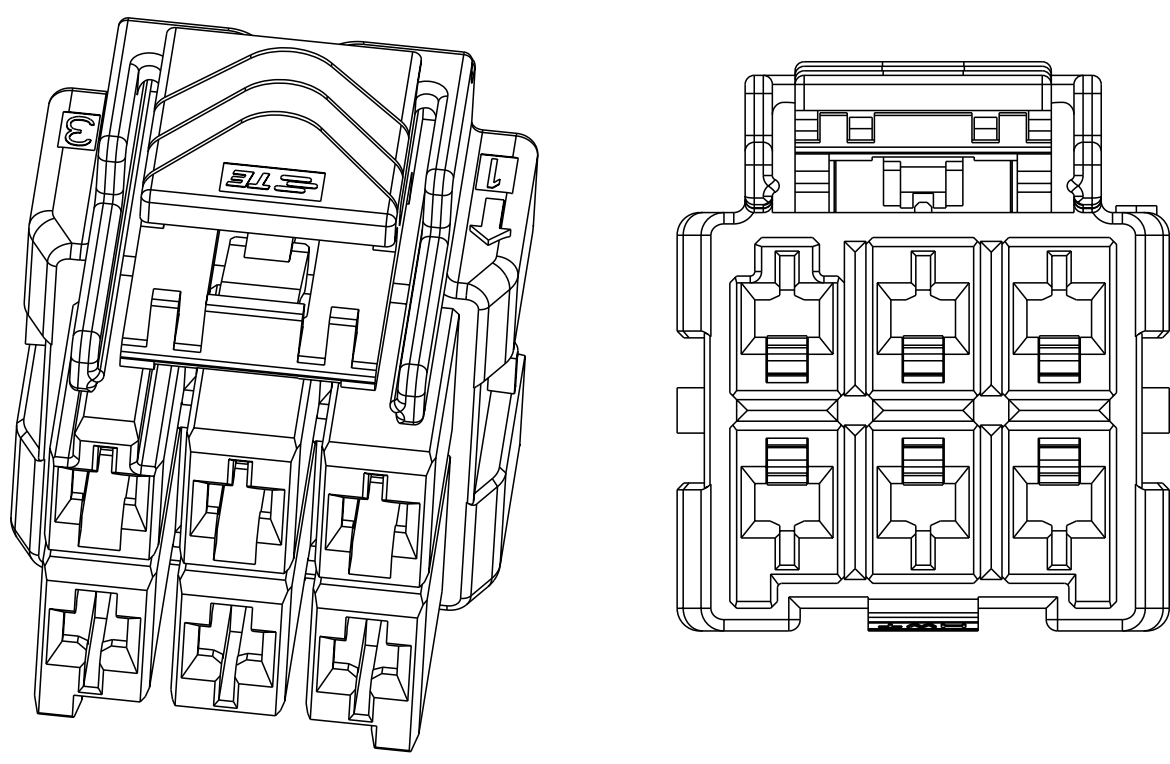


2*3 POSITIONS

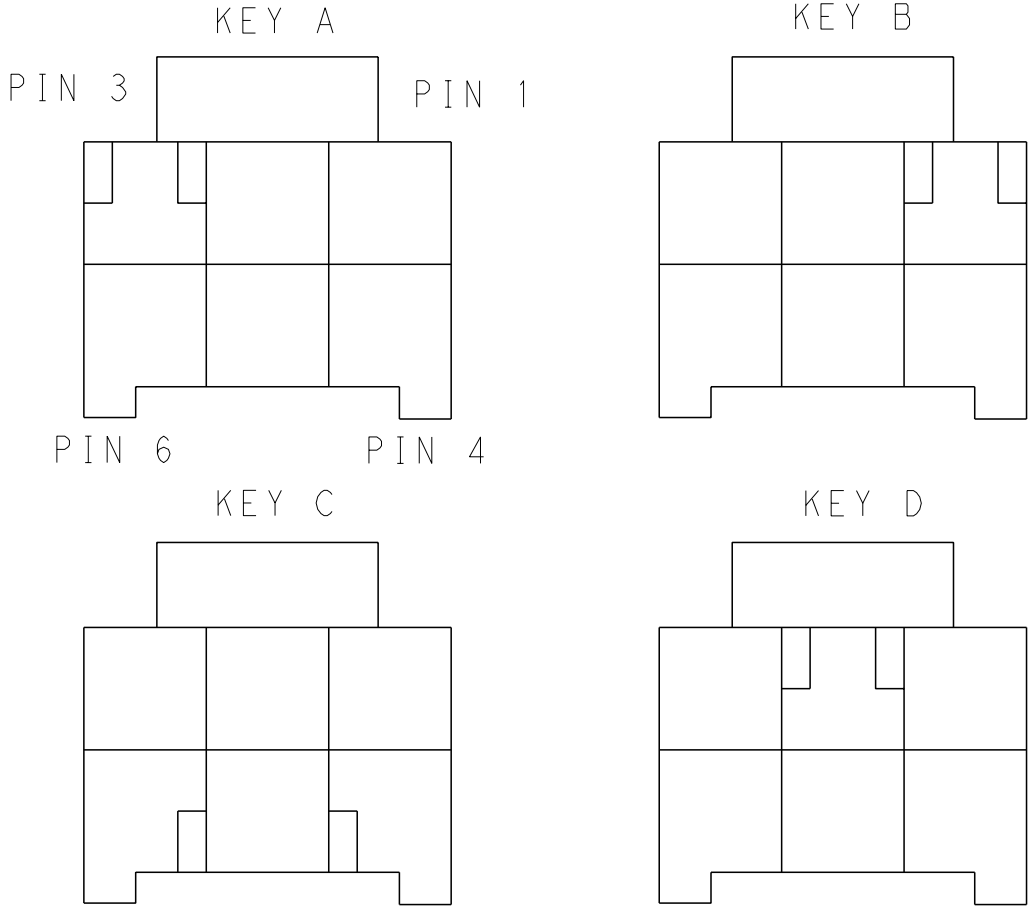


KEYING FOR 2*3 POS.

2*6	LEVEL 1	KEY A	1-1971776-6
		KEY B	2-1971776-6
		KEY C	3-1971776-6
		KEY D	4-1971776-6
	LEVEL 2	KEY A	5-1971776-6
		KEY B	6-1971776-6
		KEY C	7-1971776-6
		KEY D	8-1971776-6
2*5	LEVEL 1	KEY A	1-1971776-5
		KEY B	2-1971776-5
		KEY C	3-1971776-5
		KEY D	4-1971776-5
	LEVEL 2	KEY A	5-1971776-5
		KEY B	6-1971776-5
		KEY C	7-1971776-5
		KEY D	8-1971776-5
POS.	MATERIAL	KEY	P/N

2*4	LEVEL 1	KEY A	1-1971776-4
		KEY B	2-1971776-4
		KEY C	3-1971776-4
		KEY D	4-1971776-4
	LEVEL 2	KEY A	5-1971776-4
		KEY B	6-1971776-4
		KEY C	7-1971776-4
		KEY D	8-1971776-4
2*3	LEVEL 1	KEY A	1-1971776-3
		KEY B	2-1971776-3
		KEY C	3-1971776-3
		KEY D	4-1971776-3
	LEVEL 2	KEY A	5-1971776-3
		KEY B	6-1971776-3
		KEY C	7-1971776-3
		KEY D	8-1971776-3
POS.	MATERIAL	KEY	P/N

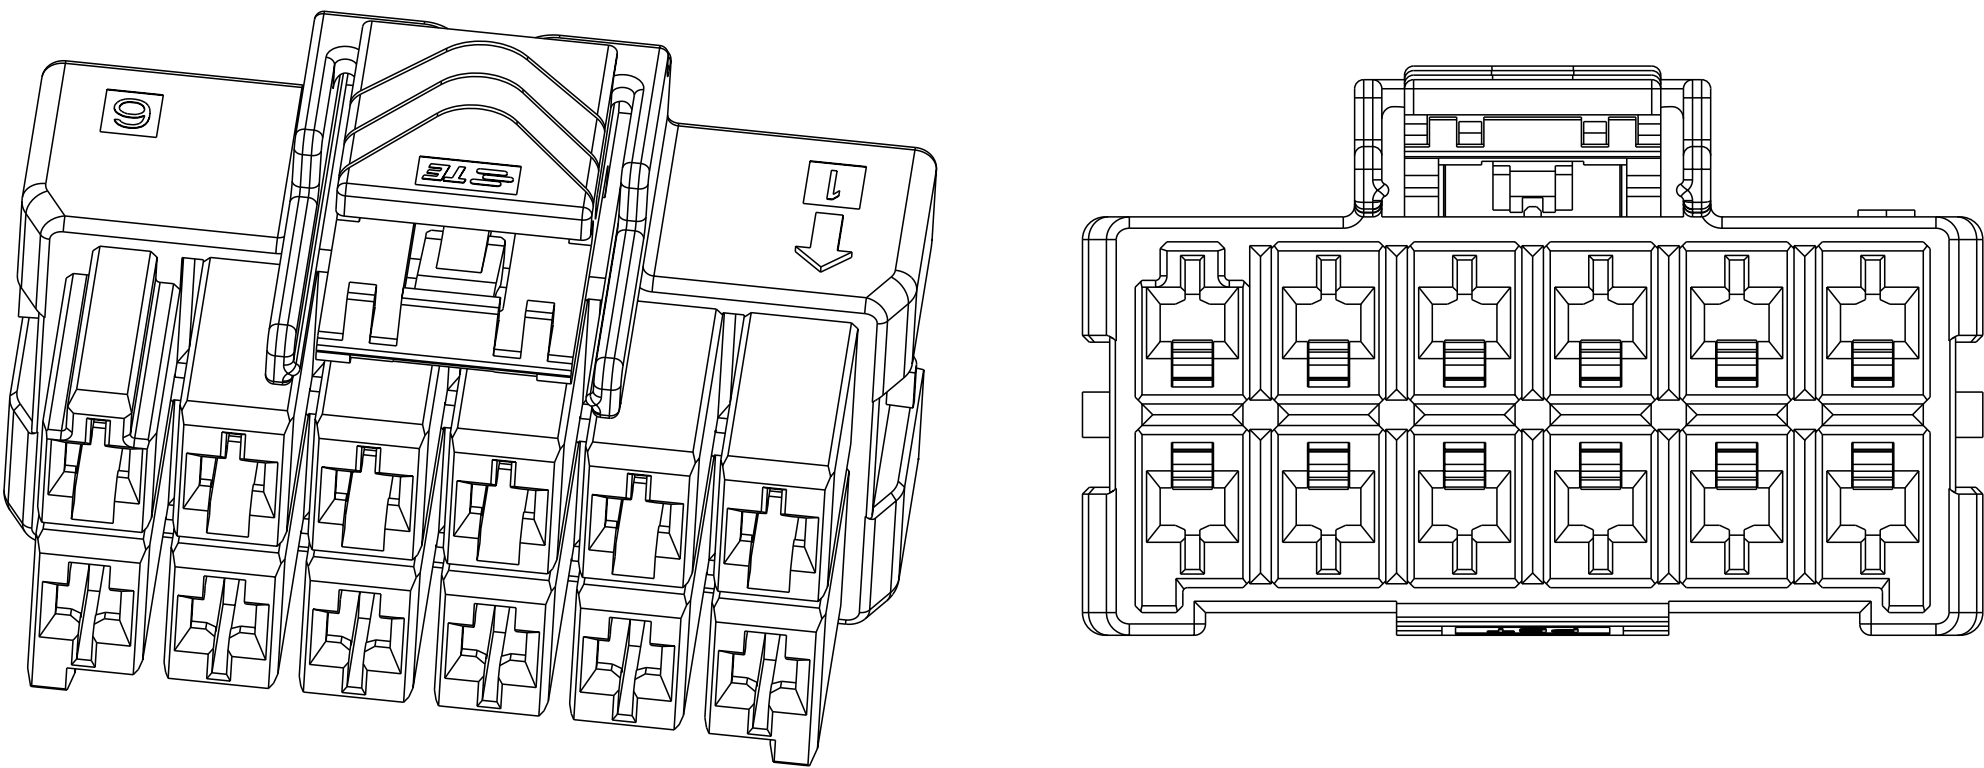

2*6 POSITIONS

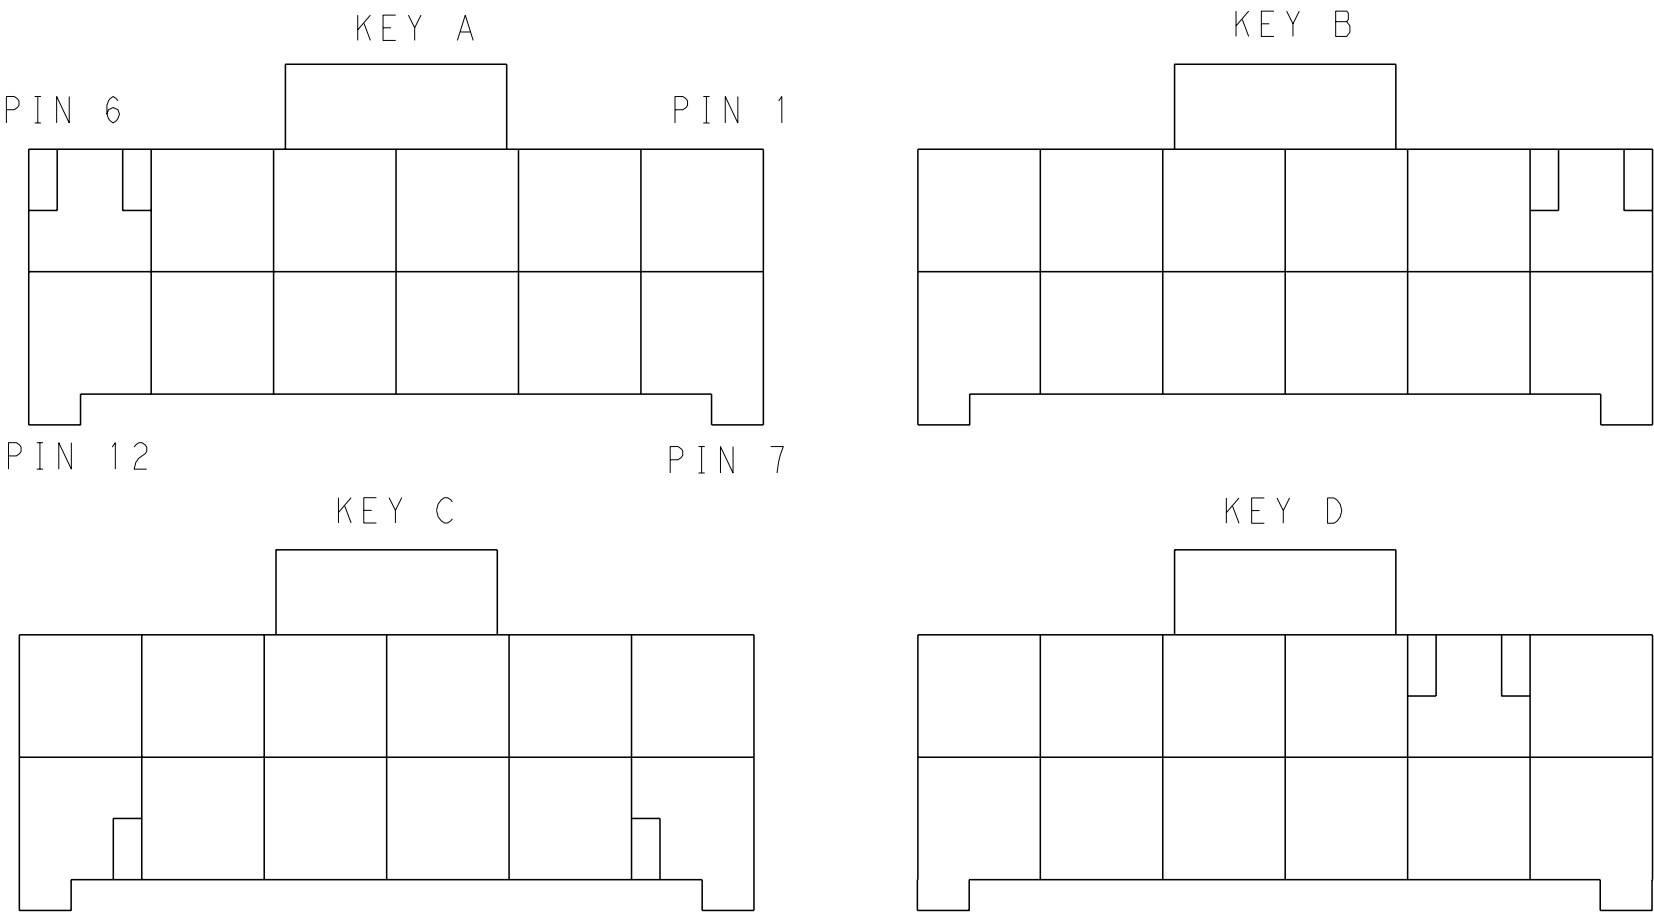

KEYING FOR 2*6 POS.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWG TOMMY WU 09JUL2012
CHK HAPYE WU 09JUL2012
APVD YUZHONG MAO 09JUL2012

NAME

DIMENSIONS:

mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±°

1 PLC ±0.35

2 PLC ±0.25

3 PLC ±°

4 PLC ±°

ANGLES FINISH ±°

PRODUCT SPEC

108-106118

APPLICATION SPEC

114-106118

WEIGHT

Customer Drawing

TE Connectivity

PLUG HOUSING, DOUBLE ROW
POWER TRIPLE LOCK

SIZE CAGE CODE DRAWING NO

A100779C=1971776

RESTRICTED TO

-

SCALE 4:1

SHEET 2 OF 2

REV D

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-1971776-3](#)