

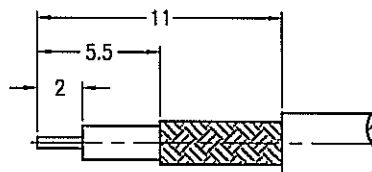
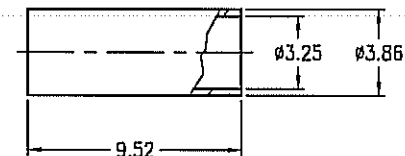


1. MATERIALS AND FINISHES
BARREL - BRASS, NICKEL PLATING
CONTACT - BRASS, GOLD PLATING
INSULATOR - PTFE, NATURAL
2. ELECTRICAL:
A. IMPEDANCE: 50 OHM
B. WORKING VOLTAGE: 250 VRMS
3. MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: - 40°C to +125°C/21 DAYS
4. FERRULE CRIMPING TOOLS P/N
227-944(M22520/5.01)
227-1221-03A(M22520/5.03A) HEX:3.25 L=8.25
5. PACKAGING IN BAG WITH COMMERCIAL PART NUMBER AND DATE CODE

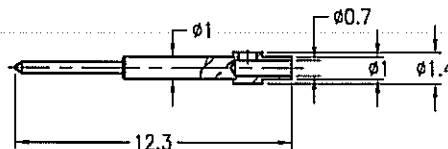

RECOMMENDED CABLE STRIPPING DIM'S

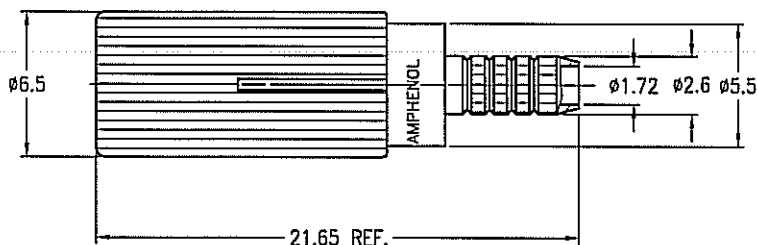

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: 0.5 - 6mm 6 - 30mm 30 - 120mm ANGLES ±0.1mm ±0.2mm ± 0.3mm ±1° NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp. to any person or to any other person for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	MATERIAL	DRAWN KERRY	DATE 15-Jan-01	TITLE 1.0/2.3 CRIMP PLUG (FOR L910/22,RG179B/U, KX3B,KX22A,RG174/U CABLE)			Amphenol RF Danbury CT USA, Tainan Taiwan, Shenzhen China www.amphenolrf.com	
	REFERENCE	ENGINEER ROBIN	DATE 15-Jan-01				DRAWING NO. 3C-920-06	
		APPROVED ROBIN	DATE 15-Jan-01	SCALE: 3/1	SHEET 2 OF 2		ITEM NO. 3C-920-06	
	FINISH	CAD FILE F:\DWG\ASF\3C\920\06SZ			DWG SIZE B	CODE ID 74868	REV C	PART NO. 102-920-06

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[102-920-06](#)