

## Power PCB Relay RPII/1

- 1 pole 8/12/16A, 1 form C (CO) or 1 form A (NO) contact
- 4kV/8mm coil-contact
- Pinning 3.5 or 5mm (8/12A) and 5mm (16A)
- RoHS compliant (Directive 2011/65/EC)

## Typical applications

Power supplies, domestic appliances, heating control, installation



F0146-B

**Approvals**



VDE Cert. No. 40025448, UL E214025

Technical data of approved types on request

Contact Data	8A	12A	16A
Contact arrangement	1 form C (CO) or 1 form A (NO)		
Rated voltage	250VAC		
Max. switching voltage	400VAC		
Rated current	8A	12A	16A
Limiting making current	16A	20A	25A
Breaking capacity max.	2000VA	3000VA	4000VA
Contact material	AgNi0.15	AgCdO	AgCdO
Frequency of operation, with/without load	600/72000h <sup>-1</sup>		
Operate/release time typ.	8/2ms		
Bounce time typ., form A/form B	2/4ms		

**Contact ratings**

Type	Contact	Load	Cycles
<b>IEC61810</b>			
RP310	A (NO)	16A, 250VAC resistive, 35°C	100x10 <sup>3</sup>
RP410/418	A (NO)	12A, 250VAC resistive, 35°C	100x10 <sup>3</sup>
RP410/418	C (CO)	10A, 250VAC resistive, 70°C	100x10 <sup>3</sup>
RP411/418	A (NO)	8A, 250VAC resistive, 35°C	100x10 <sup>3</sup>

 Mechanical endurance >30x10<sup>6</sup> operations

**Coil Data**


Coil voltage range	5 to 110VDC
Operative range, IEC 61810	2

**Coil versions, DC coil**

Coil code	Rated voltage VDC	Operate voltage VDC	Release voltage VDC	Coil resistance $\Omega \pm 10\%$ <sup>1)</sup>	Rated coil power mW
005	5	3.5	0.5	54	500
006	6	4.2	0.6	68	500
012	12	8.4	1.2	270	500
024	24	16.8	2.4	1100 <sup>1)</sup>	500
048	48	33.6	4.8	4400 <sup>1)</sup>	500
060	60	42.0	6.0	6540 <sup>1)</sup>	500
110	110	77.0	11.0	23100 <sup>1)</sup>	500

 1) Coil resistance  $\pm 15\%$ .

 All figures are given for coil without pre-energization, at ambient temperature +20°C.  
 Other coil voltages on request.

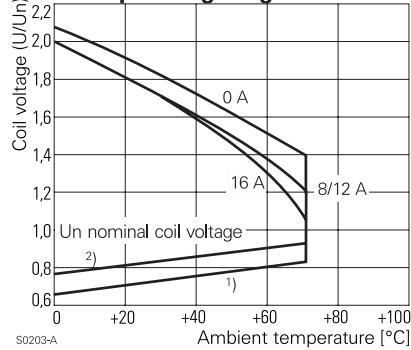**Coil operating range DC**

**Insulation Data**

Initial dielectric strength between open contacts	1000V <sub>rms</sub>
between contact and coil	4000V <sub>rms</sub>

Clearance/creepage between contact and coil	$\geq 8/8\text{mm}$
---	---------------------

Material group of insulation parts IIIa


**Power PCB Relay RPII/1 (Continued)**
**Other Data**

Material compliance: EU RoHS/ELV, China RoHS, REACH, Halogen content refer to the Product Compliance Support Center at [www.te.com/customersupport/rohssupportcenter](http://www.te.com/customersupport/rohssupportcenter)

Ambient temperature	-40 to +70°C
Category of environmental protection	IEC 61810
Vibration resistance (functional), form A/form B, 30 to 300Hz	RTII - flux proof, RTIII - wash tight
Shock resistance (destructive)	10/2g
Terminal type	100g
Weight	PCB-THT
Resistance to soldering heat THT, IEC 60068-2-20	18g
flux proof version	270°C/10s
wash tight version	260°C/5s
Packaging/unit	tube/20 pcs., box/500 pcs.

**Dimensions**




Dimensions in mm






S0273-AA

**PCB layout / terminal assignment**

8/12A, pinning 3.5 mm






8/12A, pinning 5 mm



Bottom view on solder pins  
Dimensions in mm

16A, pinning 5 mm



Typical product code **RP** **3** **1** **0** **024**

**Product code structure**
**Type**

**RP** Power PCB Relay RPII/1

**Version**

**3** 16A, flux proof  
**4** 8/12A, flux proof

**7** 16A, wash tight  
**8** 8/12A, wash tight

**Contact arrangement**

**1** 1 form C contact (1 CO)

**3** 1 form A contact (1 NO)

**Contact material and pinning**

**1** AgNi0.15, 8A, pinning 5mm  
**2** AgNi0.15, 8A, pinning 3.5mm

**0** AgCdO, 12/16A, pinning 5mm  
**8** AgCdO, 12A, pinning 3.5mm

**Coil**

Coil code: please refer to coil versions table

## Power PCB Relay RPII/1 (Continued)

Product code	Version	Contact arrangement	Contact material	Pinning	Coil	Part number
RP310012	16A, flux proof	1 form C (CO) contact	AgCdO	5mm 16A	12VDC	2-1393230-9
RP310024					24VDC	3-1393230-2
RP310048					48VDC	3-1393230-3
RP330012		1 form A (NO) contact			12VDC	4-1393230-7
RP330024					24VDC	4-1393230-9
RP330048					48VDC	5-1393230-1
RP410024	12A, flux proof	1 form C (CO) contact		5mm 8/12A	24VDC	8-1393230-2
RP411024	8A, flux proof		AgNi0.15			9-1393230-5
RP412024				3.5mm		1-1393231-2
RP418012	12A, flux proof		AgCdO		12VDC	2-1393231-5
RP418024					24VDC	2-1393231-8
RP438012		1 form A (NO) contact			12VDC	5-1393231-0
RP710012	16A, wash tight	1 form C (CO) contact		5mm 16A		7-1393231-2
RP710024					24VDC	7-1393231-5
RP730012		1 form A (NO) contact			12VDC	8-1393231-2
RP818012	12A, wash tight			3.5mm		1-1393232-7

This list represents the most common types and does not show all variants covered by this datasheet.

Other types on request

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[RP310F24](#)