
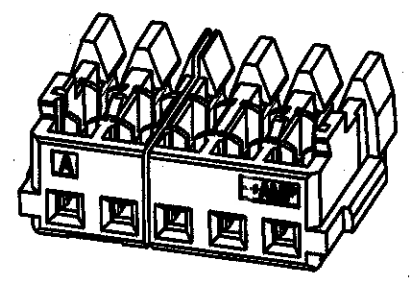
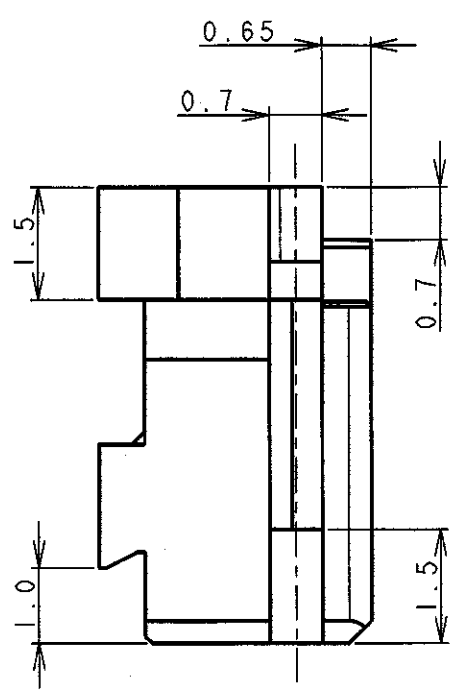




THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 (C) COPYRIGHT ALL RIGHTS RESERVED.

| LOC |     | DIST        |         | REVISIONS |     |      |  |
|-----|-----|-------------|---------|-----------|-----|------|--|
| P   | LTR | DESCRIPTION |         | DATE      | DWN | APVD |  |
|     |     | E2          | REVISED | 29NOV17   | T.Q | W.H  |  |

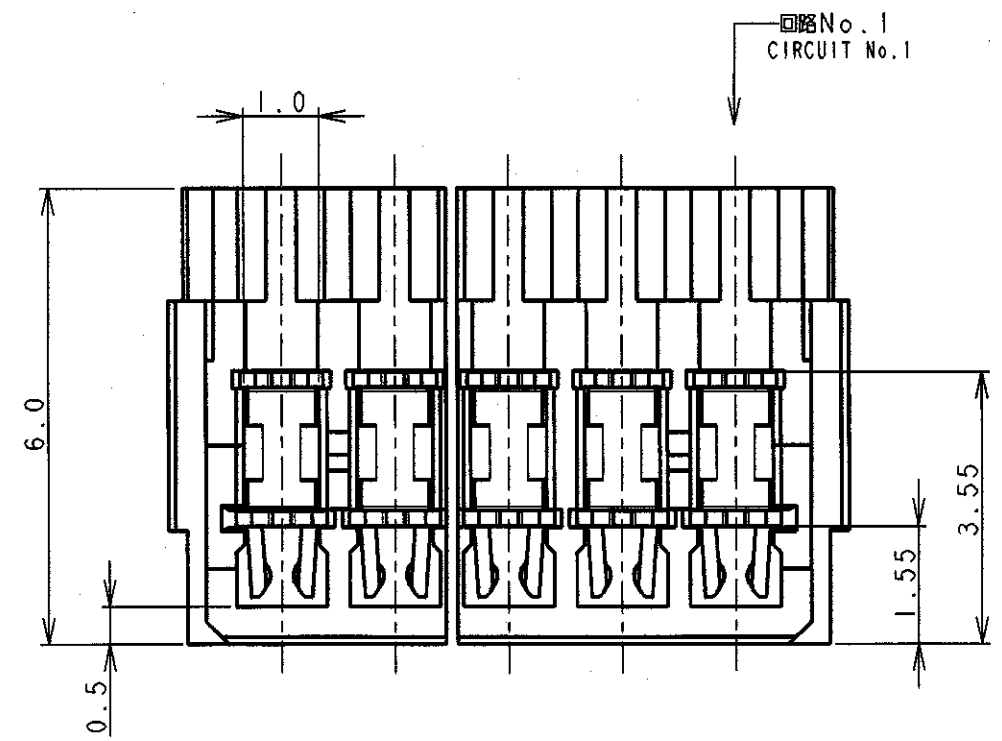

- 注記
1. 適用電線範囲: AWG #26&#28  
被覆外径:  $\phi 0.8\text{mm} \sim \phi 0.95\text{mm}$
  2. 材料: ハウジング-ガラス入りナイロン UL94V-0、色: グレー、青  
コンタクト-錫めっき済み、りん青銅
  3. ハウジング ロック:  
2極は、1箇所 3~20極は、2箇所
  4. ゲート口は左付きと右付きが存在する。(2極品を除く)

- NOTES:
1. APPLICABLE WIRE SIZE: AWG #26&#28  
INSULATION DIA RANGE:  $\phi 0.8\text{mm} \sim \phi 0.95\text{mm}$
  2. MATERIAL:  
HOUSING: NYLON(G.F.) UL94V-0, COLOR: GRAY, BLUE  
CONTACT: PRE-TIN PHOS-BRONZE
  3. HOUSING LOCK:  
2 POSITION - SINGLE LOCK  
3 TO 20 POSITIONS - DOUBLE LOCK
  4. CONNECTOR HAVE THE GATE LEFT SIDE AND RIGHT SIDE. (EXCEPT 2Pos.)

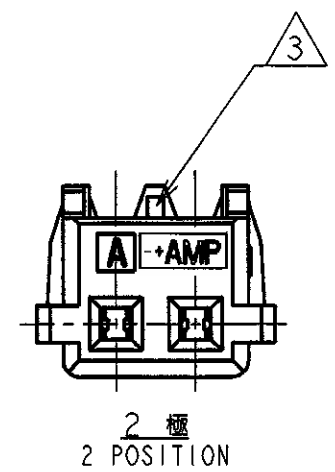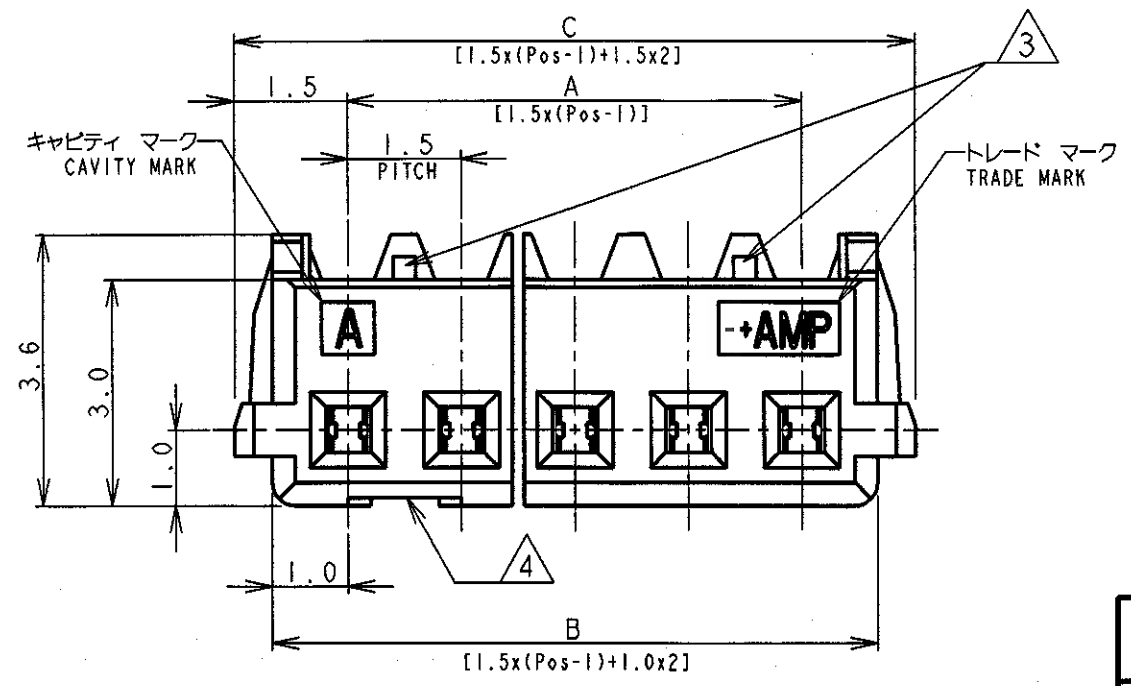

|                                       |  |  |  |   |  |   |  |
|---------------------------------------|--|--|--|---|--|---|--|
| DIMENSIONS:<br>単位: 毫<br>mm            |  | TOLERANCES UNLESS<br>OTHERWISE SPECIFIED |  | WIRE RANGE<br>適合電線断面積<br>0.08mm <sup>2</sup> - 0.14mm <sup>2</sup>                            |  | INSULATION DIA<br>被覆外径<br>$\phi 0.8\text{mm} \sim \phi 0.95\text{mm}$ |  |
| MATERIAL<br>材料<br>SEE NOTE 2<br>注記2参照 |  | FINISH<br>仕上<br>SEE NOTE 2<br>注記2参照      |  | DWN<br>12. JUL '96<br>T. FURUYA   |  | TE Connectivity   |  |
| APVD<br>製品規格<br>108-5525              |  | APPLICATION SPEC<br>取付適用規格<br>114-5223   |  | NAME<br>名称<br>AMP Mini Common Terminated (CT) Connector 1.5mm PITCH<br>MT RECEPTACLE ASSEMBLY |  | DRAWING NO<br>番号<br>A3 00779 C-353293                                 |  |
| CUSTOMER DRAWING                      |  | WEIGHT<br>SEE TABLE 表参照                  |  | SCALE<br>尺度<br>NON  |  | SHEET<br>1 OF 2   |  |
|                                       |  |  |  |   |  | REV<br>E2   |  |

| LOC | DIST | REVISIONS |     |             |      |     |      |
|-----|------|-----------|-----|-------------|------|-----|------|
|     |      | P         | LTR | DESCRIPTION | DATE | DWN | APVD |
|     |      |           |     | SEE SHEET 1 |      |     |      |


|               |               |      |      |      |            |            |
|---------------|---------------|------|------|------|------------|------------|
| 0.97          | 31.5          | 30.5 | 28.5 | 20   | 7-353293-0 | 2-353293-0 |
| 0.92          | 30.0          | 29.0 | 27.0 | 19   | 6-353293-9 | 1-353293-9 |
| 0.87          | 28.5          | 27.5 | 25.5 | 18   | 6-353293-8 | 1-353293-8 |
| 0.83          | 27.0          | 26.0 | 24.0 | 17   | 6-353293-7 | 1-353293-7 |
| 0.78          | 25.5          | 24.5 | 22.5 | 16   | 6-353293-6 | 1-353293-6 |
| 0.73          | 24.0          | 23.0 | 21.0 | 15   | 6-353293-5 | 1-353293-5 |
| 0.68          | 22.5          | 21.5 | 19.5 | 14   | 6-353293-4 | 1-353293-4 |
| 0.64          | 21.0          | 20.0 | 18.0 | 13   | 6-353293-3 | 1-353293-3 |
| 0.59          | 19.5          | 18.5 | 16.5 | 12   | 6-353293-2 | 1-353293-2 |
| 0.54          | 18.0          | 17.0 | 15.0 | 11   | 6-353293-1 | 1-353293-1 |
| 0.49          | 16.5          | 15.5 | 13.5 | 10   | 6-353293-0 | 1-353293-0 |
| 0.45          | 15.0          | 14.0 | 12.0 | 9    | 5-353293-9 | 353293-9   |
| 0.40          | 13.5          | 12.5 | 10.5 | 8    | 5-353293-8 | 353293-8   |
| 0.35          | 12.0          | 11.0 | 9.0  | 7    | 5-353293-7 | 353293-7   |
| 0.30          | 10.5          | 9.5  | 7.5  | 6    | 5-353293-6 | 353293-6   |
| 0.26          | 9.0           | 8.0  | 6.0  | 5    | 5-353293-5 | 353293-5   |
| 0.21          | 7.5           | 6.5  | 4.5  | 4    | 5-353293-4 | 353293-4   |
| 0.16          | 6.0           | 5.0  | 3.0  | 3    | 5-353293-3 | 353293-3   |
| 0.11          | 4.5           | 3.5  | 1.5  | 2    | 5-353293-2 | 353293-2   |
| WEIGHT<br>(g) | C             | B    | A    | Pos. | BLUE       | GRAY       |
|               | 寸法 DIMENSIONS |      |      |      | 製品型番 P/N   |            |


RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

THIS DRAWING IS UNPUBLISHED.

© COPYRIGHT

|  |  |   |                    |  |                    |
|--|--|---|--------------------|--|--------------------|
| DIMENSIONS:<br>単位: ㎜<br>mm   |  | WIRE RANGE<br>適合電線断面積<br>$0.08\text{mm}^2 - 0.14\text{mm}^2$                                  |                    | INSULATION DIA<br>被覆外径<br>$\varnothing 0.8\text{mm} - \varnothing 0.95\text{mm}$                     |                    |
| TOLERANCES UNLESS OTHERWISE SPECIFIED:<br>一般公差<br>$10 \geq$ : $\pm 0.2$<br>$30 \geq$ : $\pm 0.25$<br>$100 \geq$ : $\pm 0.3$<br>ANGLE : $\pm 3^\circ$ |  | DWN T. FURUYA 12. JUL '96<br>CHK J. TANIGAWA 12. JUL '96<br>APVD                              |                    | MATERIAL SEE SHEET 1 OF 2<br>材料   枚目参照   |                    |
| PRODUCT SPEC<br>製品規格<br>108-5525   |  | FINISH<br>仕上<br>SEE SHEET 1 OF 2<br>  枚目参照  |                    |  TE Connectivity |                    |
| APPLICATION SPEC<br>取付運用規格<br>114-5223   |  | NAME<br>名称<br>AMP Mini Common Terminated (CT) Connector 1.5mm PITCH<br>MT RECEPTACLE ASSEMBLY |                    |  |                    |
| WEIGHT<br>SEE TABLE 表参照  |  | SIZE<br>A4  | CAGE CODE<br>00779 | DRAWING NO<br>番号<br>C-353293   | SCALE<br>尺度<br>NON |
| CUSTOMER DRAWING   |  |   |                    | SHEET<br>2 OF 2  | REV<br>E2          |



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[6-353293-1](#)