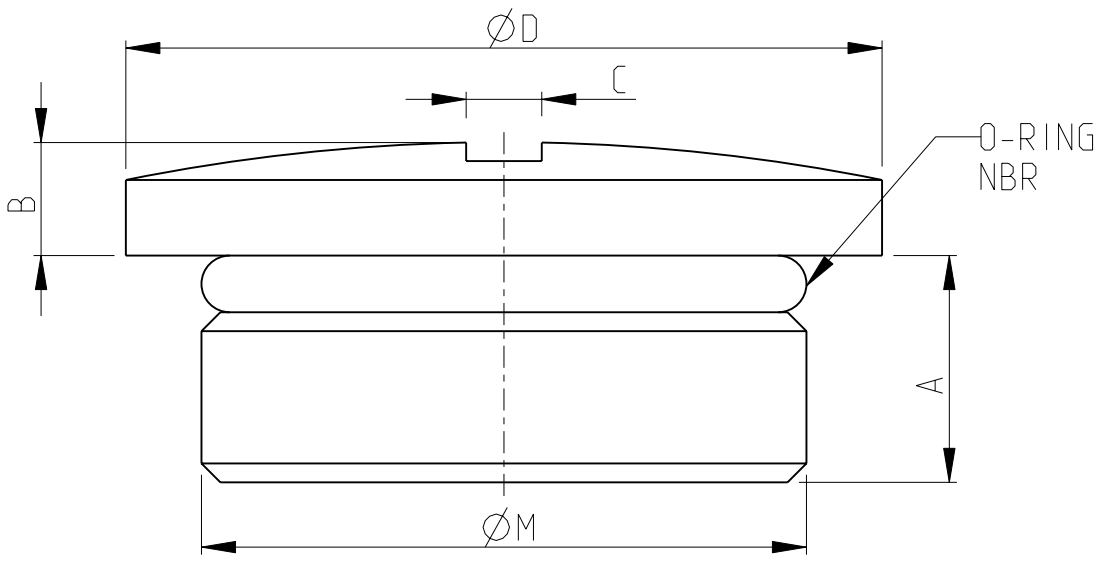
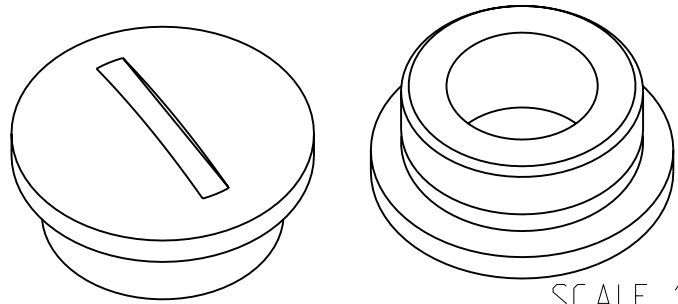


LOC		DIST		REVISIONS																																																												
P	LTR	DESCRIPTION				DATE	DWN	APVD																																																								
	A2	RELEASED AS PER ECR-09-009652				28.APR.2009	GG	TS																																																								
NOTES																																																																
1 PARTS SHALL BE BLANK,SMOOTH,FREE OF BURS AND ALL OTHER FOREIGN MATERIAL																																																																
2 ENCLOSURE: IP68,5bar-30bar MIN																																																																
3 TEMPERATURE RANGE: -20°C TO +100°C																																																																
																																																																
																																																																
SCALE 2:1																																																																
<table border="1"><thead><tr><th>SIZE</th><th>ØM</th><th>ØD</th><th>A</th><th>B</th><th>C</th><th>O-RING</th><th>TORQUE</th></tr></thead><tbody><tr><td>M50x1.5</td><td>50</td><td>55.0</td><td>9.0</td><td>6.0</td><td>2.0</td><td>47.0x2.5</td><td>13.5 Nm</td></tr><tr><td>M40x1.5</td><td>40</td><td>45.0</td><td>8.0</td><td>4.0</td><td>2.0</td><td>37.0x2.0</td><td>13.5 Nm</td></tr><tr><td>M32x1.5</td><td>32</td><td>35.0</td><td>8.0</td><td>4.0</td><td>2.0</td><td>28.0x3.0</td><td>10.0 Nm</td></tr><tr><td>M25x1.5</td><td>25</td><td>28.0</td><td>7.0</td><td>4.0</td><td>2.0</td><td>21.0x1.5</td><td>7.0 Nm</td></tr><tr><td>M20x1.5</td><td>20</td><td>24.0</td><td>6.5</td><td>3.0</td><td>2.0</td><td>18.0x1.5</td><td>5.0 Nm</td></tr><tr><td>M16x1.5</td><td>16</td><td>20.0</td><td>6.0</td><td>3.0</td><td>2.0</td><td>13.0x1.5</td><td>4.0 Nm</td></tr></tbody></table>									SIZE	ØM	ØD	A	B	C	O-RING	TORQUE	M50x1.5	50	55.0	9.0	6.0	2.0	47.0x2.5	13.5 Nm	M40x1.5	40	45.0	8.0	4.0	2.0	37.0x2.0	13.5 Nm	M32x1.5	32	35.0	8.0	4.0	2.0	28.0x3.0	10.0 Nm	M25x1.5	25	28.0	7.0	4.0	2.0	21.0x1.5	7.0 Nm	M20x1.5	20	24.0	6.5	3.0	2.0	18.0x1.5	5.0 Nm	M16x1.5	16	20.0	6.0	3.0	2.0	13.0x1.5	4.0 Nm
SIZE	ØM	ØD	A	B	C	O-RING	TORQUE																																																									
M50x1.5	50	55.0	9.0	6.0	2.0	47.0x2.5	13.5 Nm																																																									
M40x1.5	40	45.0	8.0	4.0	2.0	37.0x2.0	13.5 Nm																																																									
M32x1.5	32	35.0	8.0	4.0	2.0	28.0x3.0	10.0 Nm																																																									
M25x1.5	25	28.0	7.0	4.0	2.0	21.0x1.5	7.0 Nm																																																									
M20x1.5	20	24.0	6.5	3.0	2.0	18.0x1.5	5.0 Nm																																																									
M16x1.5	16	20.0	6.0	3.0	2.0	13.0x1.5	4.0 Nm																																																									
DIMENSIONS																																																																
DIMENSIONS:		DWN 11.04.2002		MATERIAL		FINISH																																																										
mm		SCHNEIDER		-		-																																																										
TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK 11.04.2002		 Tyco Electronics Tyco Electronics, AMP.GmbH 53757 Sankt Augustin, Germany																																																												
n.ISO 8015: n.ISO 2768-mH-E: n.DIN 16901-120		APVD -																																																														
0 PLC 1 PLC 2 PLC 3 PLC 4 PLC ANGLES		PRODUCT SPEC -		NAME BLANKING PIECE WITH SEALING,METRIC																																																												
		APPLICATION SPEC -		SIZE A 4																																																												
		WEIGHT -		CAGE CODE 00779																																																												
		DRAWING NO C-1102773					RESTRICTED TO -																																																									
CUSTOMER DRAWING				SCALE 5:1		SHEET 1 OF 1		REV A2																																																								

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-1102773-0](#)