


- NOTES:
- 1. MATERIALS AND FINISHES
 - BODY – BRASS, NICKEL PLATING
 - CONTACT – BRASS, GOLD PLATING
 - INSULATOR – DELRIN, NATURAL
 - 2. ELECTRICAL:
 - A. IMPEDANCE: 50 OHM
 - C. FREQUENCY RANGE: DC TO 4 GHz
 - C. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, MIN.
 - 3. MECHANICAL:
 - A. DURABILITY: 500 CYCLES MIN.
 - B. TEMPERATURE RANGE: – 40°C to +85°C

THIRD ANGLE PROJ.



REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
A	RELEASE TO MFG.	03-May-91	38063	DR
D1	KJ-B2071A2-ND3G-50 WAS KJ-B2071A2-50	24-Feb-00		
E	STAMP FOR SHELL WAS CHANGED	11-Jun-08		SH
F	SPRING WAS CHANGED	11-Jul-12	47967	SH

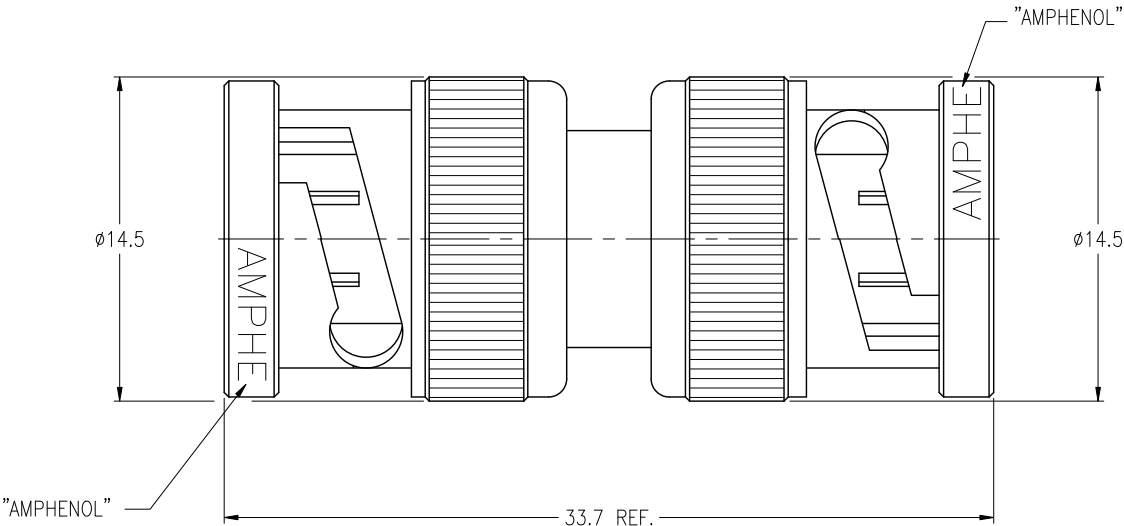

CUSTOMER OUTLINE DRAWING
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:
<0.5mm ±0.05mm 0.5 – 6mm ±0.1mm 6 – 30mm ±0.2mm 30 – 120mm ± 0.3mm ANGLES ±1°

NOTICE – These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

MATERIAL	DRAWN T.DENG ENGINEER T.AUBIN APPROVED S.HSIEH CAD FILE F:\DWG\APL\CNPD\RFX\31\218\ND3G-FSZ	DATE 11-Jul-12 DATE 03-Aug-00 DATE 11-Jul-12	TITLE BNC MALE TO BNC MALE ADAPTOR	Amphenol RF Danbury CT USA, Tainan Taiwan, Shenzhen China www.amphenolrf.com
REFERENCE			SCALE: 3/1 SHEET 2 OF 2	DRAWING NO. 31-218-ND3G-50
FINISH			DWG SIZE B REV F	ITEM NO. 31-218-ND3G-50
				PART NO. 31-218-RFX

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[031-218-RFX](#)