

ALUMINUM ELECTROLYTIC CAPACITORS

UCX Chip Type, High Reliability Low temperature ESR specification



- Chip type, high temperature range, for +135°C use.
- Added ESR specification after the test at -40°C.
- Applicable to automatic mounting machine fed with carrier tape.
- Compliant to the RoHS directive (2011/65/EU).
- AEC-Q200 compliant. Please contact us for details.




Specifications


Item	Performance Characteristics						
Category Temperature Range	-40 to +135°C						
Rated Voltage Range	10 to 50V						
Rated Capacitance Range	47 to 3300μF						
Capacitance Tolerance	±20% at 120Hz, 20°C						
Leakage Current	After 2 minutes' application of rated voltage at 20°C, leakage current is not more than 0.01CV or 3(μA), whichever is greater.						
Tangent of loss angle (tan δ)	Rated voltage (V)	10	16	25	35	50	Measurement frequency : 120Hz at 20°C
	tan δ (MAX.)	0.30	0.23	0.18	0.16	0.16	
Stability at Low Temperature	Rated voltage (V)	10	16	25	35	50	Measurement frequency : 120Hz
	Impedance ratio ZT / Z20 (MAX.)	Z-40°C / Z+20°C	12	8	6	4	
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 2000 hours at 135°C.						
	Capacitance Change	Within ± 30% of the initial capacitance value					
	tan δ	300% or less than the initial specified value					
Shelf Life	After storing the capacitors under no load at 135°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.						
	Capacitance Change	Within ±10% of the initial capacitance value					
	tan δ	Less than or equal to the initial specified value					
Resistance to soldering heat	The capacitors shall be kept on the hot plate for 30 seconds, which is maintained at 250°C. The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C.						
	Capacitance Change	Within ±10% of the initial capacitance value					
	Leakage current	Less than or equal to the initial specified value					
Marking	Black print on the case top.						

Chip Type


(φ6.3) [Vibration Resistance]

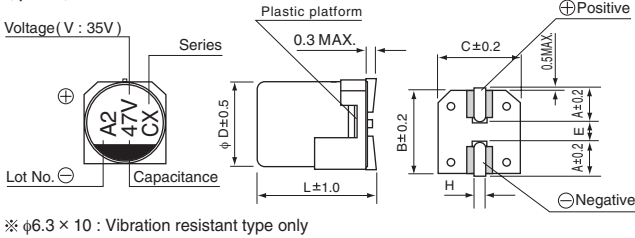


(φ8, φ10) [Standard]

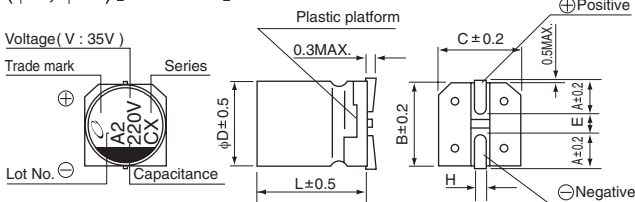


(φ12.5 to φ18) [Standard]

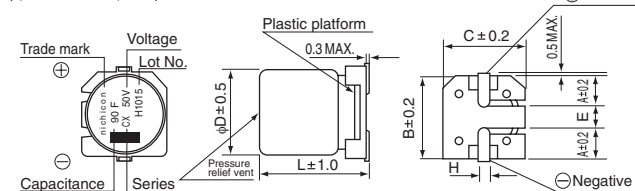


Type numbering system (Example : 35V 47μF)

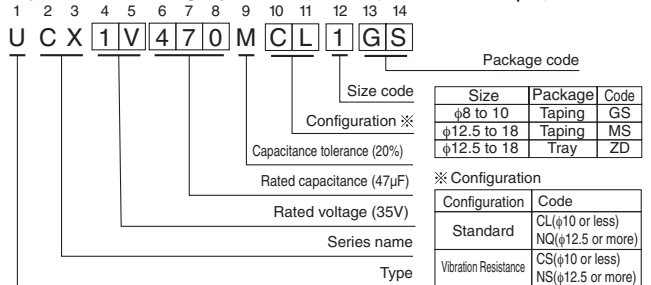

(φ8, φ10) [Vibration Resistance]

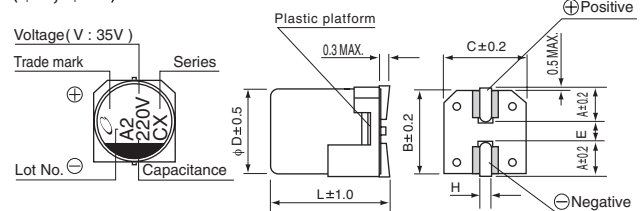

(φ12.5 to φ18) [Vibration Resistance]

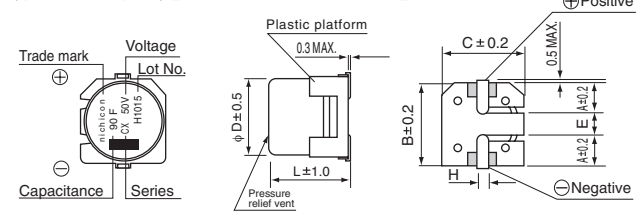

Standard

	(mm)				
φD×L	8×10	10×10	12.5×13.5	16×16.5, 21.5	18×16.5, 21.5
A	2.9	3.2	4.8	5.4	6.4
B	8.3	10.3	13.6	17.1	19.1
C	8.3	10.3	13.6	17.1	19.1
E	3.1	4.5	4	6.3	6.3
L	10	10	13.5	16.5, 21.5	16.5, 21.5
H	0.8 to 1.1	0.8 to 1.1	1.0 to 1.4	1.0 to 1.4	1.0 to 1.4

Vibration Resistance

	(mm)					
φD×L	6.3×10	8×10	10×10	12.5×13.5	16×16.5, 21.5	18×16.5, 21.5
A	2.4	2.9	3.2	4.8	5.4	6.4
B	6.6	8.3	10.3	13.6	17.1	19.1
C	6.6	8.3	10.3	13.6	17.1	19.1
E	2.2	3.1	4.5	4	6.3	6.3
L	10	10	10	13.5	16.5, 21.5	16.5, 21.5
H	0.5 to 0.8	1.1 to 1.5	1.1 to 1.5	1.0 to 1.4	1.0 to 1.4	1.0 to 1.4

■ Aid electrode

Voltage

V	10	16	25	35	50
Code	A	C	E	V	H

● Dimension table in next page.

UCX

■ Dimensions

Cap.(μF)	V Code	10				16				25				35				50			
		1A				1C				1E				1V				1H			
47	470													6.3 X 10 0.25 4 15 197 8 X 10 0.20 3 12 270	8 X 10 0.25 3.5 15 270						
68	680													8 X 10 0.20 3 12 270							
100	101					6.3 X 10 0.25 4 15 197 8 X 10 0.20 3 12 270				8 X 10 0.20 3 12 270				6.3 X 10 0.25 4 15 197 8 X 10 0.20 3 12 270	10 X 10 0.2 2.5 12 500						
220	221	8 X 10 0.20 3 12 270				8 X 10 0.20 3 12 270				10 X 10 0.15 2 10 500				10 X 10 0.15 2 10 500							
330	331	8 X 10 0.20 3 12 270 10 X 10 0.15 2 10 500				10 X 10 0.15 2 10 500				10 X 10 0.15 2 10 500											
390	391														12.5 X 13.5 0.09 1.3 6.5 750						
470	471	10 X 10 0.15 2 10 500				10 X 10 0.15 2 10 500								12.5 X 13.5 0.07 1.0 5.0 750	16 X 16.5 0.07 0.70 3.5 1000						
560	561													12.5 X 13.5 0.07 1.0 5.0 750	16 X 16.5 0.07 0.70 3.5 1000						
680	681													12.5 X 13.5 0.07 1.0 5.0 750	18 X 16.5 0.07 0.70 3.5 1200						
820	821									12.5 X 13.5 0.07 1.0 5.0 750			16 X 16.5 0.05 0.50 2.5 1200	18 X 16.5 0.07 0.70 3.5 1200							
1000	102									12.5 X 13.5 0.07 1.0 5.0 750			16 X 16.5 0.05 0.50 2.5 1200	16 X 21.5 0.05 0.40 2.0 1600							
1200	122									16 X 16.5 0.05 0.50 2.5 1200			18 X 16.5 0.05 0.50 2.5 1400	18 X 21.5 0.04 0.32 1.6 1900							
1500	152									16 X 16.5 0.05 0.50 2.5 1200			16 X 21.5 0.04 0.32 1.6 1900 18 X 16.5 0.05 0.50 2.5 1400								
1800	182									16 X 16.5 0.05 0.50 2.5 1200			18 X 21.5 0.035 0.28 1.4 2200								
2200	222									18 X 16.5 0.05 0.50 2.5 1400			18 X 21.5 0.035 0.28 1.4 2200								
2700	272									16 X 21.5 0.04 0.32 1.6 1900											
3300	332									18 X 21.5 0.035 0.28 1.4 2200											

MAX. ESR (Ω) at 20°C / -40°C 100kHz, Rated ripple current(mArms) at 135°C 100kHz

● In this case, [6] will be put at 12th digit of type numbering system.

● Frequency coefficient of rated ripple current

Frequency	50Hz	120Hz	300Hz	1kHz	10kHz or more
Coefficient	0.35	0.50	0.64	0.83	1.00

- Taping specifications are given in page 23.
- Recommended land size, soldering by reflow are given in page 18, 19.
- Please refer to page 3 for the minimum order quantity.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Nichicon:

[UCW1V470MCL1GS](#) [UCX1V470MCL1GS](#) [UCX1C101MCS6GS](#) [UCX1E221MCL1GS](#) [UCX1V101MCL1GS](#)
[UCX1E101MCL1GS](#) [UCX1A471MCL1GS](#) [UCX1A331MCL6GS](#) [UCX1V680MCL1GS](#) [UCX1A221MCL1GS](#)
[UCX1A331MCL1GS](#) [UCX1E331MCL1GS](#) [UCX1V221MCL1GS](#) [UCX1V470MCS6GS](#) [UCX1C471MCL1GS](#)
[UCX1C221MCL1GS](#) [UCX1C331MCL1GS](#) [UCX1C101MCL1GS](#) [UCX1V101MCS6GS](#) [UCX1E821MNQ1GS](#)
[UCX1H101MCL1GS](#) [UCX1H101MCS1GS](#) [UCX1H122MNQ1GS](#) [UCX1H391MNQ1GS](#) [UCX1H391MNS1GS](#)
[UCX1V152MNS6GS](#) [UCX1V222MNS1GS](#) [UCX1V471MNQ1GS](#) [UCX1V561MNS1GS](#) [UCX1H681MNS1GS](#)
[UCX1V102MNS1GS](#) [UCX1V122MNQ1GS](#) [UCX1V122MNS1GS](#) [UCX1V152MNQ6GS](#) [UCX1V152MNS1GS](#)
[UCX1E332MNQ1GS](#) [UCX1E821MNS1GS](#) [UCX1H102MNQ1GS](#) [UCX1H102MNS1GS](#) [UCX1H122MNS1GS](#)
[UCX1H470MCS1GS](#) [UCX1E332MNS1GS](#) [UCX1E102MNQ1GS](#) [UCX1E102MNS1GS](#) [UCX1V821MNQ1GS](#)
[UCX1V821MNS1GS](#) [UCX1E152MNS1GS](#) [UCX1E182MNQ1GS](#) [UCX1E182MNS1GS](#) [UCX1E222MNQ1GS](#)
[UCX1E222MNS1GS](#) [UCX1E272MNQ1GS](#) [UCX1E272MNS1GS](#) [UCX1E122MNS1GS](#) [UCX1E152MNQ1GS](#)
[UCX1V222MNQ1GS](#) [UCX1V471MNS1GS](#) [UCX1V561MNQ1GS](#) [UCX1V681MNQ1GS](#) [UCX1V681MNS1GS](#)
[UCX1H821MNQ1GS](#) [UCX1H821MNS1GS](#) [UCX1V102MNQ1GS](#) [UCX1V152MNQ1GS](#) [UCX1V182MNQ1GS](#)
[UCX1V182MNS1GS](#) [UCX1H470MCL1GS](#) [UCX1H471MNQ1GS](#) [UCX1H471MNS1GS](#) [UCX1H561MNQ1GS](#)
[UCX1H561MNS1GS](#) [UCX1H681MNQ1GS](#) [UCX1H681MNS1MS](#) [UCX1H391MNQ1MS](#) [UCX1H102MNS1MS](#)
[UCX1V222MNS1MS](#) [UCX1V152MNS1MS](#) [UCX1H561MNQ1MS](#) [UCX1H471MNS1MS](#) [UCX1E272MNS1MS](#)
[UCX1H471MNQ1MS](#) [UCX1H561MNS1MS](#) [UCX1V182MNS1MS](#) [UCX1H391MNS1MS](#) [UCX1H821MNQ1MS](#)
[UCX1E332MNQ1MS](#) [UCX1V222MNQ1MS](#) [UCX1E332MNS1MS](#) [UCX1H821MNS1MS](#) [UCX1H122MNQ1MS](#)
[UCX1H681MNQ1MS](#) [UCX1H102MNQ1MS](#) [UCX1E272MNQ1MS](#) [UCX1H122MNS1MS](#) [UCX1V182MNQ1MS](#)
[UCX1E122MNS1ZD](#) [UCX1H561MNS1ZD](#) [UCX1H122MNS1ZD](#) [UCX1E102MNS1ZD](#) [UCX1E152MNS1ZD](#)