
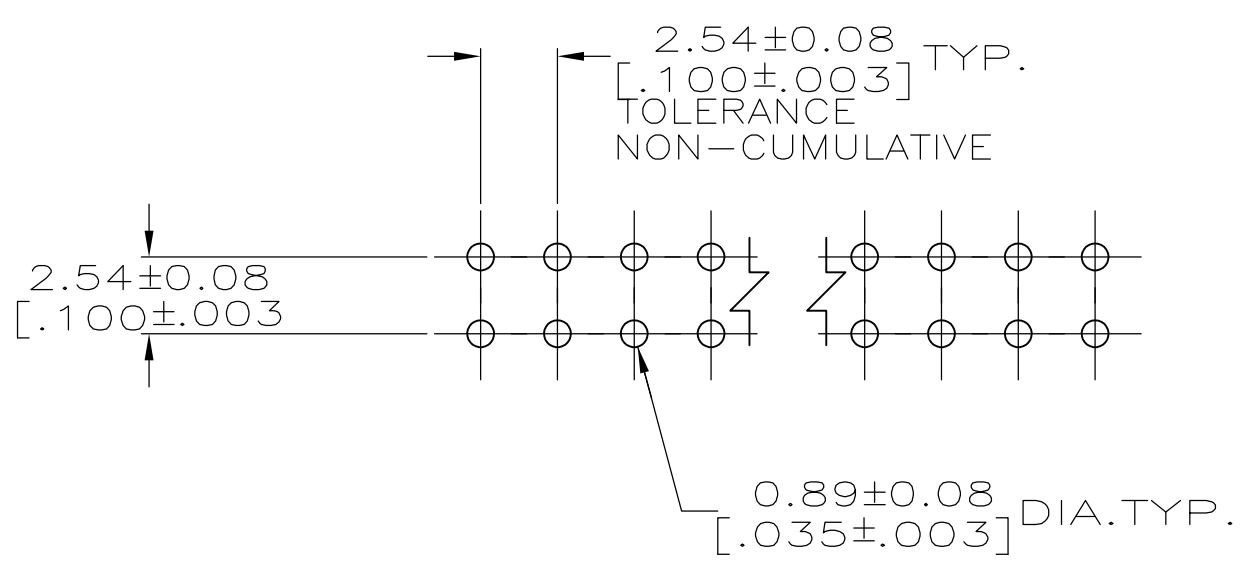
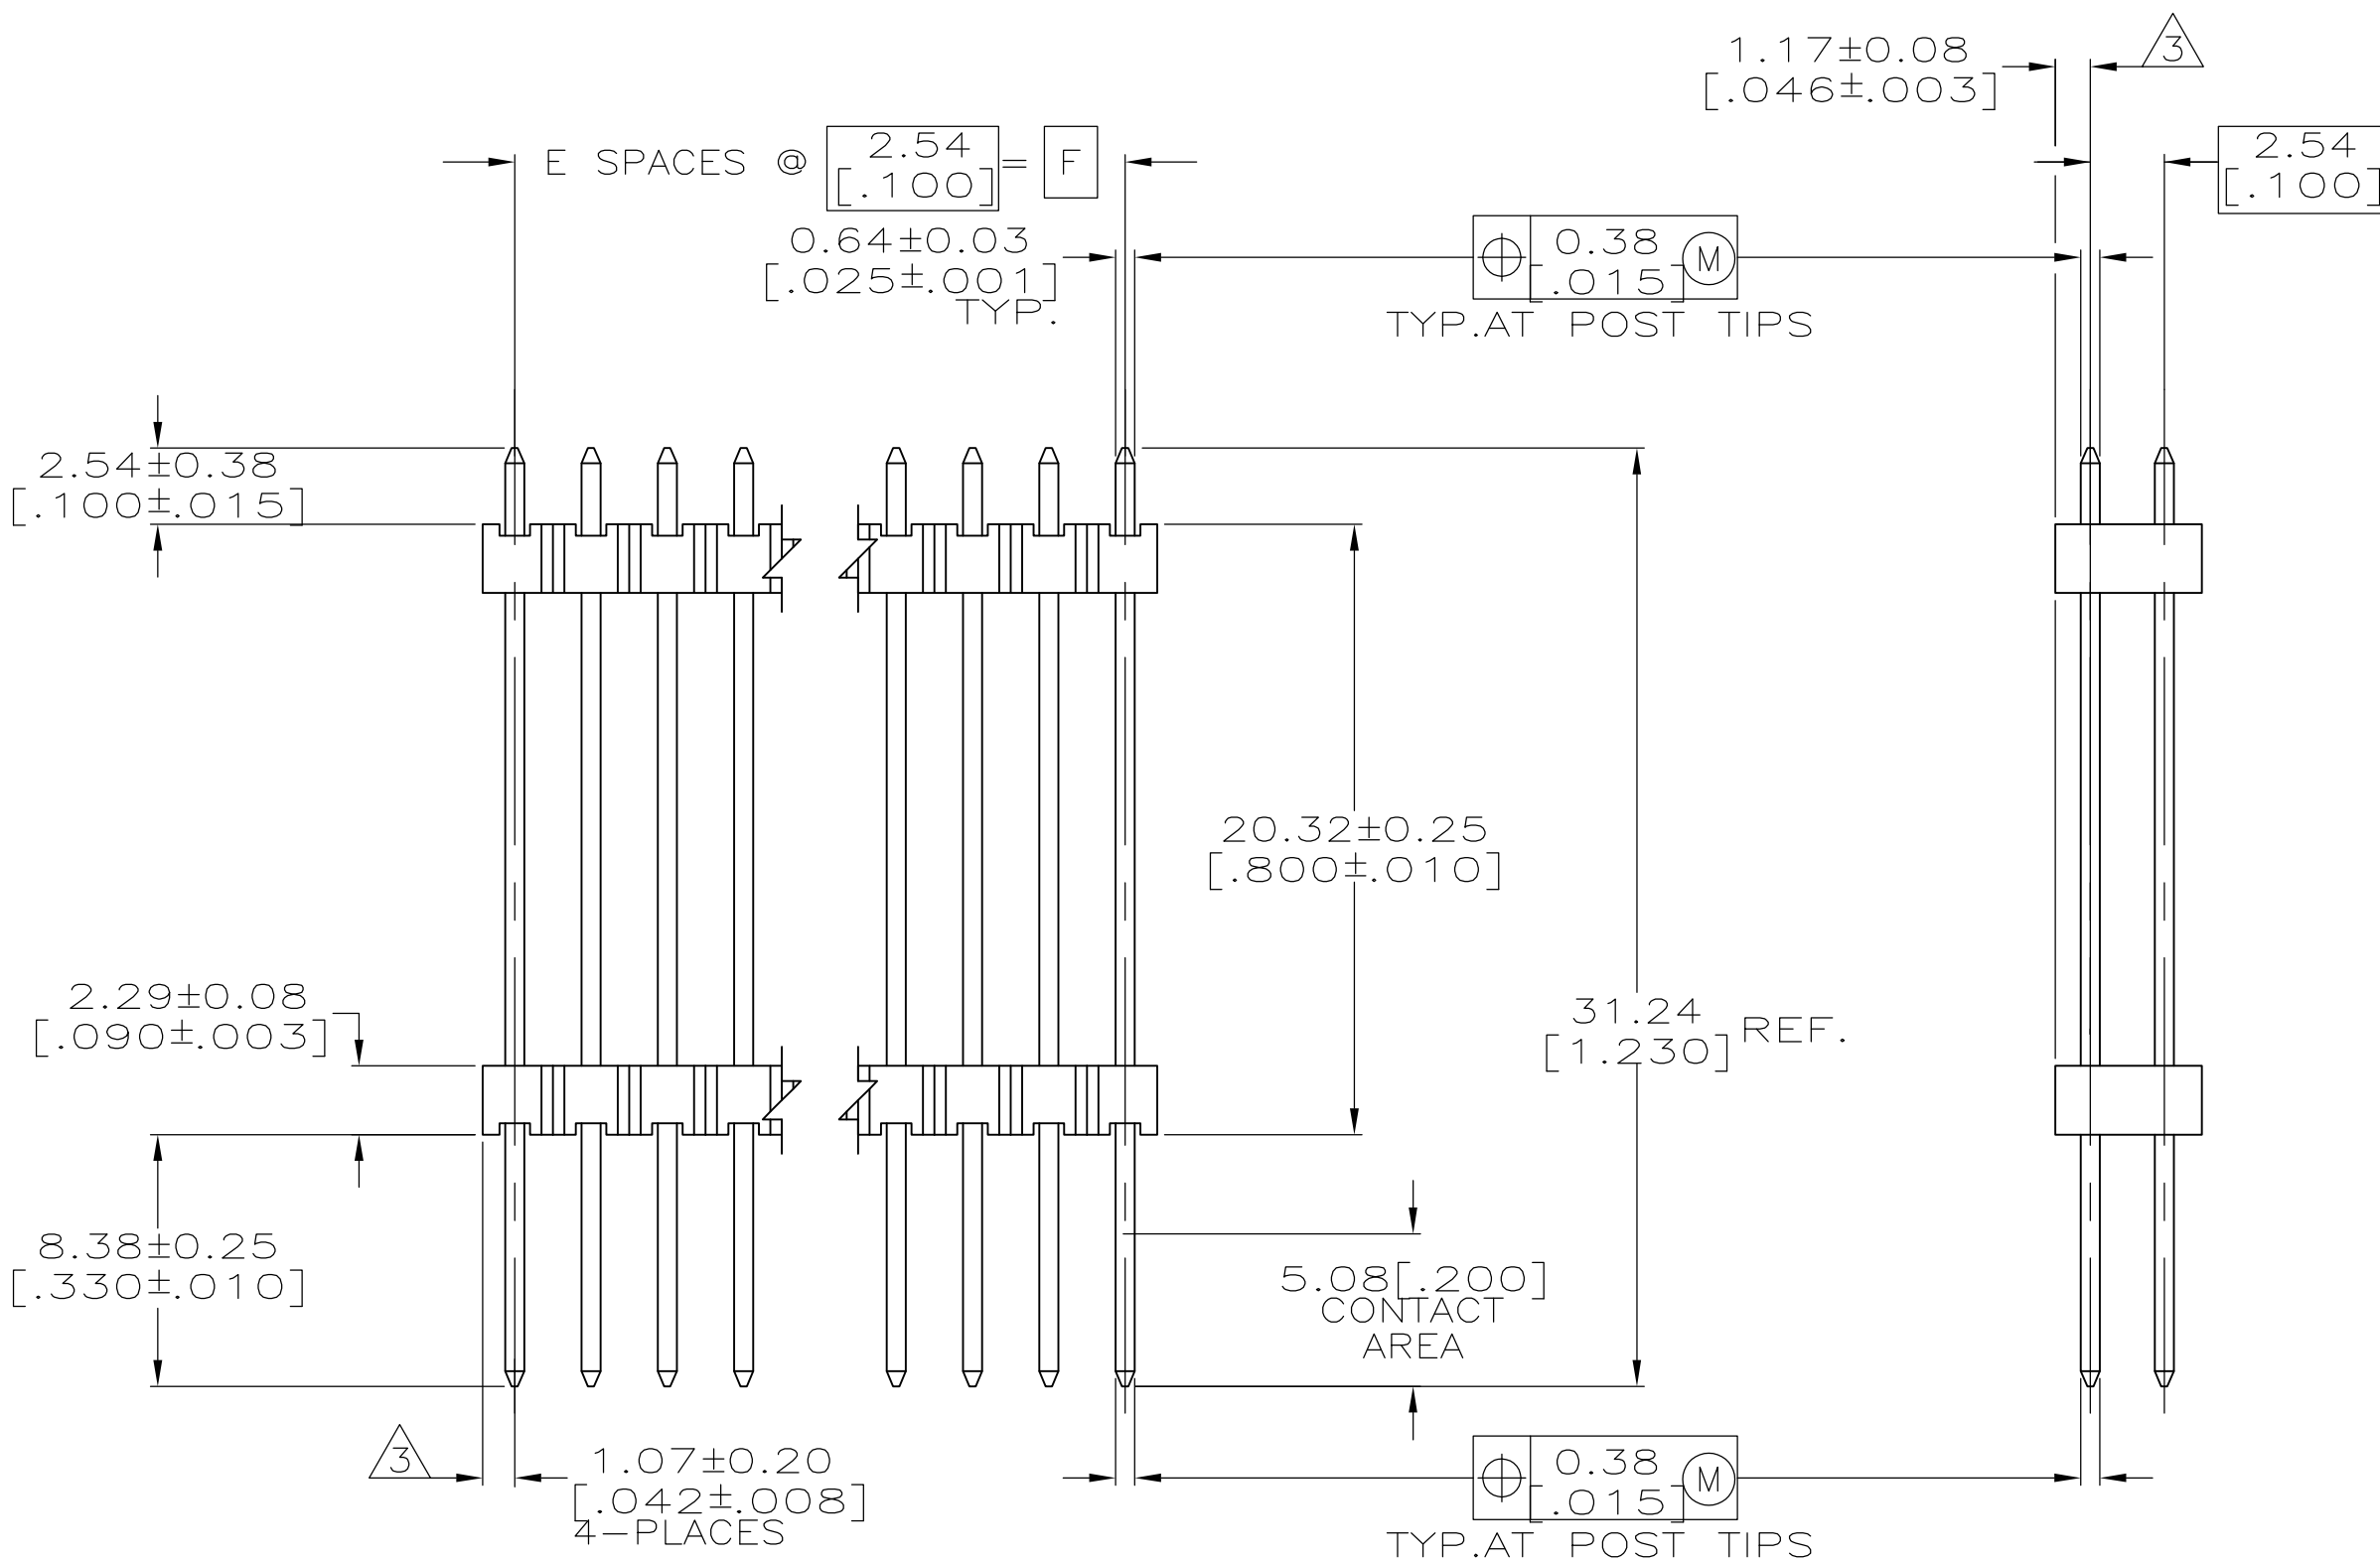


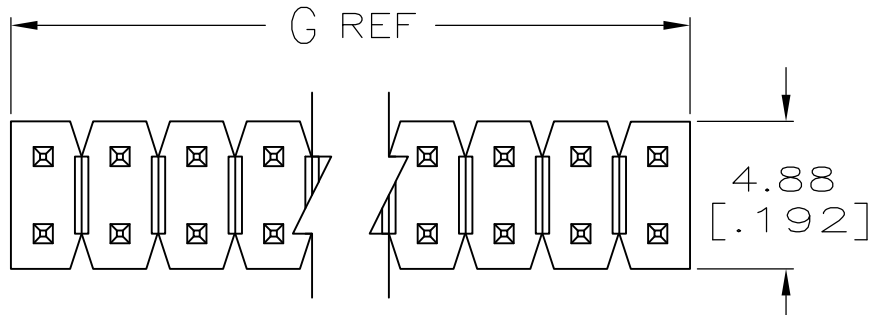

RECOMMENDED HOLE LAYOUT

- ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
- FINISH: 0.000381 [.000015] GOLD ON CONTACT AREA, 0.00254-0.00508 [.000100-.000200] MATTE TIN-LEAD ON SOLDER TAIL, 0.00127 [.000050] NICKEL ENTIRE POST.
- FINISH: 0.000381 [.000015] GOLD ON CONTACT AREA, 0.00254-0.00508 [.000100-.000200] MATTE TIN ON SOLDER TAIL, 0.00127 [.000050] NICKEL ENTIRE POST.

SEE SHEET 2 FOR PART NUMBER TABLES

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
R BROWN

CHK
J GESFORD

APVD
J GESFORD

02MAR2006

02MAR2006

02MAR2006

TE Connectivity

NAME

HEADER ASSEMBLY, MOD II,
STACKING, DOUBLE ROW,
.025 SQ.POST, UNSHROUDED

DIMENSIONS:
mm [INCHES]

0 PLC ± -

1 PLC ± -

2 PLC ± 0.51[.02]

3 PLC ± 0.127[.005]

4 PLC ± 0.0127[.0005]

ANGLES ±

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

SEE TABLE

MATERIAL

4

FINISH

SEE TABLE

DWN
R BROWN

CHK
J GESFORD

APVD
J GESFORD

02MAR2006

02MAR2006

02MAR2006

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

—

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A1

00779

146503

—

CUSTOMER DRAWING

SCALE 4:1

SHEET 1 OF 2

REV A1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-146503-6](#)