MHDTZK Series

Diecast Hood & D-Sub Connector Kit | Machined



Description

- Stamped & Formed D-Sub contacts, selective Gold plated contacts, Tin plated solder buckets
- · Strong Nickel plated, diecast, Zinc hood
- Straight cable entry
- Will accommodate 4.0mm to 13.0mm diameter cable
- Compression cable clamp inserts for 4, 5, 7 and 9mm diameter cable
- Compression inserts can be mixed to obtain maximum cable retention
- 4-40 UNC plastic capped jackscrews

Specification


| D-Sub | |
|-----------------------|---|
| Voltage Rating | 250V |
| Current Rating | 5 Amps |
| Contact Resistance | 25mΩ Max |
| Insulation Resistance | 1000ΜΩ |
| Operating Temperature | -55°C to 105°C |
| Shell | Tin plated Steel |
| Insulator Material | Glass filled Polyester |
| Contact Material | Copper alloy |
| Contact Plating | Selective Gold over Nickel, solder bucket: Tin plated |







| Hood | |
|------------------|---------------------|
| No. Contacts | 9, 15 & 25 |
| Kit Type | D-Sub connector kit |
| Housing Material | Nickel plated Zinc |
| Cable Entry | Straight |
| Cable OD | Up to 13.0mm |

| The Kit Contains | | | | |
|-------------------------|-----|--|--|--|
| Backshell Halves | x 2 | | | |
| D-Sub connector | x 1 | | | |
| Housing screws | x 2 | | | |
| 4-40 UNC Plastic capped | x 2 | | | |
| jackscrews | | | | |
| Compression inserts | x 1 | | | |





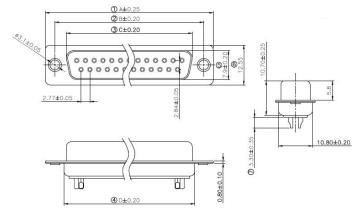

| Hood Dimensions | | | | | |
|-----------------|---------|---------|---------|---------|--|
| Size | Α | В | С | D | |
| 00 | 31.20mm | 24.99mm | 39.90mm | 15.00mm | |
| 09 | 1.228" | 0.984" | 1.571" | 0.591" | |
| 4.5 | 39.50mm | 33.32mm | 41.50mm | 15.00mm | |
| 15 | 1.555" | 1.312" | 1.634" | 0.591" | |
| 0.5 | 53.40mm | 47.04mm | 48.60mm | 15.00mm | |
| 25 | 2.102" | 1.852" | 1.913" | 0.591" | |

| Male Dimensions | | | | | | |
|-----------------|---------|---------|---------|--|--|--|
| | 09 | 15 | 25 | | | |
| Α | 30.81mm | 39.25mm | 53.03mm | | | |
| В | 24.99mm | 33.32mm | 38.96mm | | | |
| С | 19.28mm | 27.75mm | 41.30mm | | | |
| D 19.23mm | | 27.56mm | 41.30mm | | | |

| Female Dimensions | | | | | | |
|-------------------|---------|---------|---------|--|--|--|
| | 09 | 15 | 25 | | | |
| Α | 30.88mm | 39.20mm | 53.02mm | | | |
| В | 24.88mm | 33.30mm | 47.04mm | | | |
| С | 19.28mm | 27.75mm | 41.30mm | | | |
| D | 18.94mm | 27.50mm | 41.20mm | | | |

| Part No. | Norcomp Part No. | Positions | Male/Female | Contact Type | Hood Part No. | Norcomp Part No. | D-Sub Part No. | Norcomp Part No. |
|------------------|------------------|-----------|-------------|---------------------|---------------|------------------|----------------|------------------|
| MHDTZK9-DB9P-K | 999-009-E30S102 | 9 Pin | Male | Stamped & Formed | MHDTZK-9-K | 970-009-030R121 | MHDB9SP | 171-009-102L001 |
| MHDTZK15-DB15P-K | 999-015-E30S102 | 15 Pin | Male | Stamped & Formed | MHDTZK-15-K | 970-015-030R121 | MHDB15SP | 171-015-102L001 |
| MHDTZK25-DB25P-K | 999-025-E30S102 | 25 Pin | Male | Stamped & Formed | MHDTZK-25-K | 970-025-030R121 | MHDB25SP | 171-025-102L001 |
| MHDTZK9-DB9S-K | 999-009-E30S202 | 9 Pin | Female | Stamped & Formed | MHDTZK-9-K | 970-009-030R121 | MHDB9SS | 171-009-202L001 |
| MHDTZK15-DB15S-K | 999-015-E30S202 | 15 Pin | Female | Stamped & Formed | MHDTZK-15-K | 970-015-030R121 | MHDB15SS | 171-015-202L001 |
| MHDTZK25-DB25S-K | 999-025-E30S202 | 25 Pin | Female | Stamped & Formed | MHDTZK-25-K | 970-025-030R121 | MHDB25SS | 171-025-202L001 |





Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

NorComp:

MHDTZK25-DB25S-K MHDTZK25-DB25P-K MHDTZK15-DB15S-K MHDTZK9-DB9P-K MHDTZK15-DB15P-K MHDTZK9-DB9S-K