
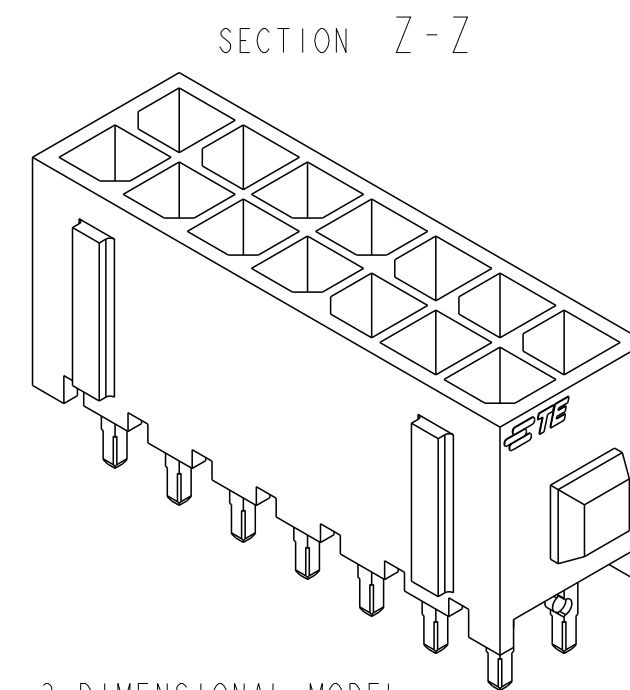


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	EI	REVISED PER ECR-16-011494	21JUN2017	NK	CX

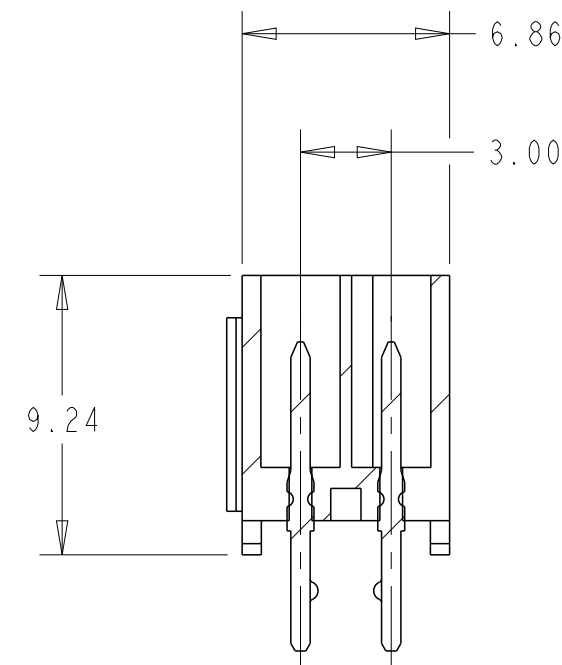

4 MATERIAL: HOUSING - NYLON, UL 94V-0, BLACK.
CONTACT - BRASS.
0.000762 MINIMUM GOLD OVER 0.00254
MINIMUM NICKEL ON MATING AREA. 0.00254
MATTE TIN MINIMUM OVER 0.00254 NICKEL
MINIMUM ON SOLDER TAILS.


 $\varnothing 1.02^{+0.02}_0$

2.0 M

TYPE

RECOMMENDED MOUNTING HOLE PATTERN

SCALE 5:1

 3

	40.00	33.00	36.86	24	5-794632-4
	37.00	30.00	33.86	22	5-794632-2
	34.00	27.00	30.86	20	5-794632-0
	31.00	24.00	27.86	18	4-794632-8
	28.00	21.00	24.86	16	4-794632-6
	25.00	18.00	21.86	14	4-794632-4
	22.00	15.00	18.86	12	4-794632-2
	19.00	12.00	15.86	10	4-794632-0
	16.00	9.00	12.86	8	3-794632-8
	13.00	6.00	9.86	6	3-794632-6
	10.00	3.00	6.86	4	3-794632-4
	7.00	-	3.86	2	3-794632-2
	40.00	33.00	36.86	24	2-794632-4
	37.00	30.00	33.86	22	2-794632-2
	34.00	27.00	30.86	20	2-794632-0
	31.00	24.00	27.86	18	1-794632-8
	28.00	21.00	24.86	16	1-794632-6
	25.00	18.00	21.86	14	1-794632-4
	22.00	15.00	18.86	12	1-794632-2
	19.00	12.00	15.86	10	1-794632-0
	16.00	9.00	12.86	8	794632-8
	13.00	6.00	9.86	6	794632-6
	10.00	3.00	6.86	4	794632-4
	7.00	-	3.86	2	794632-2
FINISH	DIM Y	DIM Z	DIM X	NO. OF POSN.	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. HAYMAKER	16AUG99	 TE Connectivity							
DIMENSIONS: mm [INCHES]		CHK K. COBLE	16AUG99	NAME VERTICAL HEADER ASSEMBLY, THRU HOLE, 30 GOLD, DUAL ROW, MICRO MATE-N-LOK™							
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD K. COBLE	16AUG99								
		PRODUCT SPEC									
		APPLICATION SPEC									
0 PLC ±. 1 PLC ±. 2 PLC ±0.20 [.008] 3 PLC ±. 4 PLC ±. ANGLES ±.		-		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO				
MATERIAL SEE TABLE		FINISH SEE TABLE		WEIGHT -		A2 00779 C-794632					
CUSTOMER DRAWING						SCALE	4:1	SHEET	OF	REV	F

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[794632-8](#)