

REV. 1


DCO 15768

COIL: @ 25°C	
RESISTANCE	310 OHMS ±10%
NOMINAL VOLTAGE	12.0 VDC
MUST OPERATE	5.6 VDC
MUST RELEASE	0.55 VDC

ENVIRONMENT:	
VIBRATION	10 CPS TO 2500 CPS @ 20 g's
SHOCK	50 g's 11 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES: OPERATE 6 MS MAX.
 RELEASE 5 MS MAX.
 CONTACT BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

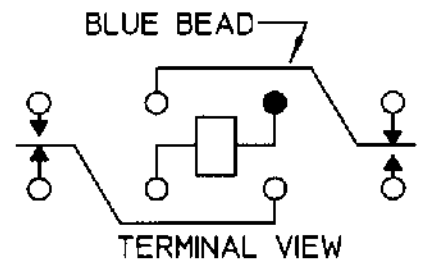

CONTACT RATING: LOW LEVEL TO 2A
 28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 4/20/93 CK. GQH 8/9/99



HMS1230S003

CUST. C. I. I. STD.
 CUST. NO. REV.

'HMS' RELAY

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[HMS1230S003](#)