



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Au100%	Yes	Yes

more than you expect



ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	2-4 @20°C	6.0 mOhms max.
D.C. RESISTANCE	3-5 @20°C	6.0 mOhms max.
D.C. RESISTANCE	8-10 @20°C	3.0 mOhms max.
INDUCTANCE	2-5 tie(3+4), 100kHz, 100mVAC, Ls	410.0uH min.
LEAKAGE INDUCTANCE	2-5 tie(3+4, 8+10), 100kHz, 100mVAC, Ls	800nH max.
DIELECTRIC	2-8 tie(3+4), 2250VDC, 1 second	-
URNS RATIO	(2-4):(8-10)	1.667:1, ±1%
URNS RATIO	(3-5):(8-10)	1.667:1, ±1%

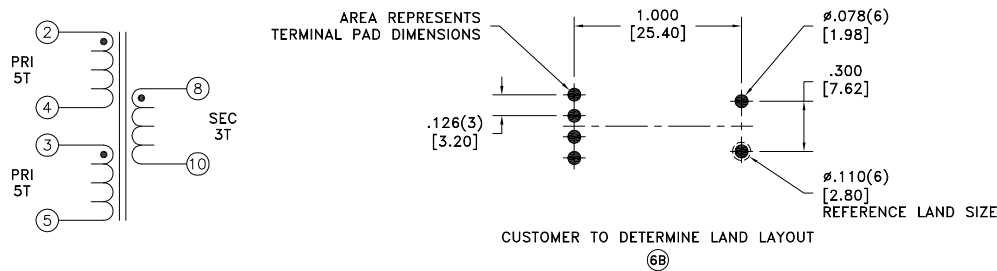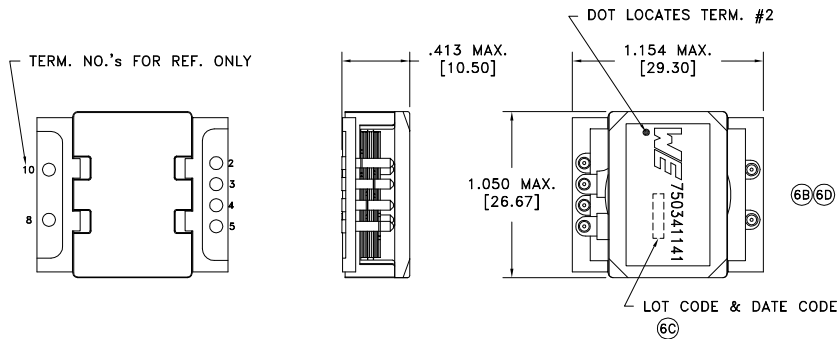

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

REV.	DATE	Packaging Specifications	CONVENTION PLACEMENT	Tolerances unless otherwise specified: Angles: ±1° Fractions: ±1/64 Decimals: ±.005 [.13] Footprint: ±.005 [.13]	DRAWING TITLE	PART NO.
6D	5/14	Method: Tape & Reel			TRANSFORMER	750341141
6C	11/12	PKG-0793				
6B	4/12	www.we-online.com/midcom				
6A	10/11	SEE REVISION SHEET FOR REVISION LEVEL				
				This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750341141	SPECIFICATION SHEET 1 OF 1



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Wurth Electronics:](#)

[750341141](#)