
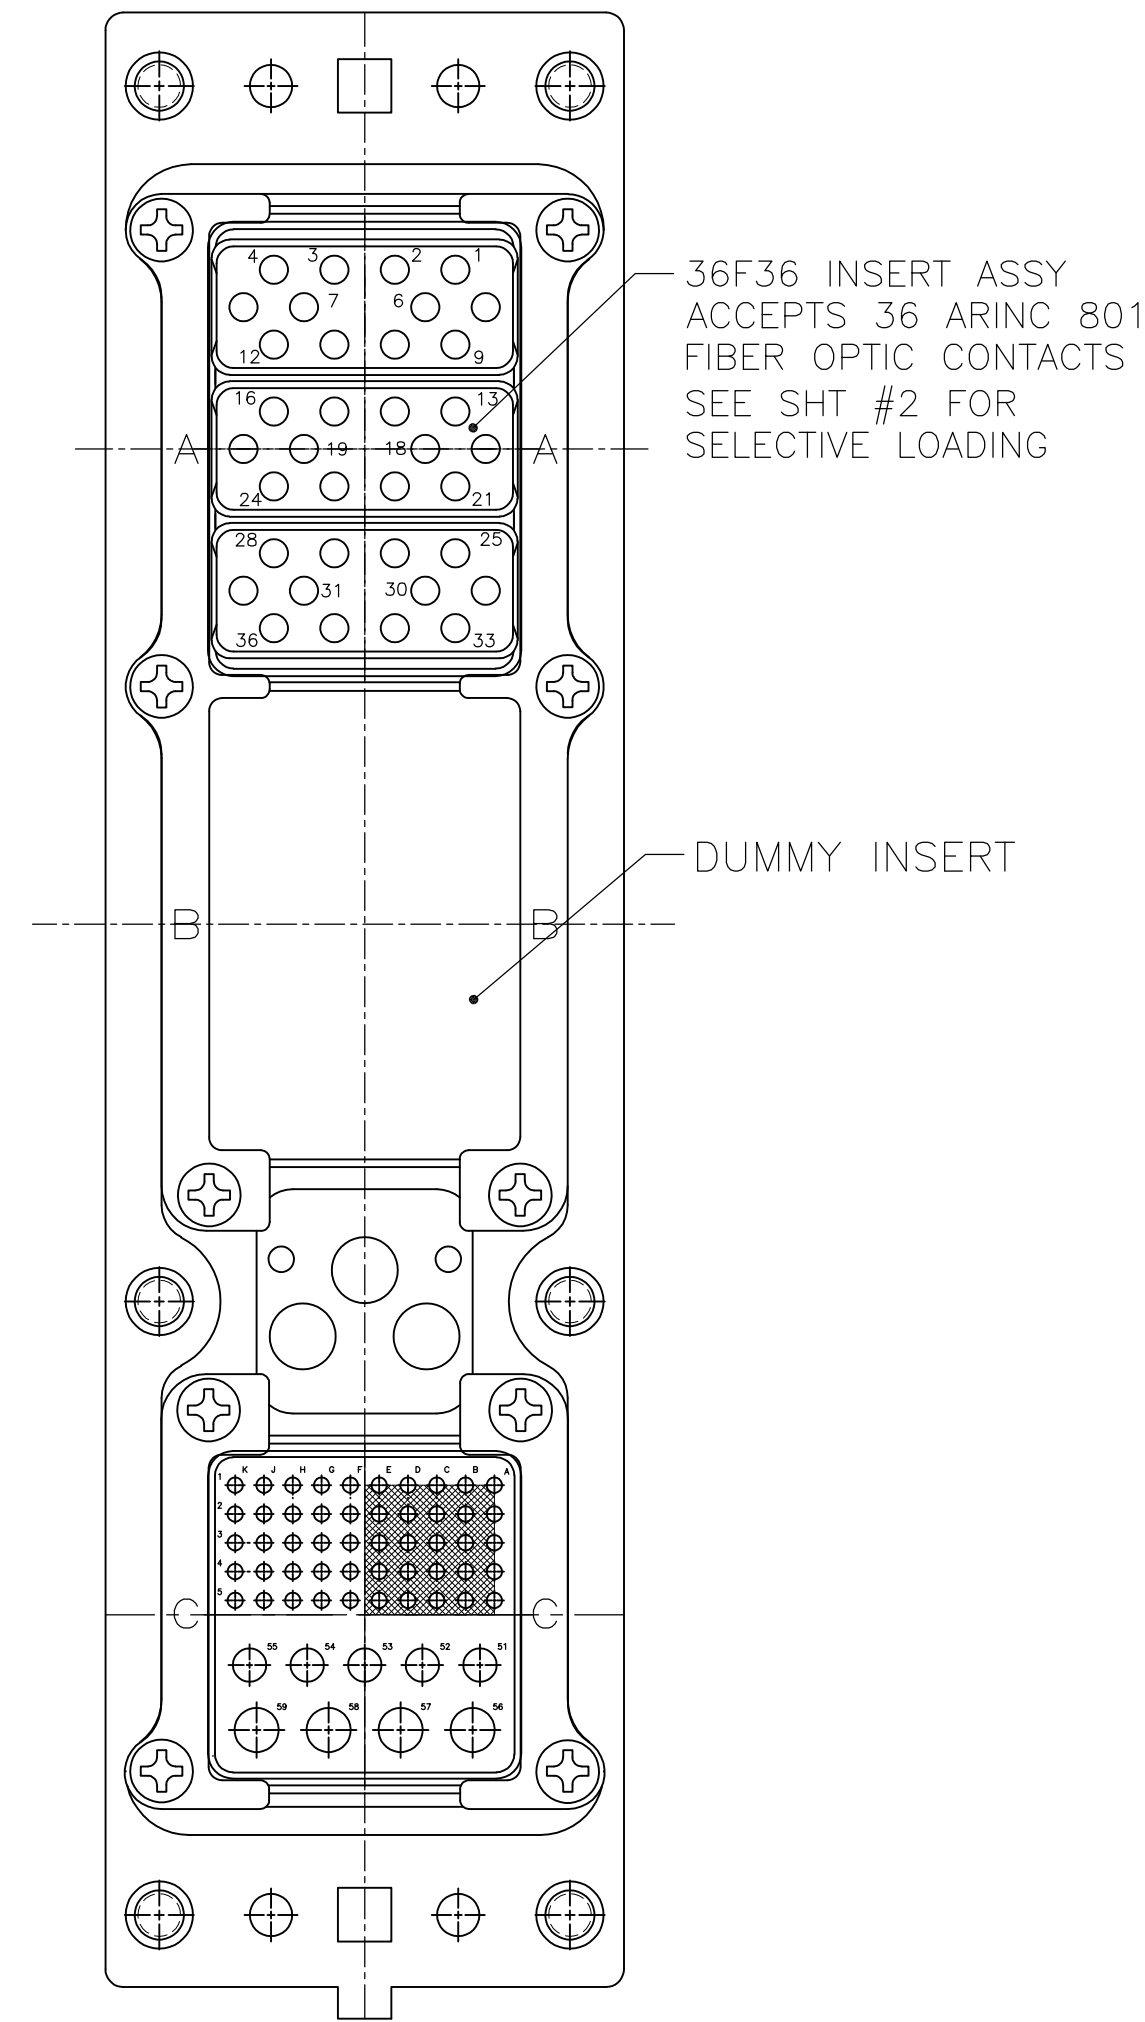


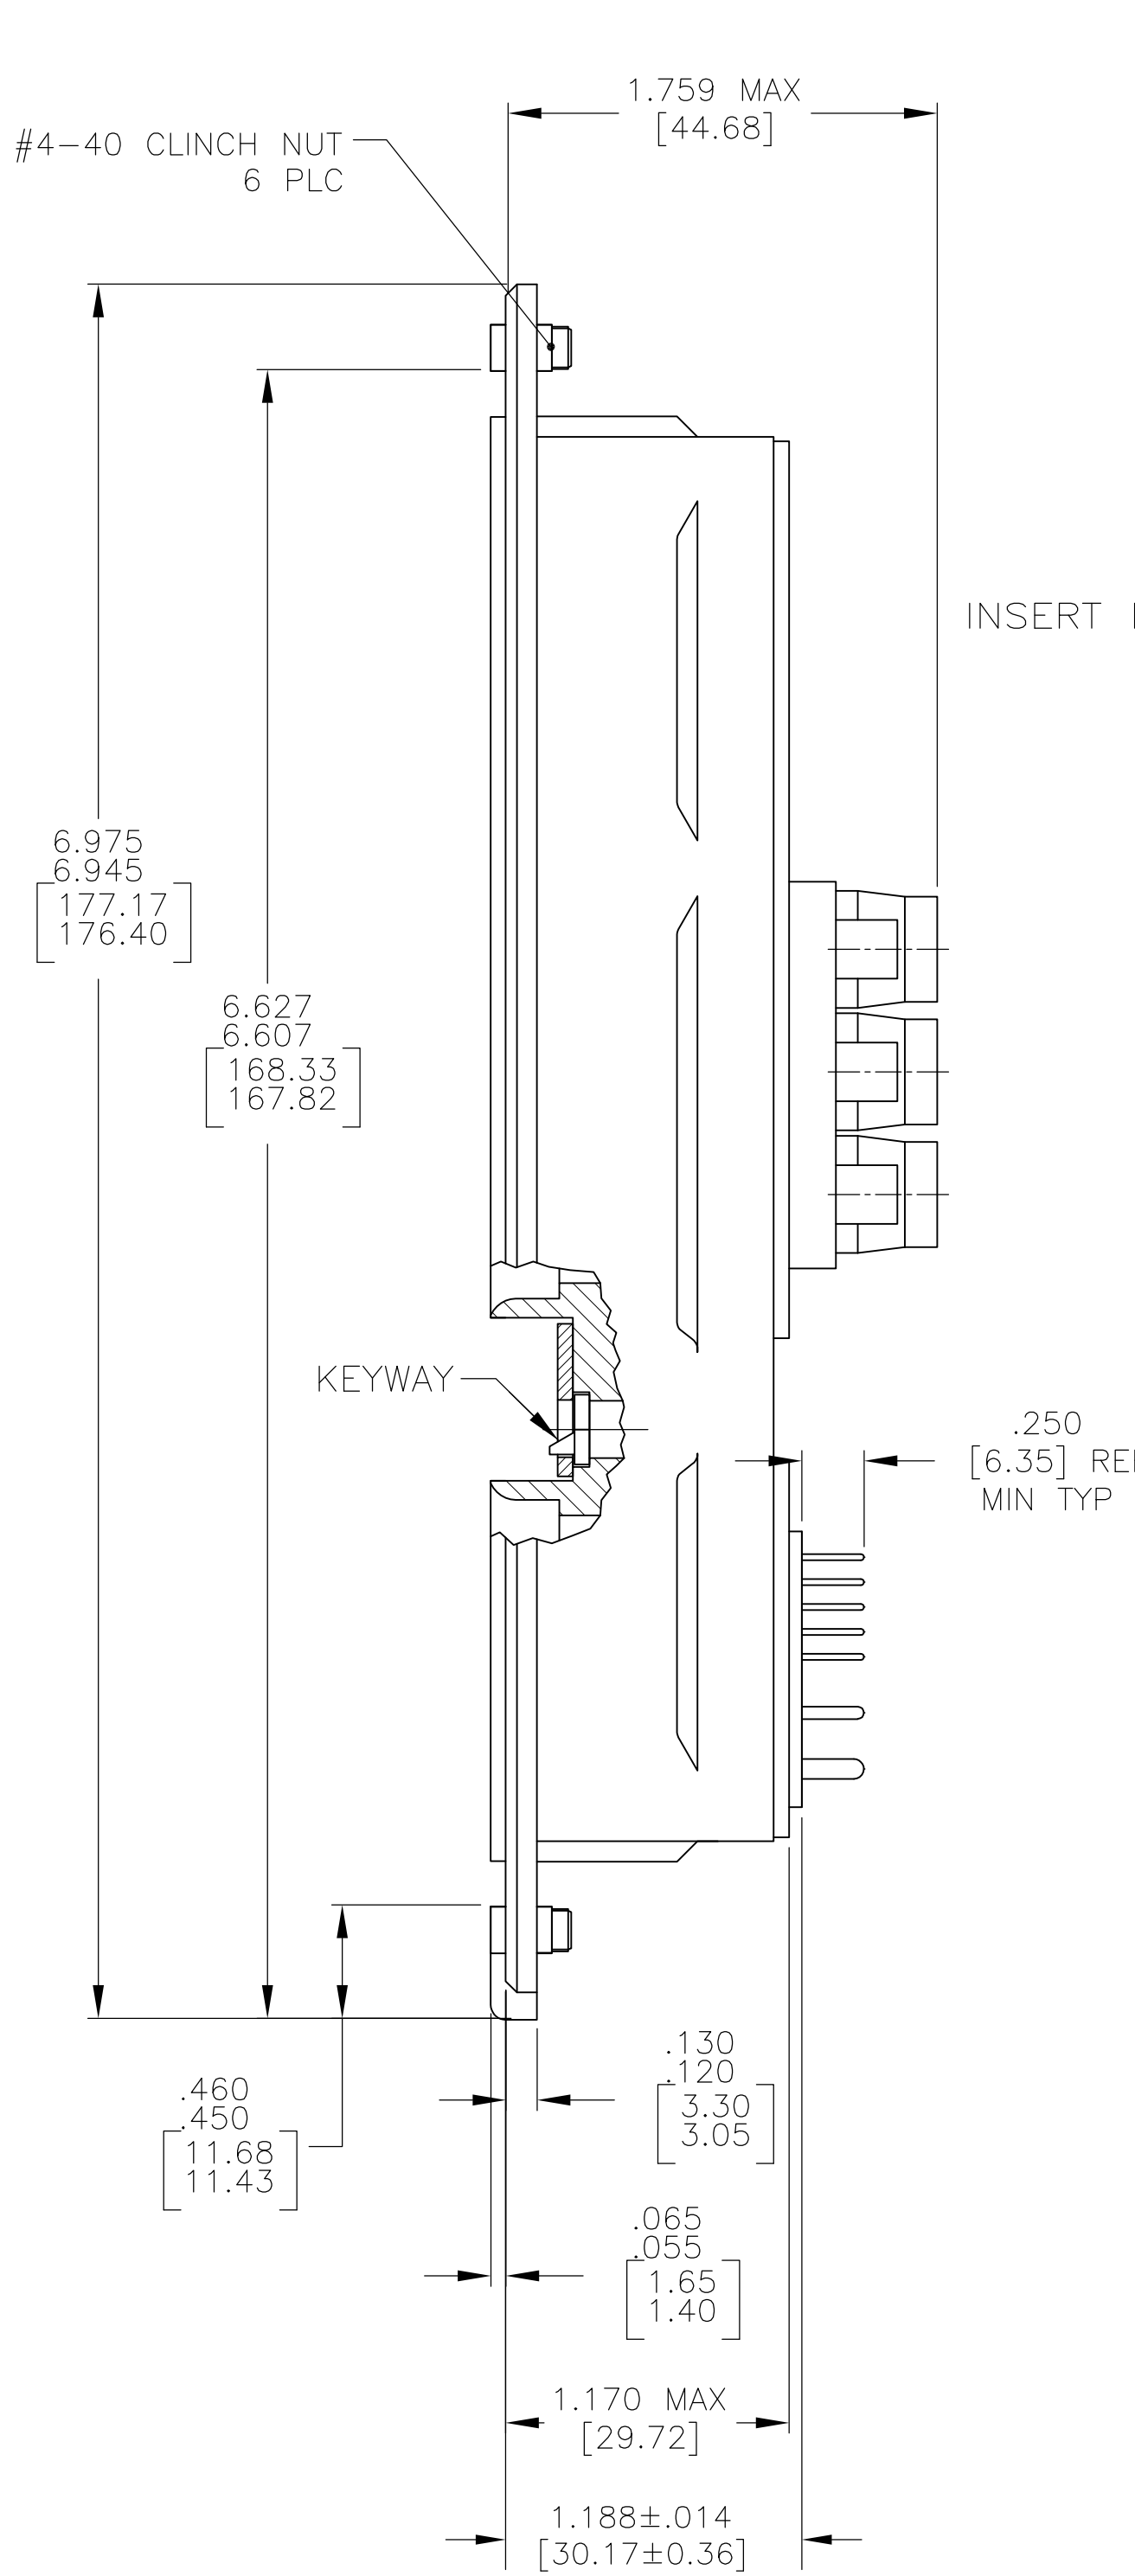

- 36F36 INSERT ASSY
ACCEPTS 36 ARINC 801
FIBER OPTIC CONTACTS
SEE SHT #2 FOR
SELECTIVE LOADING

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG: C.C.THOMAS 1-3-07 CHK: K.HOGAN 1-3-07		 TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES: UNLESS OTHERWISE SPECIFIED: 0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± — 4 PLC ± — ANGLES ± ± —		NAME RCPT ASSY,SIZE 2,ARINC 600	
		APD: K.HOGAN 1-3-07 PRODUCT SPEC — APPLICATION SPEC —		SIZE A1 00779	
MATERIAL SEE TABLE		WEIGHT —		DRAWING NO C-1883150	
FINISH SEE TABLE		CUSTOMER DRAWING		SCALE: 1.5:1 SHEET 1 OF 2 REV H	

- | COMPONENT | MATERIAL | FINISH |
|-------------------------------------|--|---|
| SHELL | DIE CAST ALUMINUM
PER ASTM-B-85 | ELECTROLESS NICKEL
PER MIL-C-26074 |
| INSERT
RETENTION PLATES | ALUMINUM ALLOY
PER ASTM-B-209 | ELECTROLESS NICKEL
PER MIL-C-26074 |
| FLAT HEAD SCREWS
AND LOCKWASHERS | STAINLESS STEEL | PASSIVATED |
| POLARIZING KEYS | ZINC ALLOY
PER ASTM-B-86 | - |
| POLARIZING KEY
RETAINING PLATE | ALUMINUM ALLOY
PER ASTM-B-209 | BLUE ANODIZED
PER MIL-A-8625 |
| CLINCH NUT | STEEL | TRIVALENT CHROMATE
OVER ZINC PLATE
WITH MOLY LUBE |
| 36F36 INSERT | THERMOSET OR
THERMOPLASTIC PPS
PER MIL-M-24519 | - |
| DUMMY
INSERT | ALUMINUM ALLOY
PER ASTM-B-85 | ELECTROLESS NICKEL
PER MIL-C-26074 |
| 59 POSITION
INSERT | THERMOSET OR
THERMOPLASTIC PPS
PER MIL-M-24519 | - |

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1883150-1](#)