

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

1700718011

Status:

Active

Overview:

High-Speed Pluggable I/O Solutions

Description:

zSFP+ Stacked Ganged Assembly with Elastomeric Gasket, 2-by-8 with 4 Light Pipes, 320 Circuits

Documents:

3D Model

Drawing (PDF)

Product Specification PS-170071-0001 (PDF)

Application Specification AS-170071-0002-001 (PDF)

Test Summary TS-170071-0001-001 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification

UL

E29179

General

Product Family

Series

Application

Component Type

Electrical Model

Overview

Product Name

Type

UPC

I/O Connectors

170071

Module-to-Board

Receptacle

Yes

High-Speed Pluggable I/O Solutions

zSFP Plus, zSFP+

N/A

884982402362

Physical

Circuits (Loaded)

Color - Resin

Durability (mating cycles max)

Flammability

Gender

Lock to Mating Part

Material - Metal

Material - Plating Mating

Material - Plating Termination

Material - Resin

Net Weight

Number of Rows

Orientation

PCB Locator

PCB Retention

PCB Thickness - Recommended

Packaging Type

Panel Mount

Pitch - Mating Interface

Pitch - Termination Interface

Plating min - Mating

Plating min - Termination

Polarized to Mating Part

Polarized to PCB

Ports

Surface Mount Compatible (SMC)

Temperature Range - Operating

Termination Interface: Style

320

Black

100

94V-0

Female

Yes

High Performance Alloy (HPA)

Gold

Matte Tin

High Temperature Thermoplastic

192.055/g

2

Right Angle

Yes

Yes

2.36mm

Tray

No

0.80mm

0.80mm

0.762µm

0.762µm

Yes

Yes

16

No


-40° to +85°C

Through Hole - Compliant Pin

Electrical

Current - Maximum per Contact

0.5A

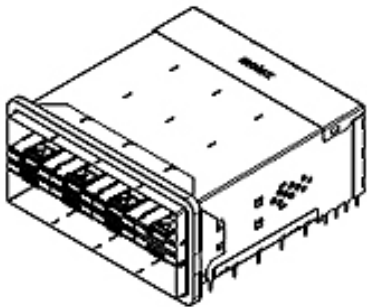

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
ED/71/2019 (16 July
2019)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

170071 Series

Application Tooling | [FAQ](#)

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
2-by-8 Stacked Multi-Port Insertion Tool	622029815
Removal Tool for 2 by 8 Small Form-Factor Pluggable	622029820

Shield Type	N/A
Shielded	Yes
Voltage - Maximum	30V AC
Solder Process Data	
Lead-freeProcess Capability	N/A
Material Info	
Reference - Drawing Numbers	
Application Specification	AS-170071-0002-001
Electrical Model Document	EE-170071-0001
Product Specification	PS-170071-0001
S-Parameter Model	SP-170426-1000
Sales Drawing	1700710002-000, SD-170071-0005-001
Symbol/Footprint Data	SYM-170071-0001
Test Summary	TS-170071-0001-001

This document was generated on 10/16/2019

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[170071-8011](#)