




TMM-112-01-F-S-SM

TMM SERIES

LOW-PROFILE SMT HEADER



Specify
2SN-BK-G
for 2 mm
shunt with
Gold plating.

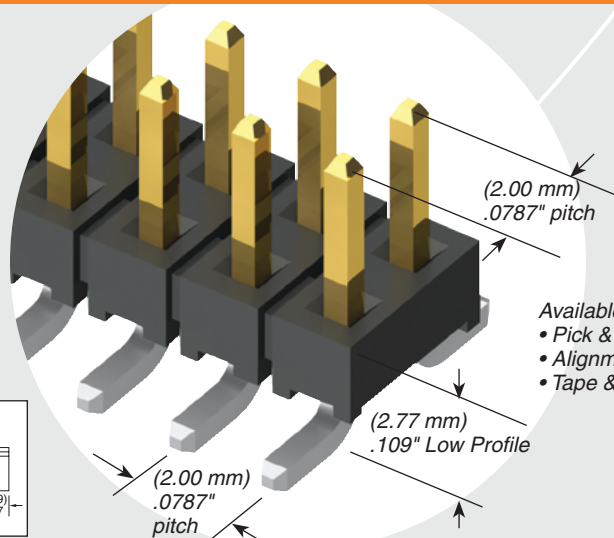

TMM **1** **NO. PINS** **PER ROW** **LEAD** **STYLE** **PLATING** **OPTION** **ROW** **OPTION** **SM** **OTHER** **OPTION**

02 thru 40

**Specify
LEAD
STYLE
from
chart
below.**

PLATING OPTION

-F
= Gold flash on post,
Matte Tin on tail

-L
= 10 μ" (0.25 μm)
Gold on post,
Matte Tin on tail

-S
= 30 μ" (0.76 μm)
Gold on post,
Matte Tin on tail

-T
= Matte Tin

ROW OPTION

—D
= Doub
Row

SM


OTHER OPTION

—A
= Alignment Pin
(Metal or plastic at
Samtec's discretion)
(5 positions minimum)
(—D only)


—“XXX”
= Polarized Position
(Specify position of
omitted pin)

-P
= Pick & Place Pad
(3 positions minimum)

-TR
= Tape & Reel Packaging
(3 thru 36 positions only)



LEAD STYLE	A	MATES WITH
–01	(3.20) .126	SQT, SQW, ESQT, TLE, SMM, MMS, TCSD
–04	(1.91) .075	CLT
–05	(1.65) .065	
–06	(4.27) .168	CLT-BE

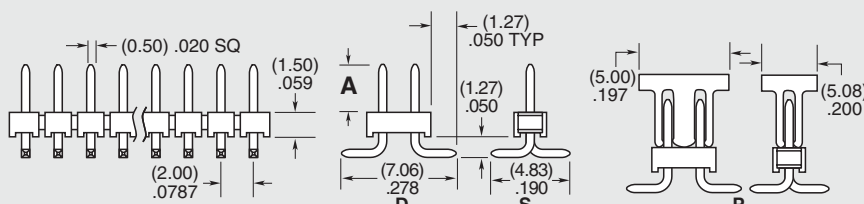

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

All parts within this catalog are built to Samtec's specifications.

Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.

Note:
Some lengths, styles and options are non-standard, non-returnable.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Samtec:](#)

[TMM-103-01-T-D](#)