

# Molded RF Chokes

## Special Features


- High Q, high reliability
- Iron or ferrite core
- Injection molded to protect coil from extreme environment
- Flame retardant coating
- Consistent body dimension
- Color band or numerical marking identification
- Dielectric strength 1000VRMS
- Operating temperature -55 to +105°C

## Notes

- \* Current to cause 35°C maximum temperature rise

9210 Series						
Part Number	L (μH) ±5%	Q Min.	Test Freq. (MHz)	SRF (MHz) Min.	DCR Ω Max.	I, DC* (mA)
9210-54	36	60	2.5	15.5	2.5	180
9210-56	39	60	2.5	14.5	2.6	176
9210-58	43	60	2.5	13.7	2.7	172
9210-60	47	55	2.5	13.0	2.75	170
9210-62	51	55	2.5	12.7	2.85	167
9210-64	56	55	2.5	12.0	3.0	164
9210-66	62	55	2.5	11.5	3.15	160
9210-68	68	55	2.5	11.0	3.3	156
9210-70	75	55	2.5	10.5	3.7	147
9210-72	82	50	2.5	10.3	3.9	143
9210-74	91	50	2.5	10.0	4.3	136
9210-76	100	50	2.5	9.5	4.5	133
9210-78	110	60	0.79	8.9	4.9	128
9210-80	120	65	0.79	8.7	5.2	124
9210-82	130	65	0.79	8.5	5.45	121
9210-84	150	65	0.79	8.0	6.05	114
9210-86	160	65	0.79	7.5	6.40	111
9210-88	180	65	0.79	7.0	6.75	108
9210-90	200	65	0.79	6.5	7.1	106
9210-92	220	65	0.79	6.2	7.45	103
9210-94	240	65	0.79	5.9	7.8	101

Also available as RoHS compliant.

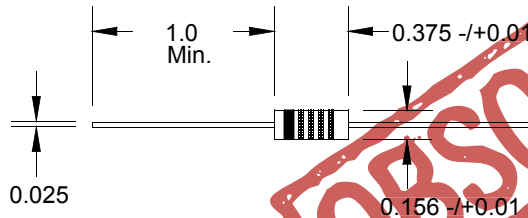

Dimensions: Inches

**J.W. Miller**  
M A G N E T I C S

306 E. Alondra Blvd. Gardena, CA 90247-1059 • Phone (310) 515-1720 • FAX (310) 515-1962

www.jwmiller.com



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Bourns:

[9210-54](#) [9210-56](#) [9210-58](#) [9210-60](#) [9210-62](#) [9210-64](#) [9210-66](#) [9210-68](#) [9210-70](#) [9210-72](#) [9210-74](#) [9210-76](#)  
[9210-78](#) [9210-80](#) [9210-82](#) [9210-84](#) [9210-86](#) [9210-88](#) [9210-90](#) [9210-94](#) [9210-54-RC](#) [9210-76-RC](#) [9210-60-RC](#)  
[9210-78-RC](#) [9210-58-RC](#) [9210-86-RC](#) [9210-88-RC](#) [9210-68-RC](#) [9210-84-RC](#) [9210-66-RC](#) [9210-64-RC](#) [9210-56-](#)  
[RC](#) [9210-90-RC](#) [9210-72-RC](#) [9210-70-RC](#) [9210-62-RC](#) [9210-80-RC](#) [9210-82-RC](#) [9210-94-RC](#) [9210-74-RC](#)