




MALE

D-SUB CRIMP TYPE

Specifications

- Contact Resistance: 30m max. at DC
- 100mA
- Insulator Resistance: 1000M min. at DC
- 500V
- Current Rating: 5 AMP
- Dielectric Withstanding
- Voltage: AC 1000V For 1 minute
- Operating Temperature: -55°C ~ +105°C
- Contact: Brass
- Housing: PBT & 30% Glass Fiber (UL 94V-0)

ROHS compliant
MSL components : level 3

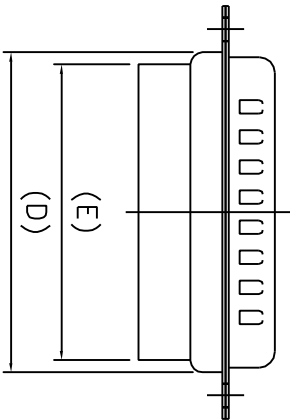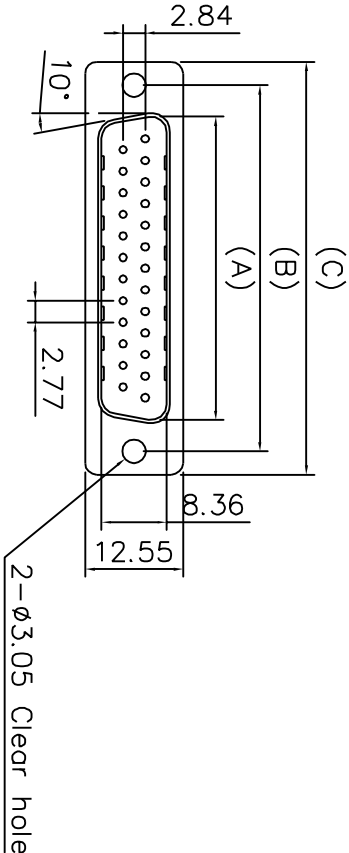

L777RR - - P

Shell size

Nber of cts

09-15-25-37

- E = 09 ways
- A = 15 ways
- B = 25 ways
- C = 37 ways

Dimension

Position	A	B	C	D	E
9	16.92	24.99	30.81	19.20	15.45
15	25.50	33.32	39.14	27.70	24.45
25	38.96	47.04	53.04	41.10	38.00
37	55.42	63.50	69.32	57.30	53.96

TOLERANCE m/m		APPROVALS		DATE		TITLE	
X	0.05	DRAWN	CDU	17/05/06	RR SERIES D-SUB CONNECTOR CRIMP VERSION PLUG	AMPHENOL SOGAPEX Dole Plant	
	0.1	CHECKED	JF.L	17/05/06			
	0.3	APPROVED	JF.L	17/05/06			
UNLESS OTHERWISE SPECIFIED		UNIT :		MM	SIZE :	DRAWING N°	REV
					A4	L777RR - - P----	A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[L777RRA15P](#) [L777RRB25P](#) [L777RRE09P](#) [L777RRC37P](#)