
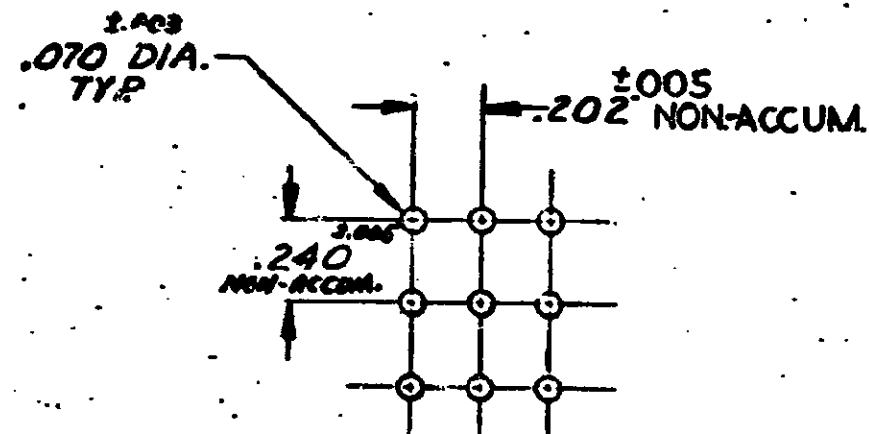


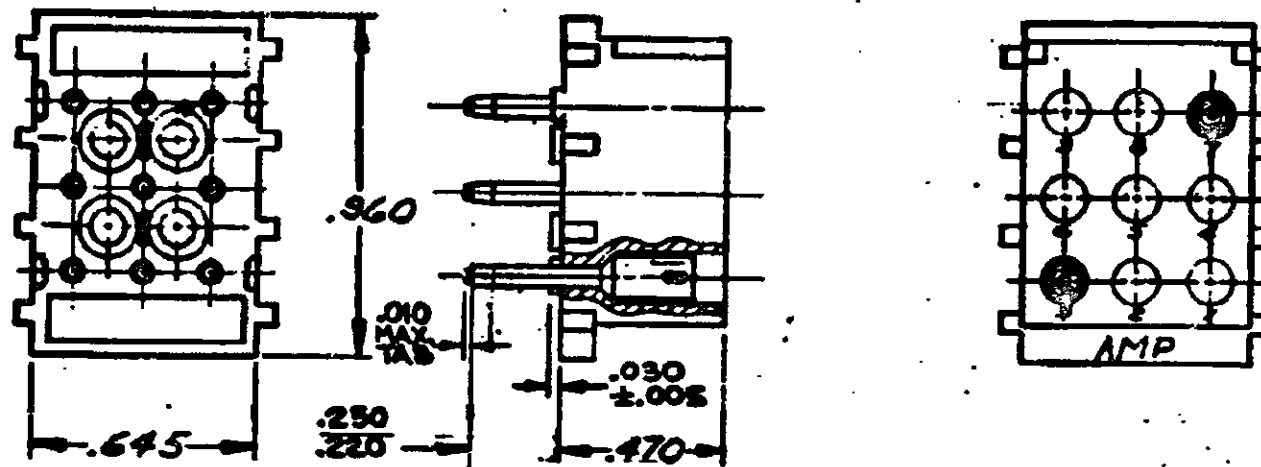

RECOMMENDED LAYOUT FOR
.125 THICK P.C. BOARD

1. MATES WITH HOUSING 480277.
2. PARTS COMPLY WITH AMP SOLDERABILITY SPEC. NO. 107-11-3

Unpublished copy not to be reproduced nor published
without written permission of AMP Incorporated

	OBSELETE -2, 1-1, 2, 2, 1	KW	RS	4-21-86
G	2-23, 3-2, 4-1, 4-2, 5, 5, 2, 1			
	6-27, 1-1, 2, 8, 8, 2, 9, 1, 9, 2, 1, 9, 2, 1			
F	RESTORED	BXP	RS	4/3/85
F	REV. PER M-7376	SS	SP	3-30-86
E	REVISED M-4161	MF	SH	3-3-77
D	ECN M-3871	REV	SH	2-76
C	ECN M-3452	SV	SP	3-3-77
B	REVISED PER P&G	SS	SP	3-3-77
A	ECN M-3156	SS	SP	3-3-77
-	PER ECN M-2996	SS	SP	3-3-77
LTR	REVISION RECORD	DR	CHK	DATE

NUMBER	DESCRIPTION
350577	REQUIRED PER ASSEMBLY

350577-1		NYLON - NATURAL	PHOS BRZ - PRE-TIN
ASSEMBLY NO.		HS6. MATL & COLOR	PIN MATL & FINISH
© 1973 BY AMP INCORPORATED. ALL RIGHTS RESERVED. AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING.			
DR 9.5.11.11 6-1-73 CHN C. Cramer 6-1-73 DC EMP/Houam 4/1/73 APP EMP/Houam 6/1/73		MATERIAL AND FINISH SEE TABLE WIRE - RANGE - INSULATION TOLERANCE EXCEPT AS NOTED SCALE NAME 9 CIRCUIT MATE-N-LOK P.C. BOARD SOCKET HEADER	
CLASS TYPE		AMP INCORPORATED HARTFORD, CONN. NO 350577 REV G	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[350577-1](#)