
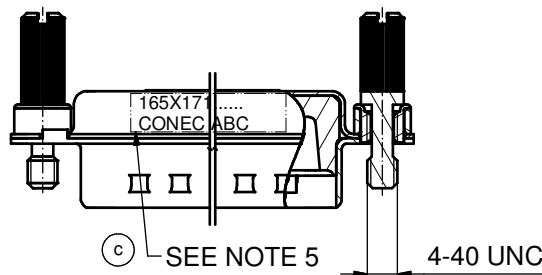
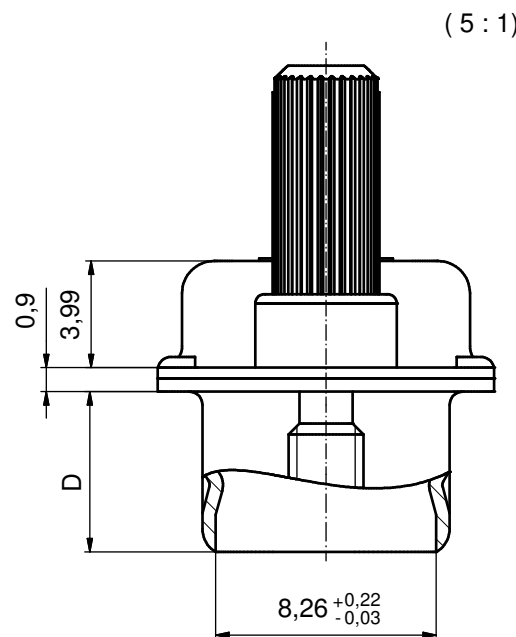


No. of pos.	A _{-0,76}	B _{+0,25}	C	D _{-0,3}	Part-No. Bulk package	Part-No. Single package
9	31,19	16,79	25,00 ^{+0,12 -0,13}	6,12	165X17109X	165X17109XE
15	39,52	25,12	33,30 ^{+0,15 -0,1}	6,12	165X17119X	165X17119XE
25	53,42	38,84	47,04 ± 0,13	5,99	165X17129X	165X17129XE
37	69,70	55,30	63,50 ± 0,13	5,99	165X17139X	165X17139XE


(b)

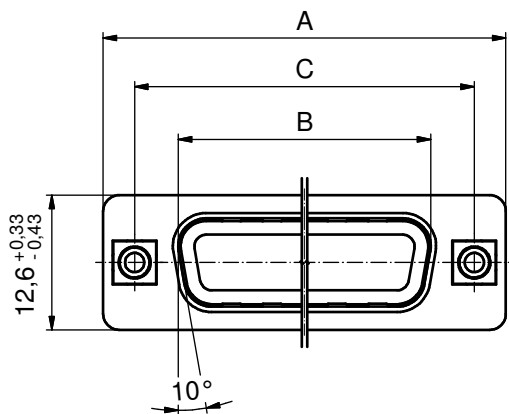

(c)


SEE NOTE 5

4-40 UNC

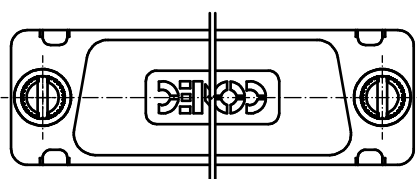

(c) NOTES:

1. METALSHELLS: COPPER ALLOY; min. 315µin TIN over 40-80µin NICKEL
2. INSULATOR: TPE
3. THREADED INSERTS: BRASS
4. SCREW: STEEL; NICKEL PLATED
5. CONNECTOR IS PART MARKED: **PART NO. CONEC ABC**

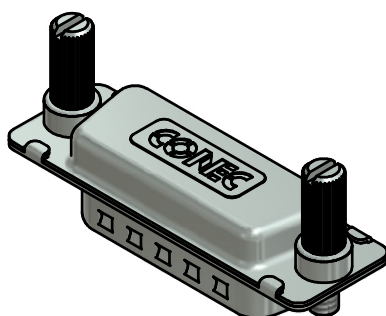

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.

OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

				tolerance		 dim. in mm		scale: 2:1 (5:1)	
								material: SEE NOTES	
				date	name		title: HOOD 9-37pos. WATER RESISTANT AND SHIELDED; FOR EMI/RFI for socket connector, with jack screws		
				drawn	30.07.03	LehmenKühler			
				appd.	30.07.03	Mickenbecker			
				DIN 41652					
				norm			dwg no: Inventor 10 16K1A988 part no: SEE TABLE		
2 x c	Ä3867	13.01.2011	K.H.	d-old			DIN-A3 sh: 1		
1 x b	Ä3781	21.10.2010	K.H.						
a	Origin								
rev.	description	date	name						

CONEC

HOOD 9-37pos.
WATER RESISTANT AND SHIELDED; FOR EMI/RFI
for socket connector, with jack screws

16K1A988

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

CONEC:

[165X17109X](#) [165X17129X](#) [165X17139X](#)