



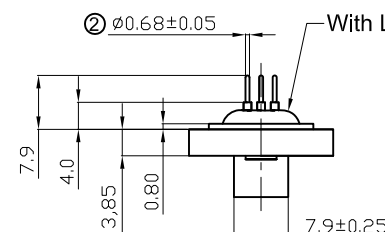

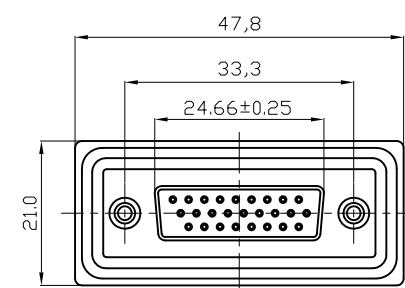
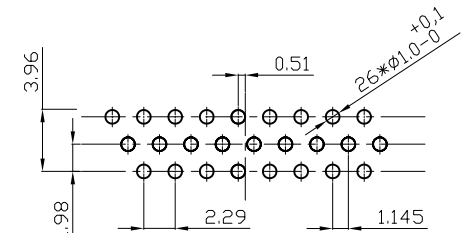


	1	2	3	4	5	6	7																																																																			
A	 Panel Thickness Screw L=5.0 For Panel Thickness Under 1.2mm Screw L=6.0 For Panel Thickness Between 1.2-2.0mm  Recommended Panel Cut-Out		   NOTES: MATERIAL 1.Insulator Material: Black,NYLON+G/F UL94V-0 ② 2.Contact Material: Copper Alloy ②3.Plating: 1u" Gold Plating 4.Waterproof Rate: IP67 5.Do Mating Test After Glued ②Electrical 1.Contact resistance: 20mΩ max. 2.Insulation resistance: 500MΩ min. at DC500V 3.Dielectric withstanding voltage: 500V AC 1 minute 4.Rating current: 5A 5.Durability: 500 cycles 6.Temperature range: -20°C ~ +85°C 7.Wave soldering temp.: +220°C 10s max.  26 Pin Female Connector PCB Pin Layout Scale 2:1					A																																																																		
B			B																																																																							
C			C																																																																							
D			D																																																																							
E			E																																																																							
F			F																																																																							
G	RoHS compliant Unit: mm		<table><tr><td>Scale</td><td>Free</td><td></td><td></td><td></td><td></td><td>Date</td><td>Name</td><td>Customer-No.</td></tr><tr><td colspan="2">TOLERANCE</td><td></td><td></td><td></td><td></td><td>Drawn</td><td>30.12.2008</td><td>JACK</td></tr><tr><td>X.X</td><td>±0.25</td><td></td><td></td><td></td><td></td><td>Approved</td><td>24.08.2020</td><td>Segal</td></tr><tr><td>X.XX</td><td>±0.10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>X.XXX</td><td>±0.05</td><td>③</td><td>Add the screw spec on page 2</td><td>24.08.2020</td><td>Segal</td><td></td><td></td><td></td></tr><tr><td>DIM</td><td>TOL</td><td>②</td><td>Change dimension and add notes</td><td>24.01.2018</td><td>Segal</td><td colspan="3" rowspan="2"> ASSMANN WSW components </td></tr><tr><td></td><td></td><td>①</td><td>Drawn</td><td>30.12.2008</td><td>JACK</td></tr><tr><td>Angle</td><td>±1°</td><td>Id.</td><td>Modification</td><td>Date</td><td>Name</td><td colspan="3"></td></tr></table>	Scale	Free					Date	Name	Customer-No.	TOLERANCE						Drawn	30.12.2008	JACK	X.X	±0.25					Approved	24.08.2020	Segal	X.XX	±0.10								X.XXX	±0.05	③	Add the screw spec on page 2	24.08.2020	Segal				DIM	TOL	②	Change dimension and add notes	24.01.2018	Segal	ASSMANN WSW components					①	Drawn	30.12.2008	JACK	Angle	±1°	Id.	Modification	Date	Name				ASSMANN WSW-No. A-HDF 26 PP-WP	G
Scale	Free					Date	Name	Customer-No.																																																																		
TOLERANCE						Drawn	30.12.2008	JACK																																																																		
X.X	±0.25					Approved	24.08.2020	Segal																																																																		
X.XX	±0.10																																																																									
X.XXX	±0.05	③	Add the screw spec on page 2	24.08.2020	Segal																																																																					
DIM	TOL	②	Change dimension and add notes	24.01.2018	Segal	ASSMANN WSW components																																																																				
		①	Drawn	30.12.2008	JACK																																																																					
Angle	±1°	Id.	Modification	Date	Name																																																																					
H	Drawing-No. ASS 3283 CO Replace Sheet 1/2						rev03	H																																																																		
	1	2	3	4	5	6	7																																																																			

	1	2	3	4	5	6	7	
A								A
B								B
C								C
D								D
E								E
F								F
G								G
H								H
	1	2	3	4	5	6	7	

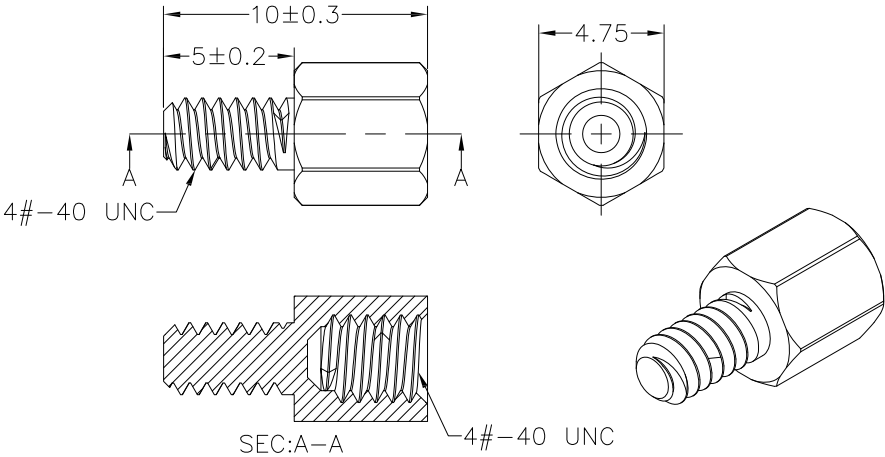

ASCW-000-01EB10

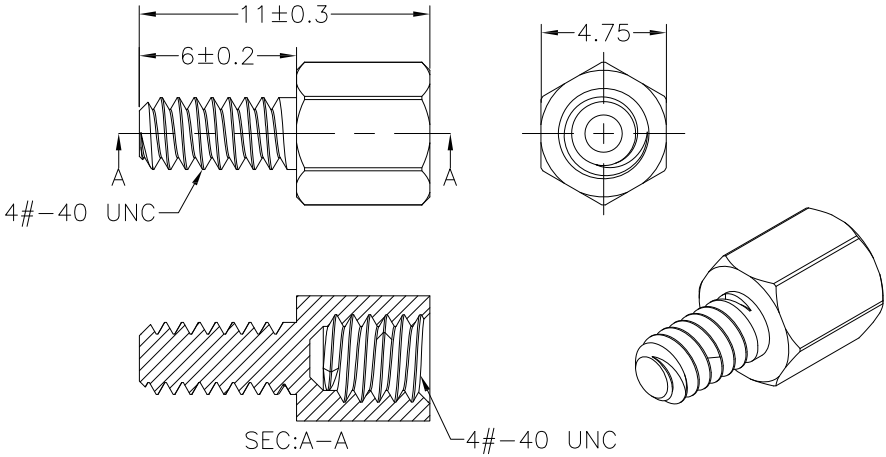

ASCW-000-01EB11

Technical requirements:
1.Material: Brass C3604;
2.Requirements: Bright nickel 100u" Min, salt spray 48H.

RoHS compliant
Unit: mm

Scale	Free					Date	Name	Customer-No.		
TOLERANCE					Drawn	30.12.2008	JACK			
X.X	±0.25							ASSMANN WSW-No. A-HDF 26 PP-WP		
X.XX	±0.10				Approved	24.08.2020	Segal			
X.XXX	±0.05	③	Add the screw spec on page 2	24.08.2020	Segal				Drawing-No. ASS 3283 CO	rev03
DIM	TOL	②	Change dimension and add notes	24.01.2018	Segal					
		①	Drawn	30.12.2008	JACK					
Angle	±1°	Id.	Modification	Date	Name					
Replace								Sheet 2/2		