
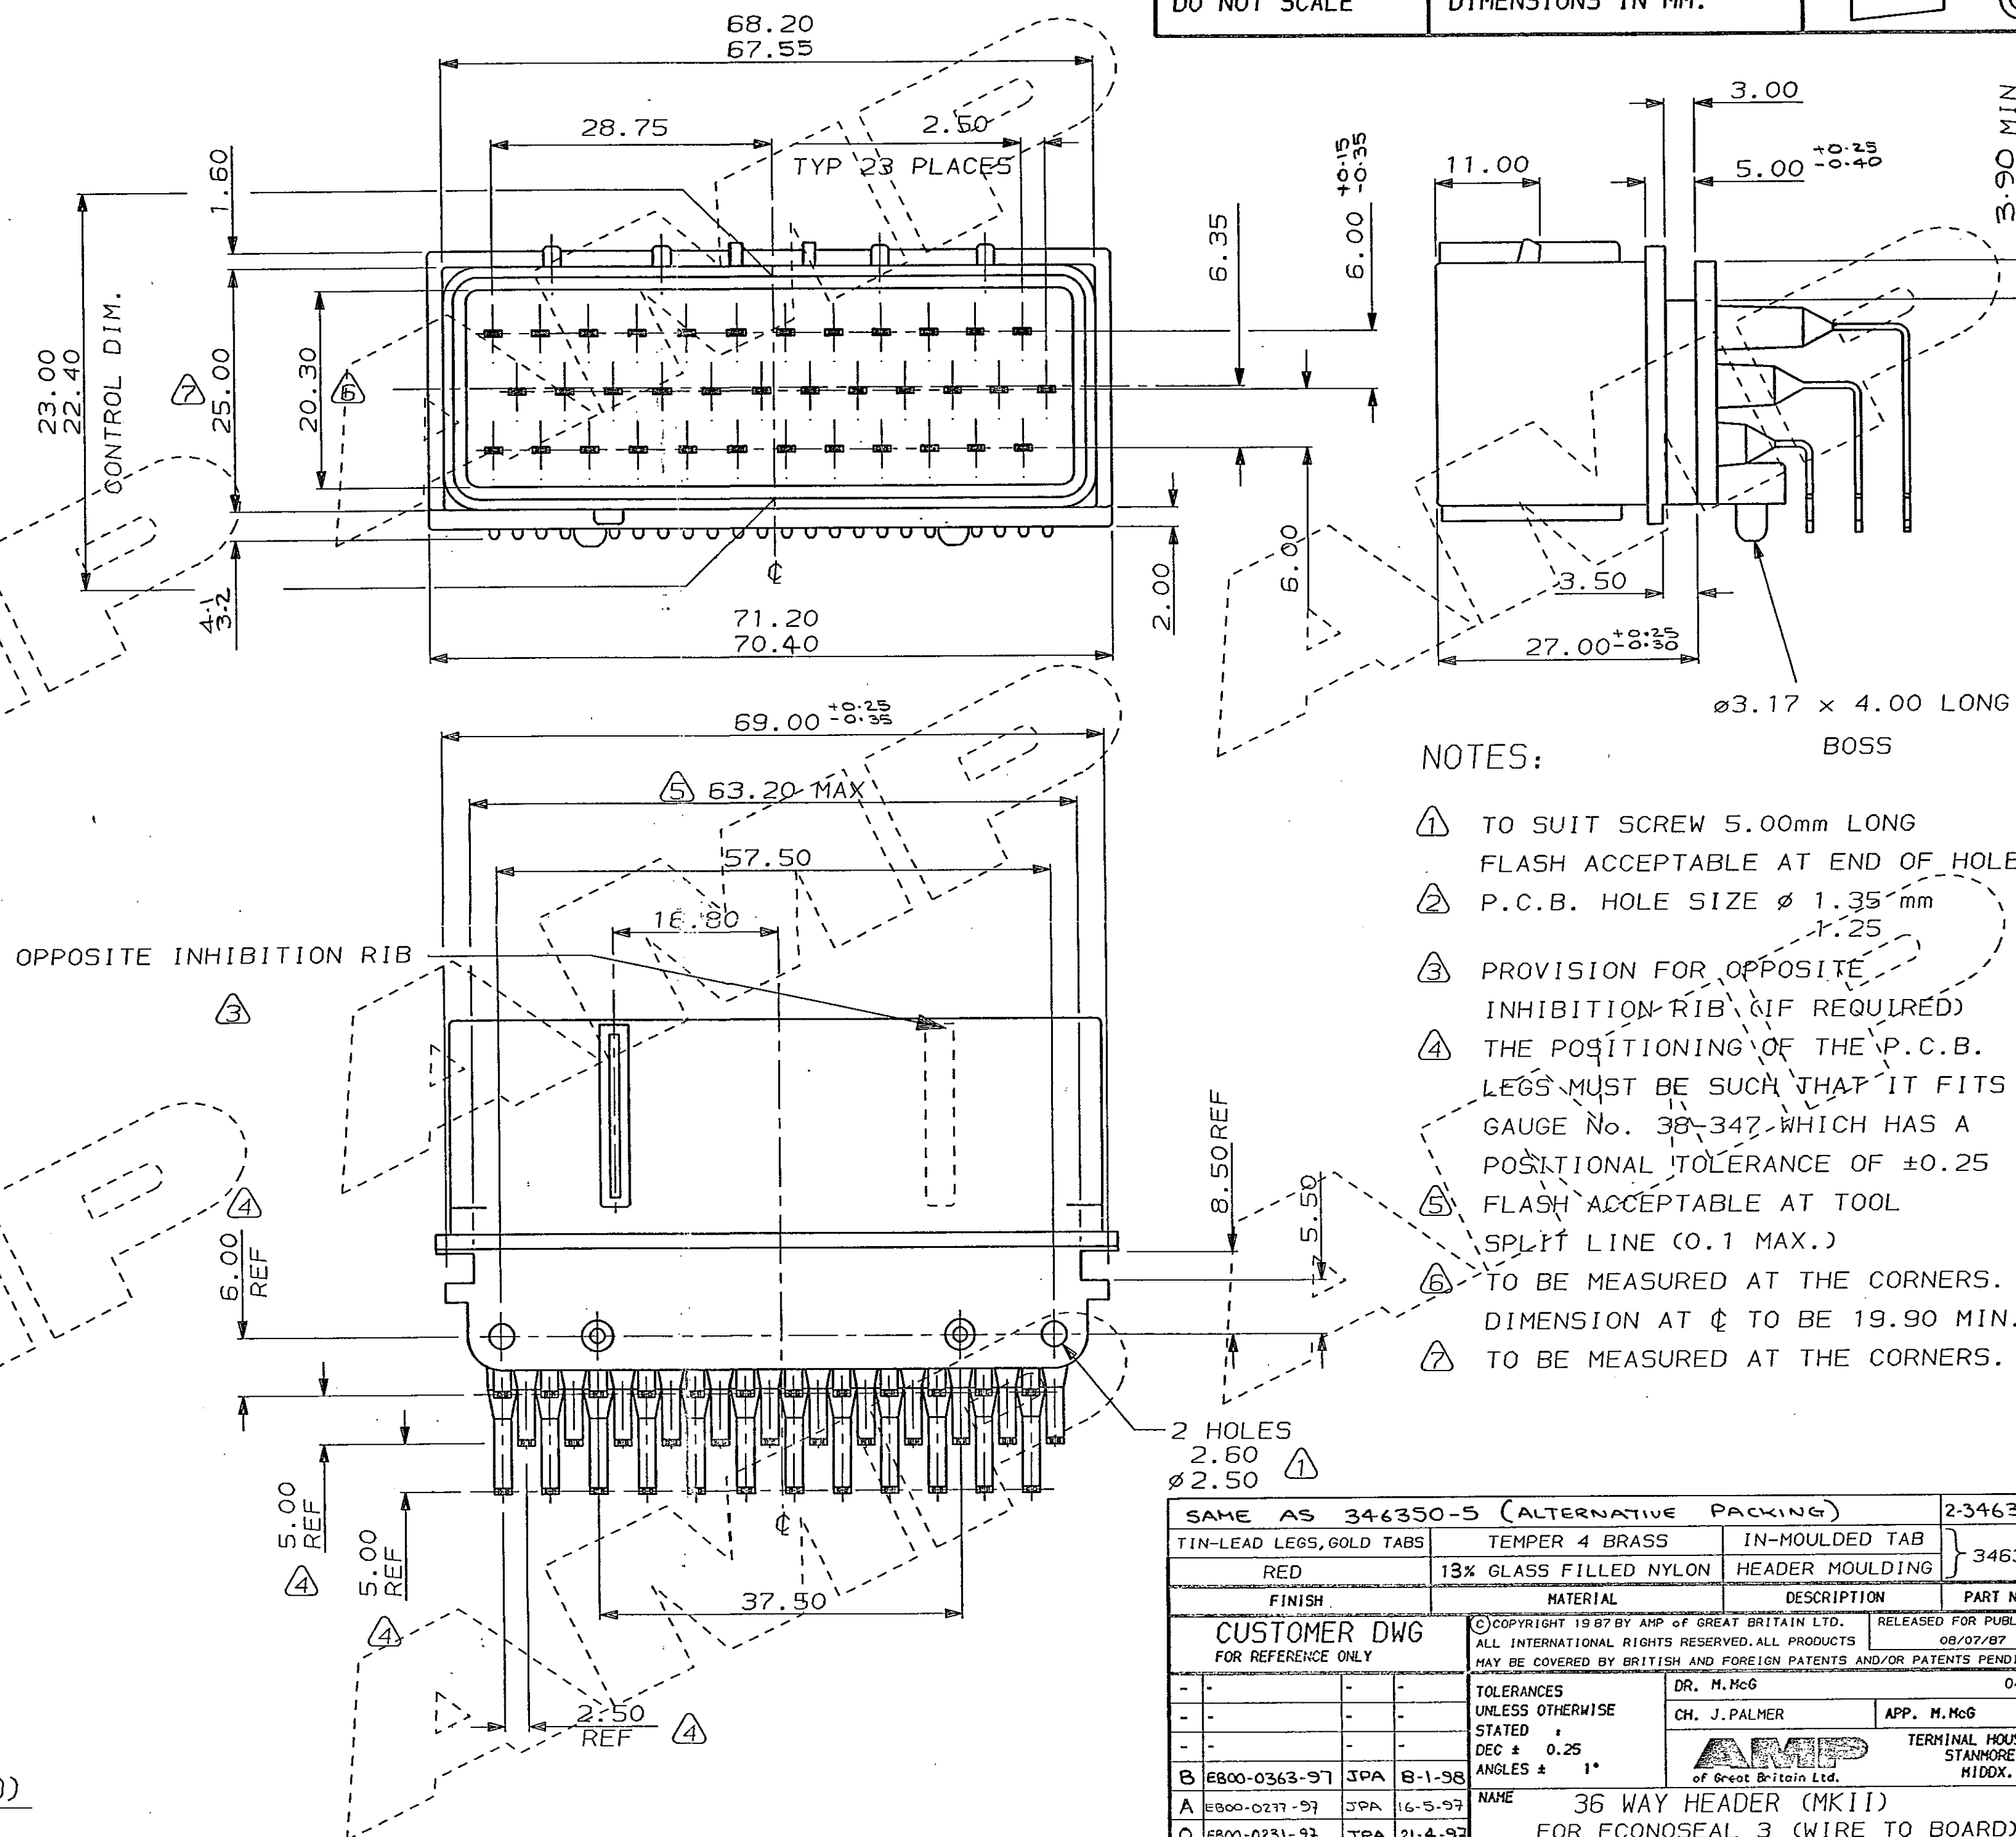


C.A.D. FILE CODE

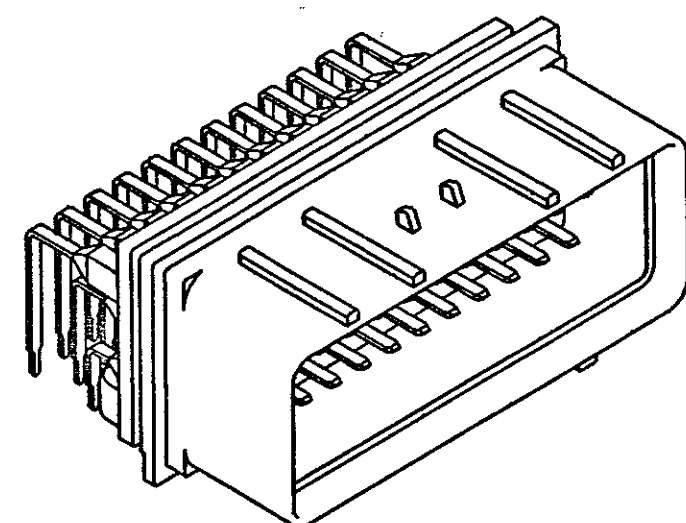

NOTES:

- ① TO SUIT SCREW 5.00mm LONG
FLASH ACCEPTABLE AT END OF HOLE
- ② P.C.B. HOLE SIZE ϕ 1.35 mm
1.25
- ③ PROVISION FOR OPPOSITE
INHIBITION RIB (IF REQUIRED)
- ④ THE POSITIONING OF THE P.C.B.
LEGS MUST BE SUCH THAT IT FITS
GAUGE No. 38-347 WHICH HAS A
POSITIONAL TOLERANCE OF ± 0.25
- ⑤ FLASH ACCEPTABLE AT TOOL
SPLIT LINE (0.1 MAX.)
- ⑥ TO BE MEASURED AT THE CORNERS.
DIMENSION AT ϕ TO BE 19.90 MIN.
- ⑦ TO BE MEASURED AT THE CORNERS.

SCRAP VIEW OF PINS
SCALE 5:1

1.00
0.90

0.68
0.60

Ø 1.25 MIN

SCRAP VIEW OF PIN
DETAIL SHOWING MINIMUM
HOLE SIZE IN P.C.B (DOTTED)

SAME AS 346350-5 (ALTERNATIVE PACKING)				246350-5	
TIN-LEAD LEGS, GOLD TABS		TEMPER 4 BRASS		IN-MOULDED TAB	
RED		13% GLASS FILLED NYLON		HEADER MOULDING	
FINISH		MATERIAL		DESCRIPTION	
CUSTOMER DWG FOR REFERENCE ONLY		©COPYRIGHT 1987 BY AMP OF GREAT BRITAIN LTD. ALL INTERNATIONAL RIGHTS RESERVED. ALL PRODUCTS MAY BE COVERED BY BRITISH AND FOREIGN PATENTS AND/OR PATENTS PENDING.		RELEASED FOR PUBLICATION 08/07/87	
-	-	-	-	TOLERANCES	
-	-	-	-	UNLESS OTHERWISE	
-	-	-	-	STATED :	
B	E800-0363-97	JPA	8-1-98	DEC ± 0.25	
A	E800-0237-97	JPA	16-5-97	ANGLES ± 1°	
O	E800-0231-97	JPA	21-4-97	NAME	
1	M. McS	-	04/03/91	36 WAY HEADER (MK11)	
REV	APPROVED	ECN	DATE	FOR ECONOSEAL 3 (WIRE TO BOARD)	
		SCALE	LOC	SIZE	DWG. No.
		2 / 1	E	A2	C346350
					REV
					SHEET
					B
					1 / 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[346350-5](#)