

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED

© COPYRIGHT

By

ALL RIGHTS RESERVED

1 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS

2 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER
IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD

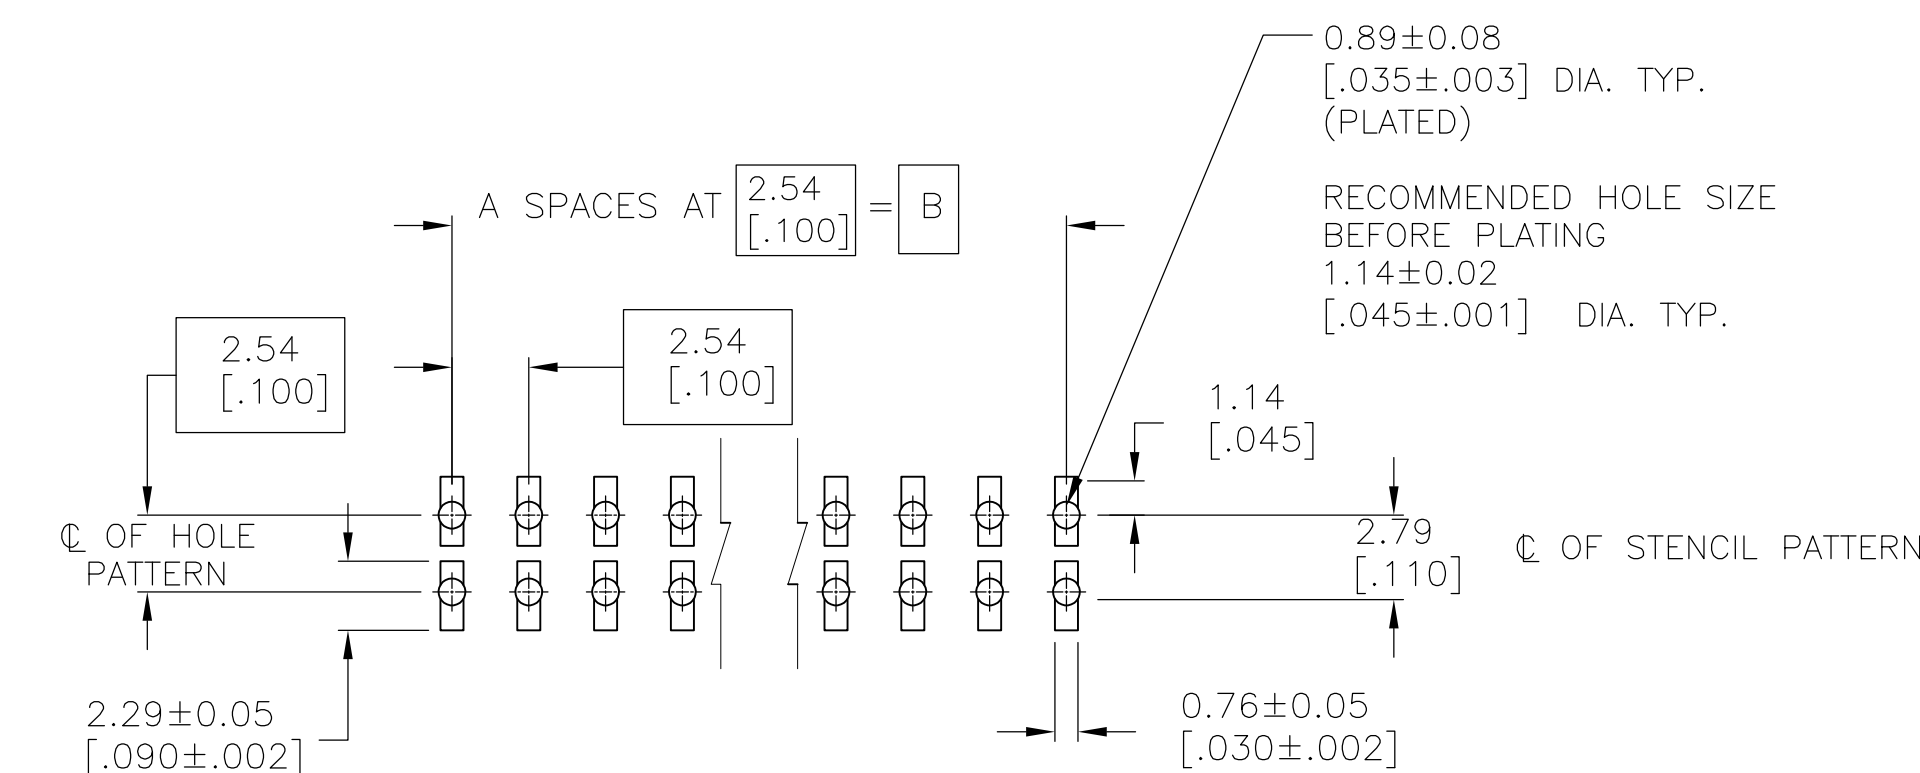
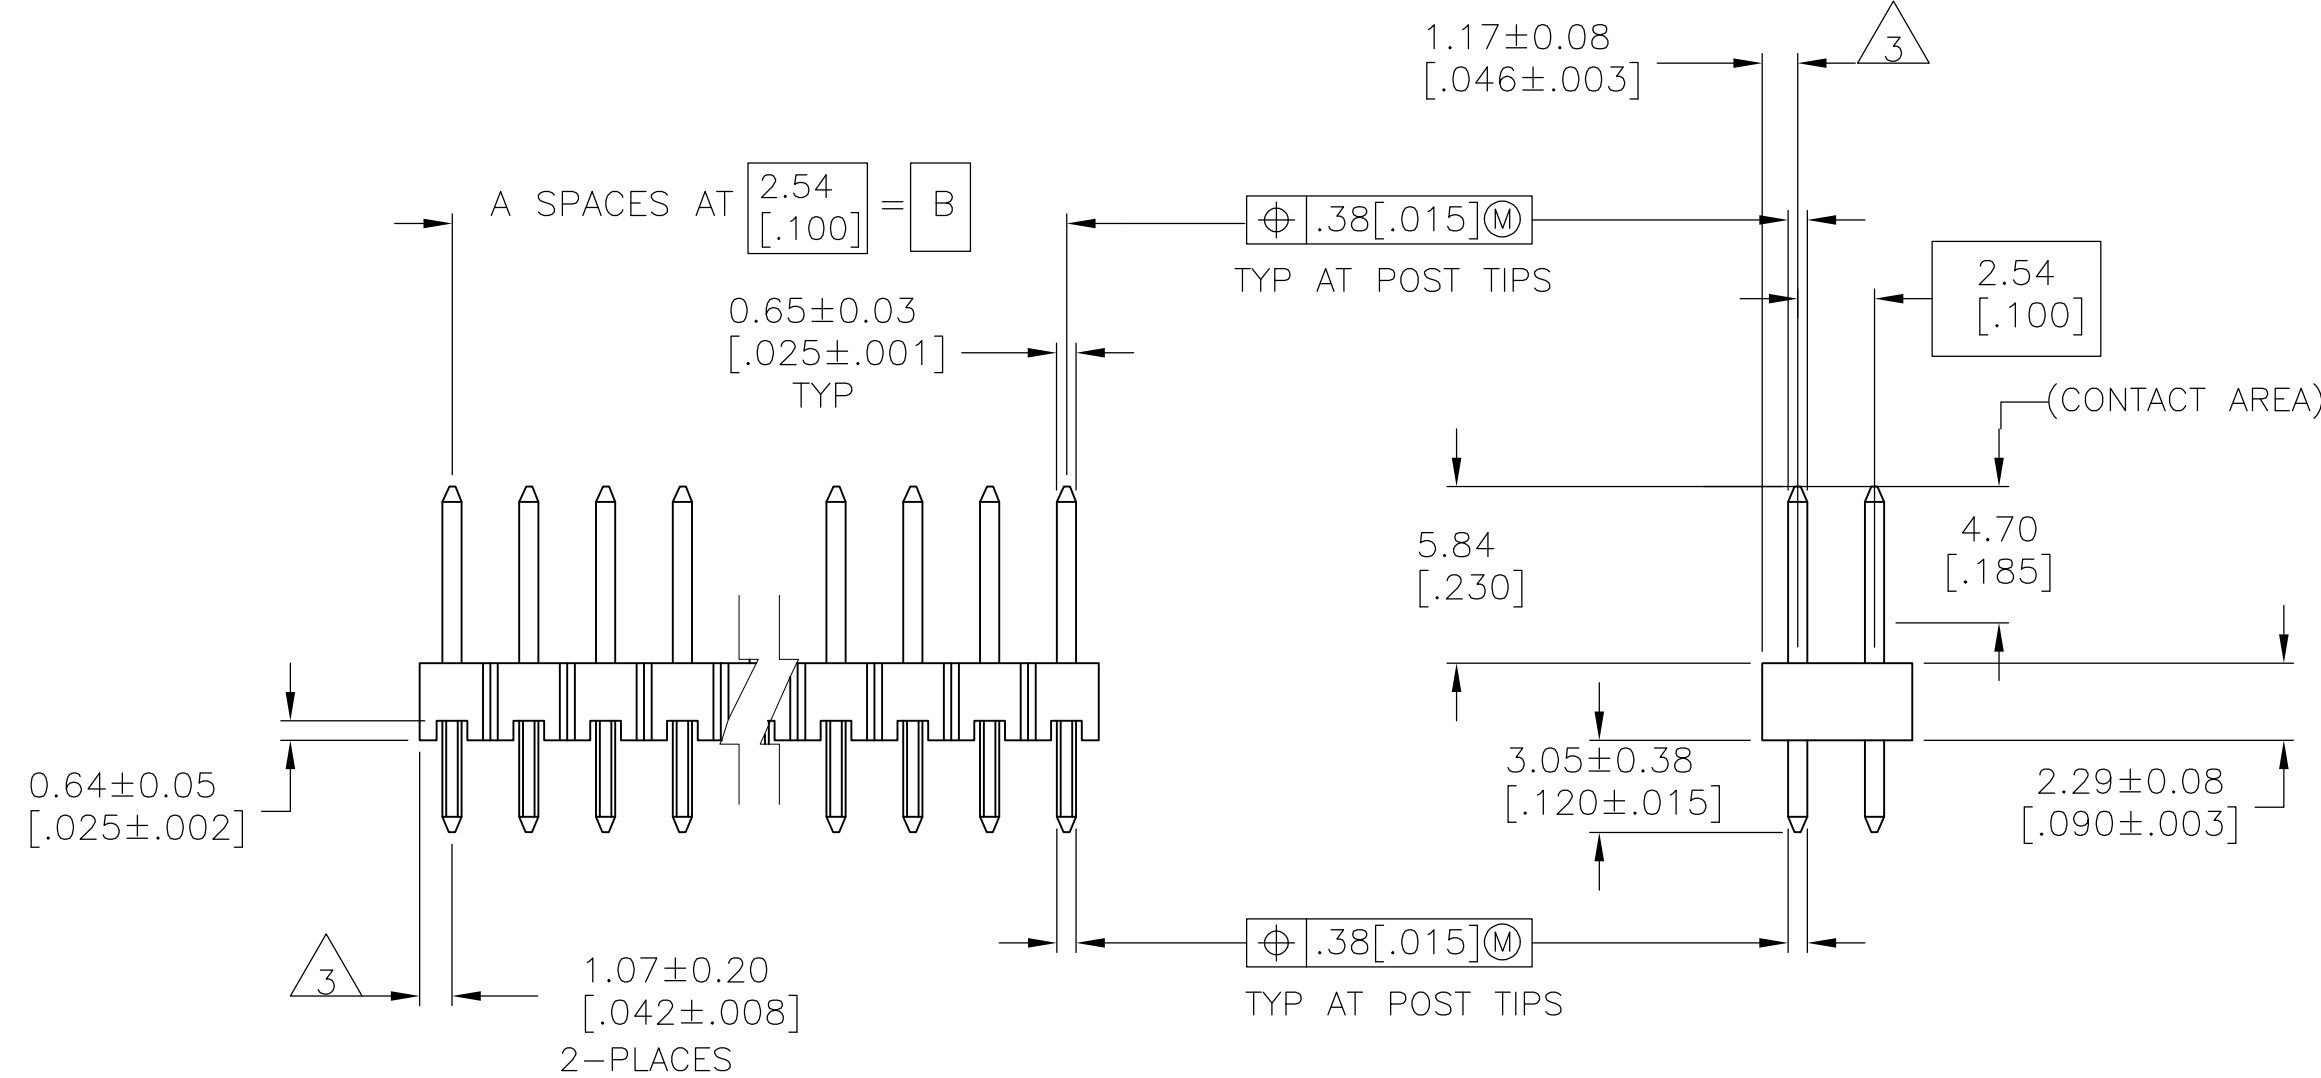
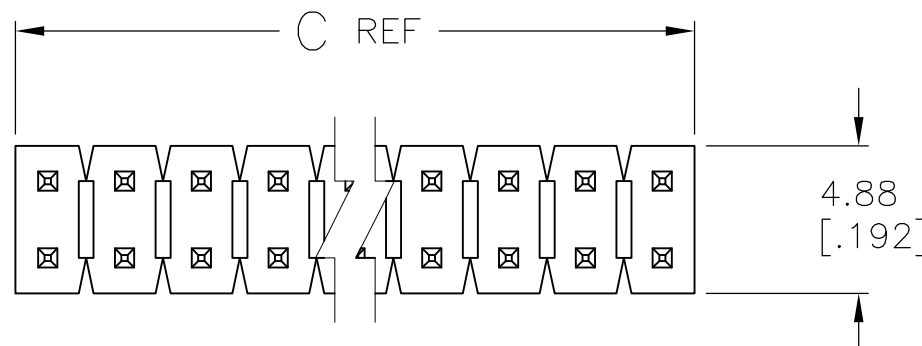
 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING

4 PLATING: 0.000127 [0.000005] GOLD ON CONTACT AREA,
.00254-0.00508 [0.00100-0.00200] MATTE TIN-LEAD
ON SOLDER TAIL, ALL OVER 0.00127 [0.00050] NICKEL.












5 HOUSING: LCP, COLOR-BLACK.
POST: COPPER ALLOY

6 PLATING: 0.000127 [.000005] GOLD ON CONTACT AREA,
.00254-.00508 [.000100-.000200] MATTE TIN
ON SOLDER TAIL, ALL OVER 0.00127 [.000050] NICKEL.

 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINIS



RECOMMENDED PC BOARD MOUNTING DIMENSIONS
FOR .063 [1.60] THICK PC BOARD AND
.012 [.305] STENCIL THICK

	101.19 [3.984]	99.06 [3.900]	39	80	9-146255-0
	98.65 [3.884]	96.52 [3.800]	38	78	8-146255-9
	96.11 [3.784]	93.98 [3.700]	37	76	8-146255-8
	93.57 [3.684]	91.44 [3.600]	36	74	8-146255-7
	91.03 [3.584]	88.90 [3.500]	35	72	8-146255-6
	88.49 [3.484]	86.36 [3.400]	34	70	8-146255-5
	85.95 [3.384]	83.82 [3.300]	33	68	8-146255-4
	83.41 [3.284]	81.28 [3.200]	32	66	8-146255-3
	80.87 [3.184]	78.74 [3.100]	31	64	8-146255-2
	78.33 [3.084]	76.20 [3.000]	30	62	8-146255-1
	75.79 [2.984]	73.66 [2.900]	29	60	8-146255-0
	73.25 [2.884]	71.12 [2.800]	28	58	7-146255-9
	70.71 [2.784]	68.58 [2.700]	27	56	7-146255-8
	68.17 [2.684]	66.04 [2.600]	26	54	7-146255-7
	65.63 [2.584]	63.5 [2.500]	25	52	7-146255-6
	63.09 [2.484]	60.96 [2.400]	24	50	7-146255-5
	60.55 [2.384]	58.42 [2.300]	23	48	7-146255-4
	58.01 [2.284]	55.88 [2.200]	22	46	7-146255-3
	55.47 [2.184]	53.34 [2.100]	21	44	7-146255-2
	52.93 [2.084]	50.80 [2.000]	20	42	7-146255-1
	50.39 [1.984]	48.26 [1.900]	19	40	7-146255-0
	47.85 [1.884]	45.72 [1.800]	18	38	6-146255-9
	45.31 [1.784]	43.18 [1.700]	17	36	6-146255-8
	42.77 [1.684]	40.64 [1.600]	16	34	6-146255-7
	40.23 [1.584]	38.10 [1.500]	15	32	6-146255-6
	37.69 [1.484]	35.56 [1.400]	14	30	6-146255-5
	35.15 [1.384]	33.02 [1.300]	13	28	6-146255-4
	32.61 [1.284]	30.48 [1.200]	12	26	6-146255-3
	30.07 [1.184]	27.94 [1.100]	11	24	6-146255-2
	27.53 [1.084]	25.40 [1.000]	10	22	6-146255-1
	24.99 [.984]	22.86 [.900]	9	20	6-146255-0
	22.45 [.884]	20.32 [.800]	8	18	5-146255-9
	19.91 [.784]	17.78 [.700]	7	16	5-146255-8
	17.37 [.684]	15.24 [.600]	6	14	5-146255-7
	14.83 [.584]	12.70 [.500]	5	12	5-146255-6
	12.29 [.484]	10.16 [.400]	4	10	5-146255-5
	9.75 [.384]	7.62 [.300]	3	8	5-146255-4
	7.21 [.284]	5.08 [.200]	2	6	5-146255-3
	4.67 [.184]	2.54 [.100]	1	4	5-146255-2
	2.13 [.084]	- [-]	0	2	5-146255-1
PLATING	C	B	A	NO. OF POSITIONS	PART NUMBER

OBSOLETE

OBSOLETE

OBSOLETE

	SUPERCEDED		24.99 [.984]	22.86 [.900]	9	20	1-146255-0
	OBSOLETE		22.45 [.884]	20.32 [.800]	8	18	146255-9
	SUPERCEDED		19.91 [.784]	17.78 [.700]	7	16	146255-8
	OBSOLETE		17.37 [.684]	15.24 [.600]	6	14	146255-7
	SUPERCEDED		14.83 [.584]	12.70 [.500]	5	12	146255-6
	SUPERCEDED		12.29 [.484]	10.16 [.400]	4	10	146255-5
	SUPERCEDED		9.75 [.384]	7.62 [.300]	3	8	146255-4
	SUPERCEDED		7.21 [.284]	5.08 [.200]	2	6	146255-3
	SUPERCEDED		4.67 [.184]	2.54 [.100]	1	4	146255-2
	SUPERCEDED		2.13 [.084]	- [-]	0	2	146255-1
		PLATING	C	B	A	NO. OF POSITIONS	PART NUMBER

OBSOLETE

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 5/8/95 T. HOFFMAN G. DUBNICZKI 10/24/95		 TE Connectivity	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC ± — 1 PLC ± — 2 PLC ± 0.51[.02] 3 PLC ± 0.127[.005] 4 PLC ± 0.013[.0005] ANGLES ± —		PRODUCT SPEC APPLICATION SPEC	
MATERIAL		FINISH		SIZE	GAGE CODE DRAWING NO.
		SEE TABLE		WEIGHT — CUSTOMER DRAWING	RESTRICTED TO — A1 00779 C-146255
				SCALE	4:1 SHEET 1 OF 1 REV —

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-146255-3](#)