
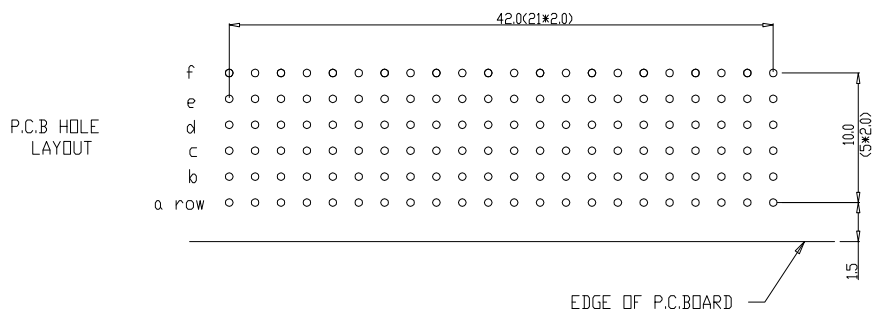


PERFORMANCE CHARACTERISTICS

1.5 A AT 20°C (FULLY LOADED)
 CURRENT RATING: 1 A AT 70°C (FULLY LOADED)
 RATED VOLTAGE: 500 V AC (CONT /CONT)
 OPERATING TEMPERATURE : -55°C TO 125°C
 CONTACT RESISTANCE : 20 m Ω MAX
 INSERTION FORCE: 0.75N MAX/CONT
 EXTRACTION FORCE : 0.15N MIN /CONT
 INSULATION RESISTANCE: 10⁴ MΩ MIN

NOTES

- LEAD FREE INDICATOR :LF=LEAD FREE
- PERFORMANCE LEVEL INDICATOR (REF DWG NO.BSC .201844.003)
- THIS PRODUCT IS CSA APPROVED. THIS PRODUCT IS UL RECOGNIZED.
- FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :BS.A.201572.001
- THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

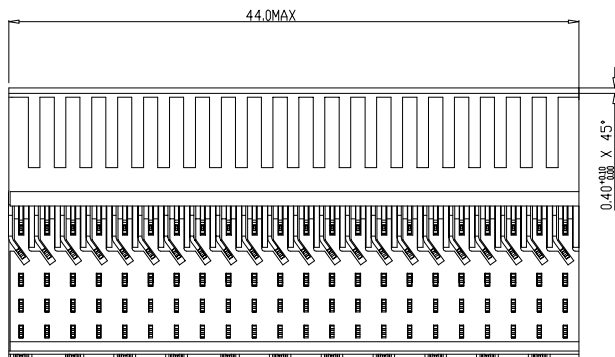

Material		Spec ref	
Mat code	Heattreat	Plating/Finish	Dr 15 10 97 Mfret
TOLERANCE			MM
1DEC ±0.2 1DEC 2DEC ±0.1 2DEC ANGLES ±1°HDEKEN			
Product family	Model Name	Model Revision	size A1 Scale 5.000
REL Level		ECN	
REV		REV	
rev	ecn no	dr	date
A	CONVERSION REVISION 01	KN	14-9-01
B	I05-0093	MINI	11-06-05
C	DG05-0278	kason	02-08-05
D	DG07-0362	kason	05/09/07
E	DG10-0110	NZ	05/30/10
Pro/E file		CAT.NO. HM2R70PA5108----	
CUSTOMER DRAWING		sheet 1 of 1	

This drawing is the property of FCI. It is to be used for manufacturing purposes only. No part of this drawing may be reproduced without the written permission of FCI. Copyright © 2011.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[HM2R70PA5108N9LF](#) [HM2R70PA5108E9LF](#)