

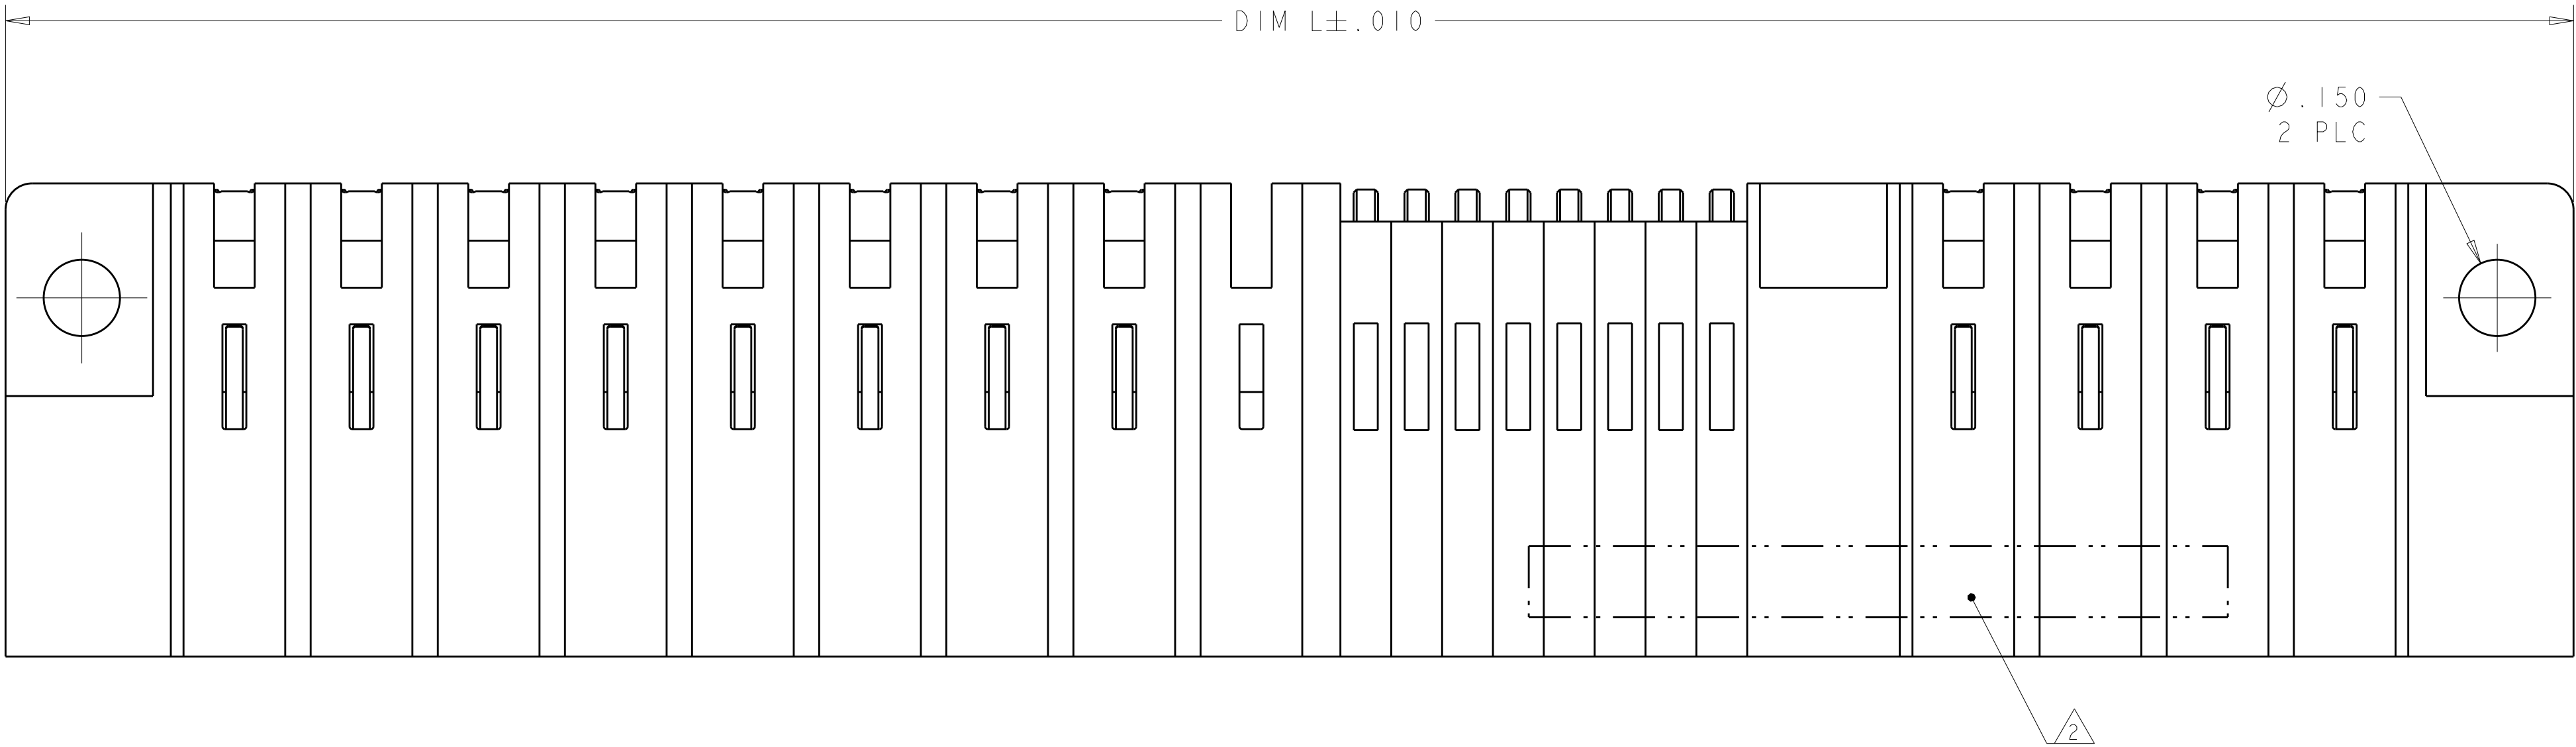
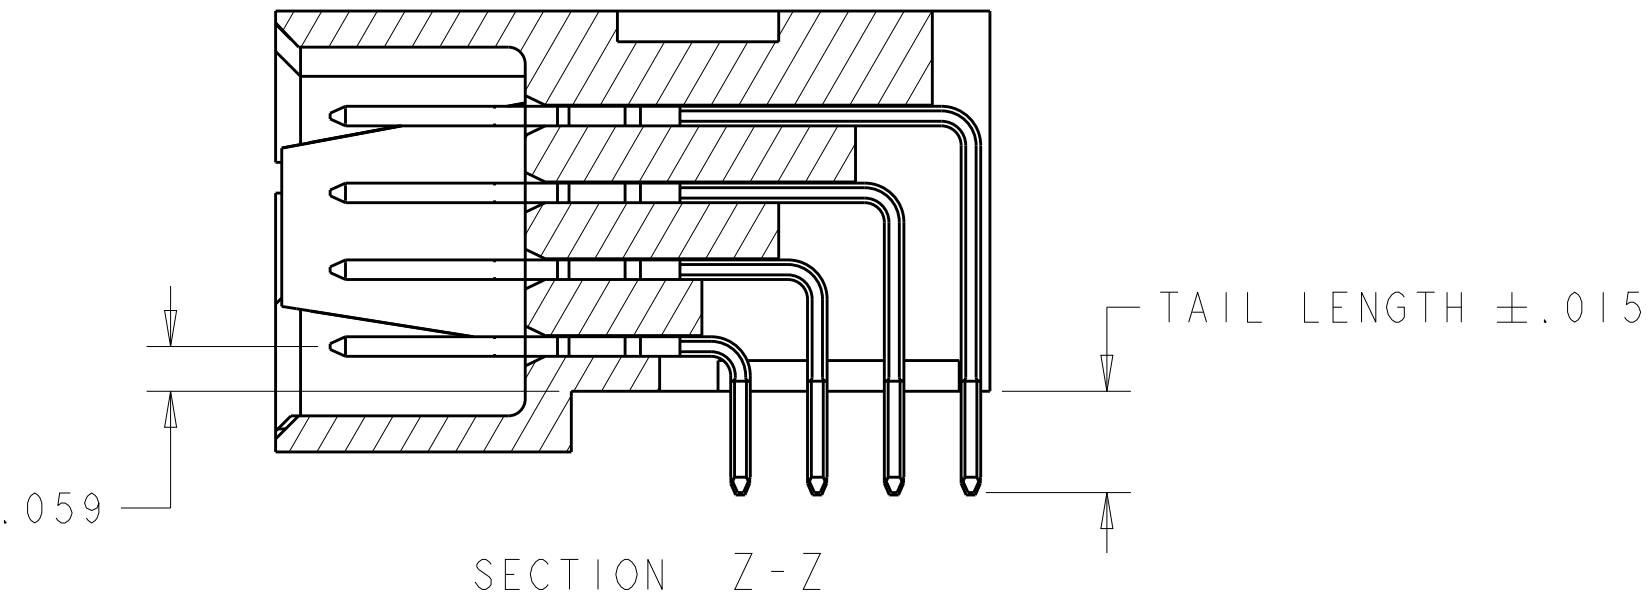


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
E6		REVISED FOR 1-2	16MAY2014	CZ	SZ
E7		ADD NEW DASH NUMBER 1-4	02JAN2015	CZ	SZ

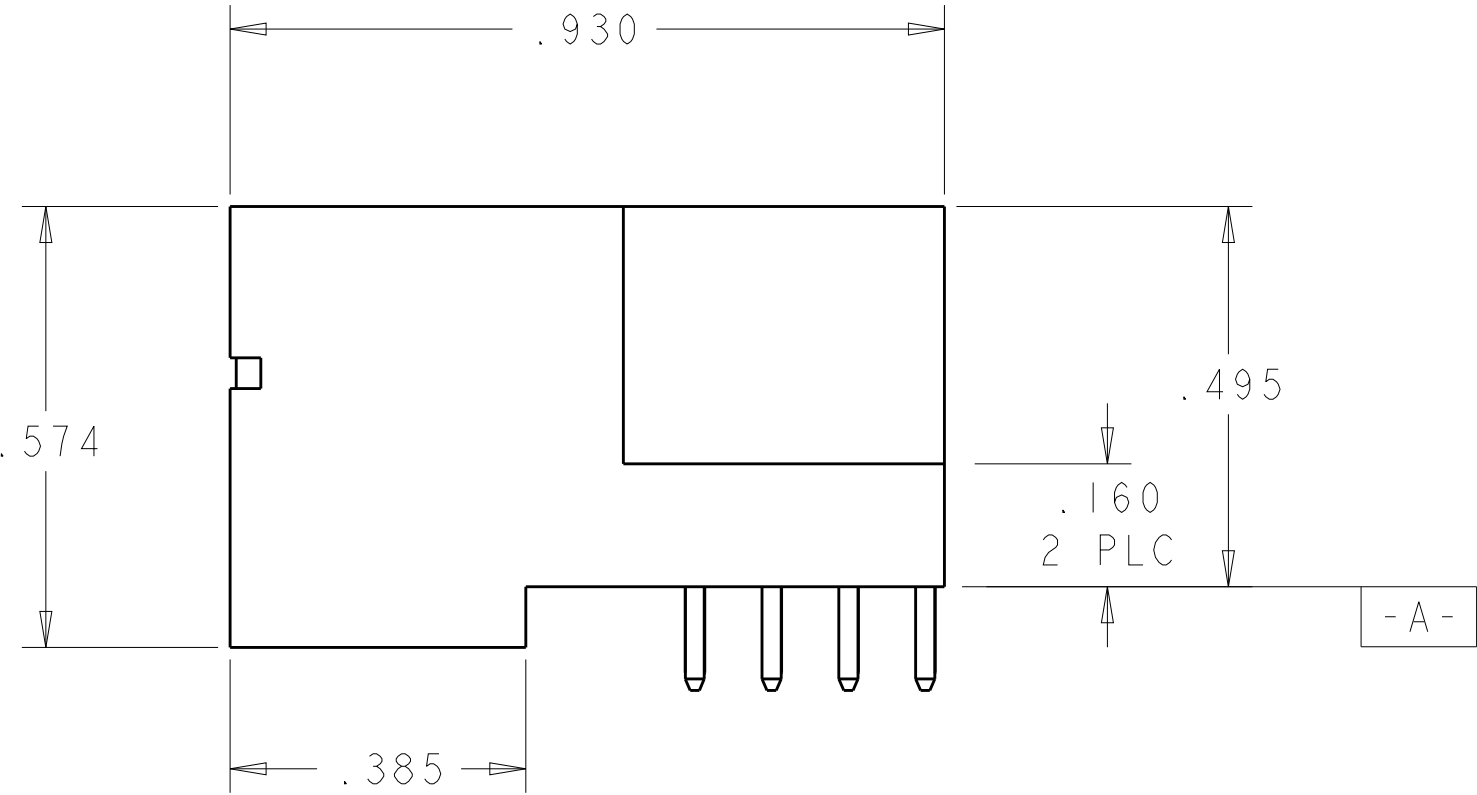


- 1 OPTIONAL CENTER MODULE
- 2 "AMP", PART NUMBER, AND DATE CODE TO BE MARKED IN AREA SHOWN. PARTS UNDER 2.00 LONG MAY BE MARKED ON BOTH SIDES.
- 3 MATERIAL: HOUSING - GLASS FILLED HIGH TEMP THERMO PLASTIC, UL94 V-0
SIGNAL CONTACT - COPPER ALLOY
POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
- 4 CONTACT PLATING: SIGNAL CONTACTS - .000050 MIN NI UNDER ALL.
.000030 MIN Au ON CONTACT AREA.
.000100 MIN Sn AT PCB INTERFACE.
POWER CONTACTS - .000050 MIN NI UNDER ALL.
.000030 MIN Au ON CONTACT AREA.
.000100 MIN Sn AT PCB INTERFACE.
- 5 MECHANICAL CONNECTOR KEEP OUT ZONE.
- 6 DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 7 PCB - ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 8 PCB - .0453 +/- .0010 DRILLED HOLES PLATES WITH .0003 MIN Sn OVER .001 TO .003 PLATING TO ACHIEVE A .040 DIA. HOLE.
- 9 VARIABLE DIMENSIONS SHOW ON VIEW (SHEET 5).

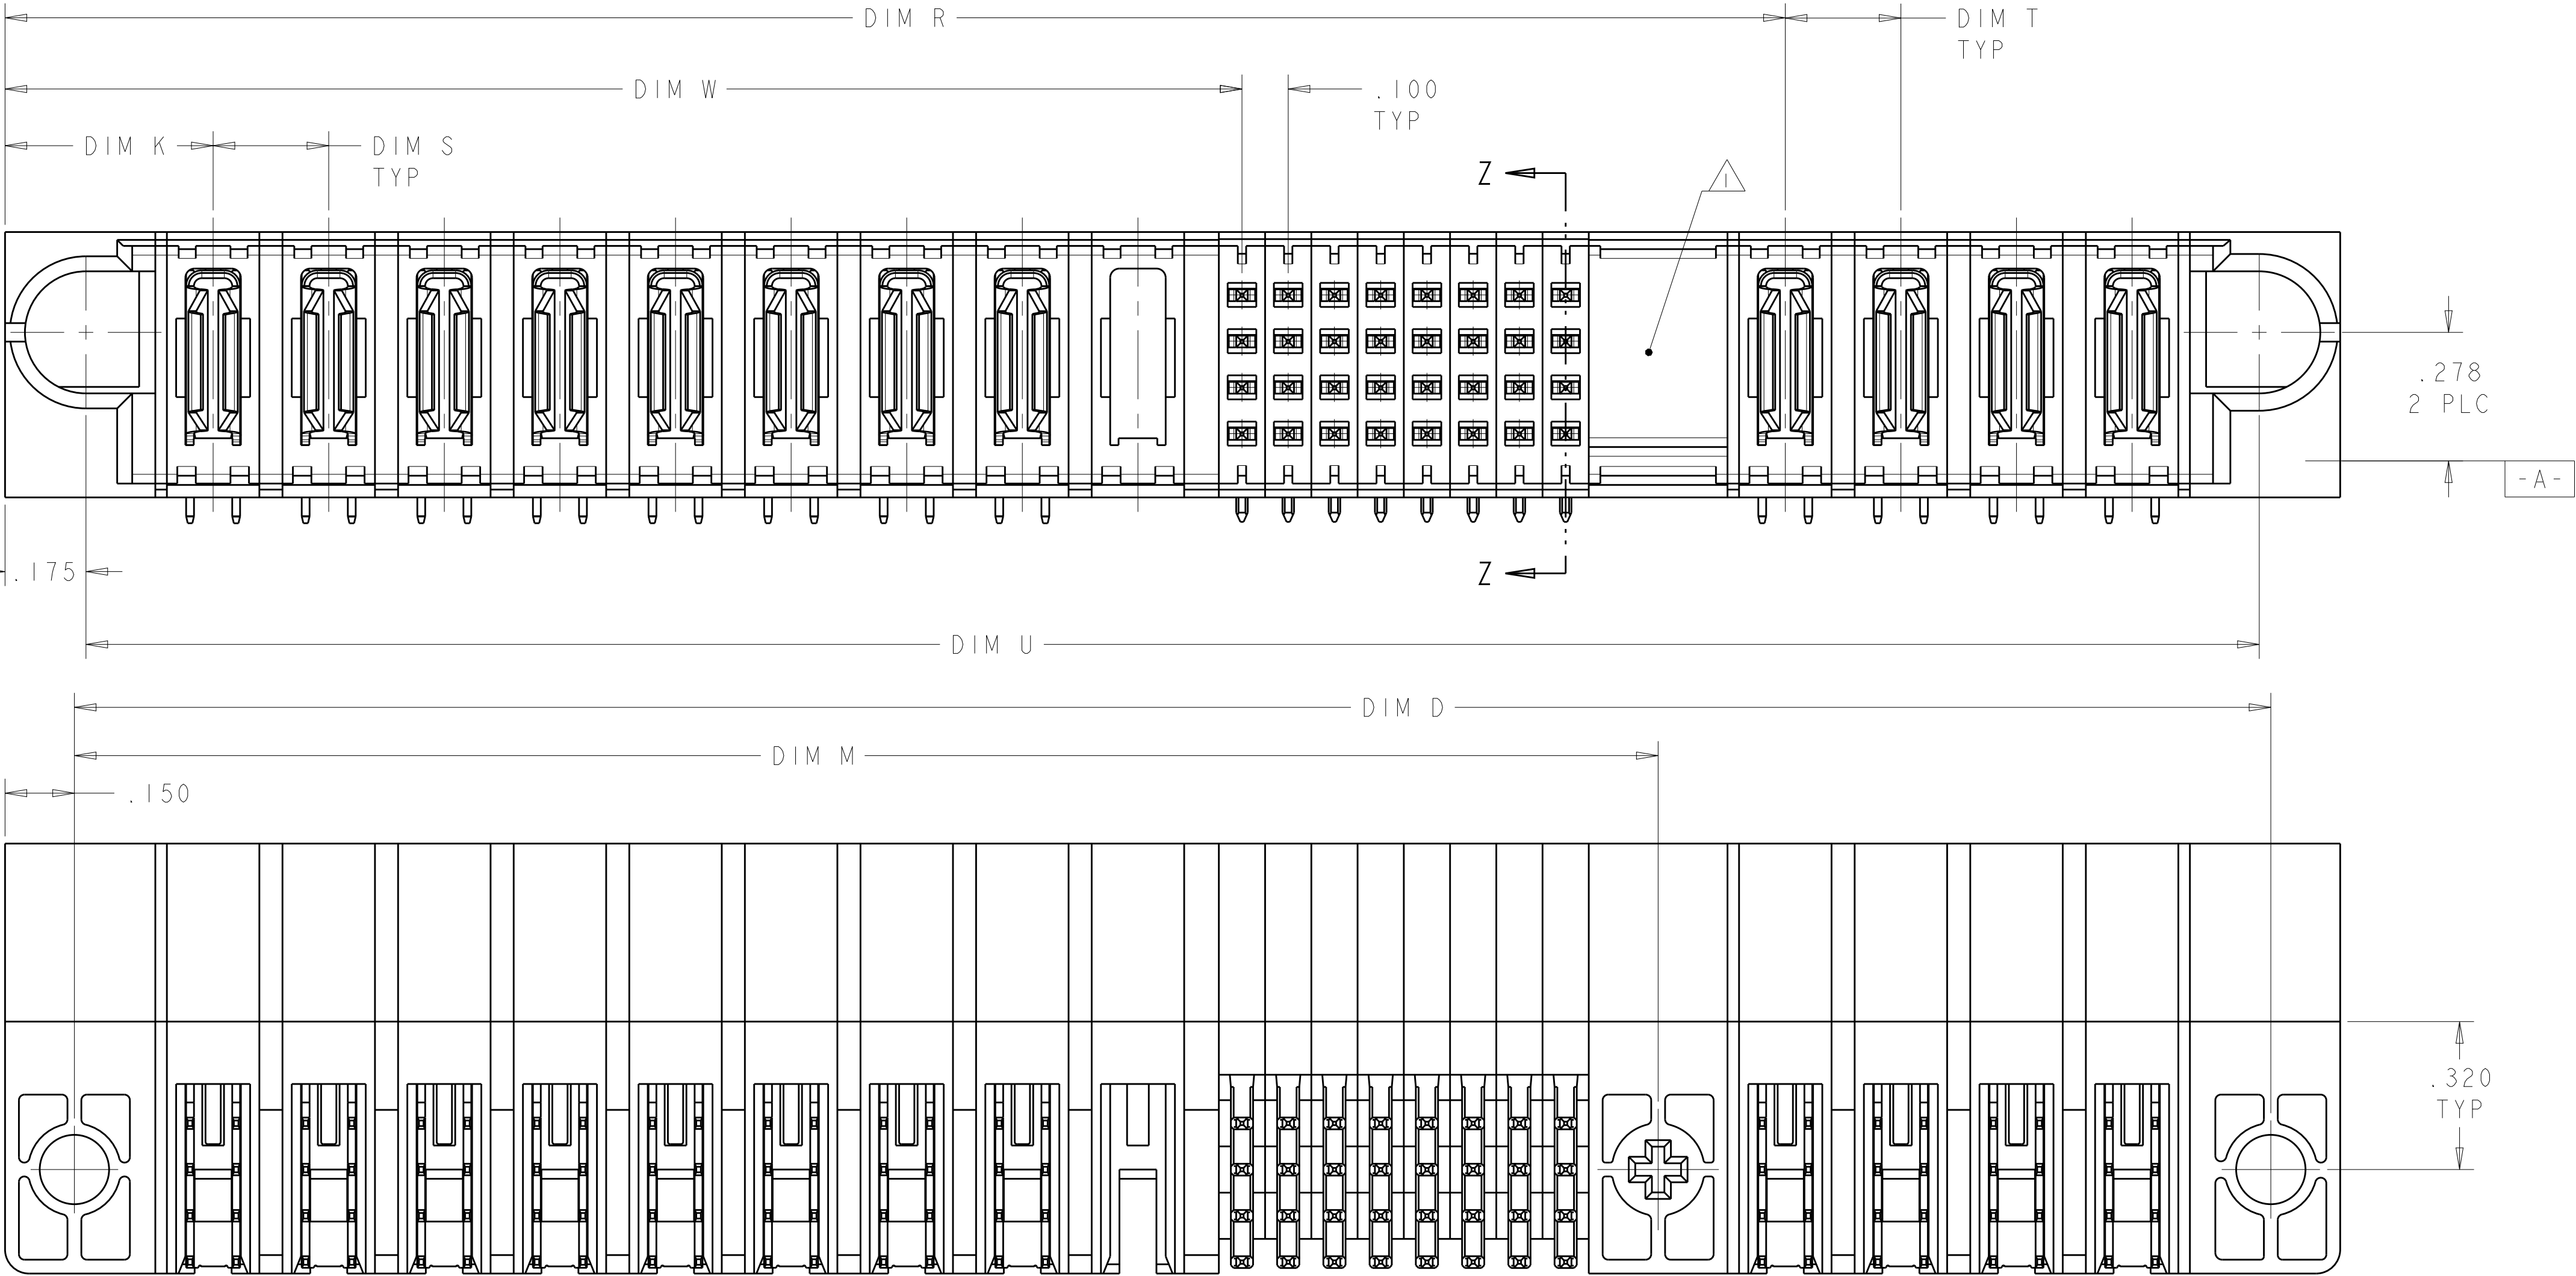


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI 13JUN05 CHK M. PERCHERKE 13JUN05	TE Connectivity	
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD M. PERCHERKE	NAME	RIGHT ANGLE HEADER W/GUIDES ASSEMBLY MULTI-BEAM XL (DUAL-BEAM POWER)
	0 PLC ±"	PRODUCT SPEC	SIZE	A1
	1 PLC ±.01	APPLICATION SPEC	CAGE CODE	-
	2 PLC ±.01	108-1973	DRAWING NO	C=6600132
	3 PLC ±.005	114-13038	RESTRICTED TO	-
	4 PLC ±.0020	WEIGHT	SCALE	4:1
	ANGLES ±2°	CUSTOMER DRAWING	SHEET	1 OF 7
	FINISH		REV	E7

PART NUMBER	ROWS		POWER			SIGNAL						POWER						
			P1	P2	P3	1	2	3	4	5	6	P4	P5	P6	P7	P8	P9	
6600132-2	D C B A					J	J	J	J	J	J							
						K	K	K	K	K	K							
						N	N	N	N	N	N							
						H	S	S	S	S	S							
3ACP + 24S + 6P																		

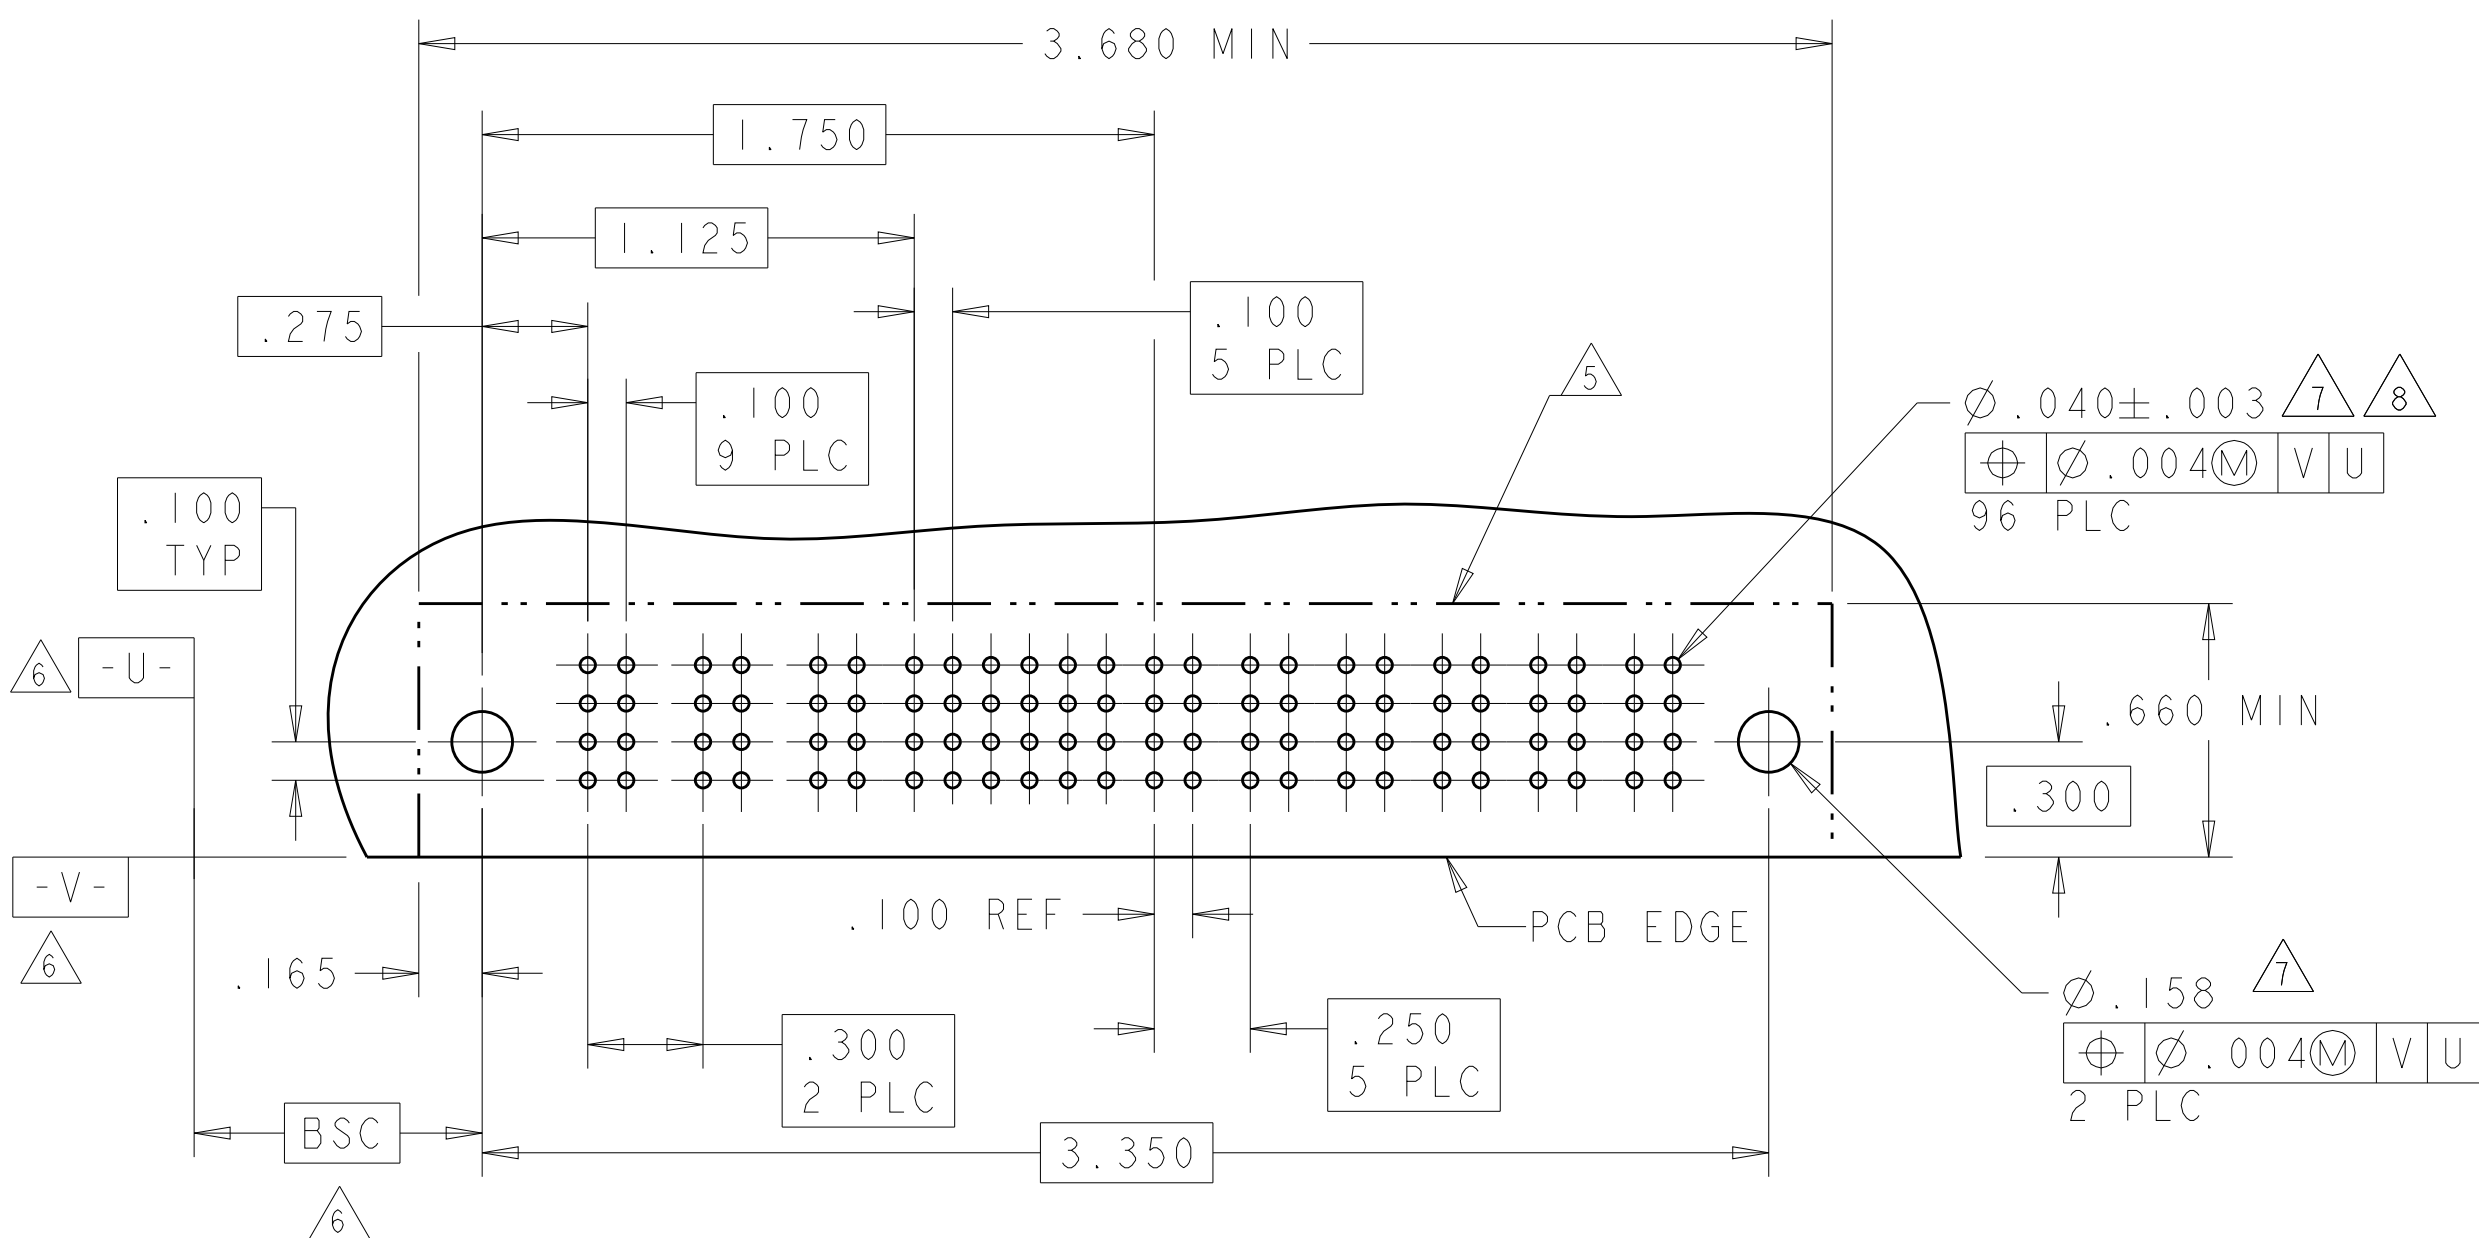



2.900	.250	.250	2.050	1.375	2.950	-	3.250	.450	4P + 24S + 4P	1-6600132-4
2.200	.250	.250	1.350	.875	2.250	-	2.550	.450	2P + 16S + 4P	1-6600132-2
1.900	.250	.250	1.550	.875	1.950	-	2.250	.450	2P + 24S + 2P	1-6600132-1
1.200	-	-	1.100	.625	1.250	-	1.550	.450	1P + 16S + 1P	1-6600132-0
2.200	.200	.200	1.725	1.025	2.250	-	2.550	.425	3P + 24S + 3P	6600132-9
3.550	.200		2.225	1.925	3.600	-	3.900	.500	7P + 8S + 7P	6600132-7
2.500	.250	.250	2.150	1.425	2.550	-	2.850	.450	4P + 24S + 2P	6600132-6
4.500	.250	.250	2.900	2.125	4.550	-	4.850	.450	7P + 28S + 7P	6600132-5
1.575	-	-	1.425	.700	1.625	-	1.925	.475	1P + 24S + 1P	6600132-4
1.575	.250	.250	1.425	.700	1.625	-	1.925	.475	1P + 24S + 1P	6600132-3
3.300	.300	.250	1.950	1.275	3.350	-	3.650	.475	3ACP + 24S + 6P	6600132-2
1.900	.250	.250	1.550	0.875	1.950	-	2.250	.450	2P + 24S + 2P	6600132-1
DIM U	S	T	R	W	D	M	L	K	DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN J. GRZYBOWSKI	13 JUN 05		
				CHK M. PERCHERRE	13 JUN 05	 TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		EXPD M. PERCHERRE		NAME	RIGHT ANGLE HEADER W/GUIDES ASSEM MULTI-BEAM XL (DUAL-BEAM POWER)
		0 PLC ±.1		PRODUCT SPEC			
		2 PLC ±.01		108-1973			
		3 PLC ±.005		APPLICATION SPEC			
ANGLES ±.0°		114-13038		WEIGHT			
MATERIAL	FINISH					SIZE	CAGE CODE
-	-			CUSTOMER DRAWING		DRAWING NO	RESTRICTED TO
						A1	-
						SCALE	4:1
						SHEET	2
						OF	7
						REV	E7

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-


PART NUMBER	ROWS		POWER	SIGNAL						POWER	
			P1	1	2	3	4	5	6	P2	
6600132-3	D C B A		PS	J	J	J	J	J	J	PS	
				K	K	K	K	K	K		
				N	N	G	G	N	G		
				S	S	H	S	S	S		
IP + 24S + IP											

PART NUMBER	ROWS		POWER	SIGNAL						POWER	
			P1	1	2	3	4	5	6	P2	
6600132-4	D C B A		PS	J	J	J	J	J	J	PS	
				K	K	K	K	K	K		
				N	N	N	G	N	N		
				S	S	S	S	S	S		
IP + 24S + IP											

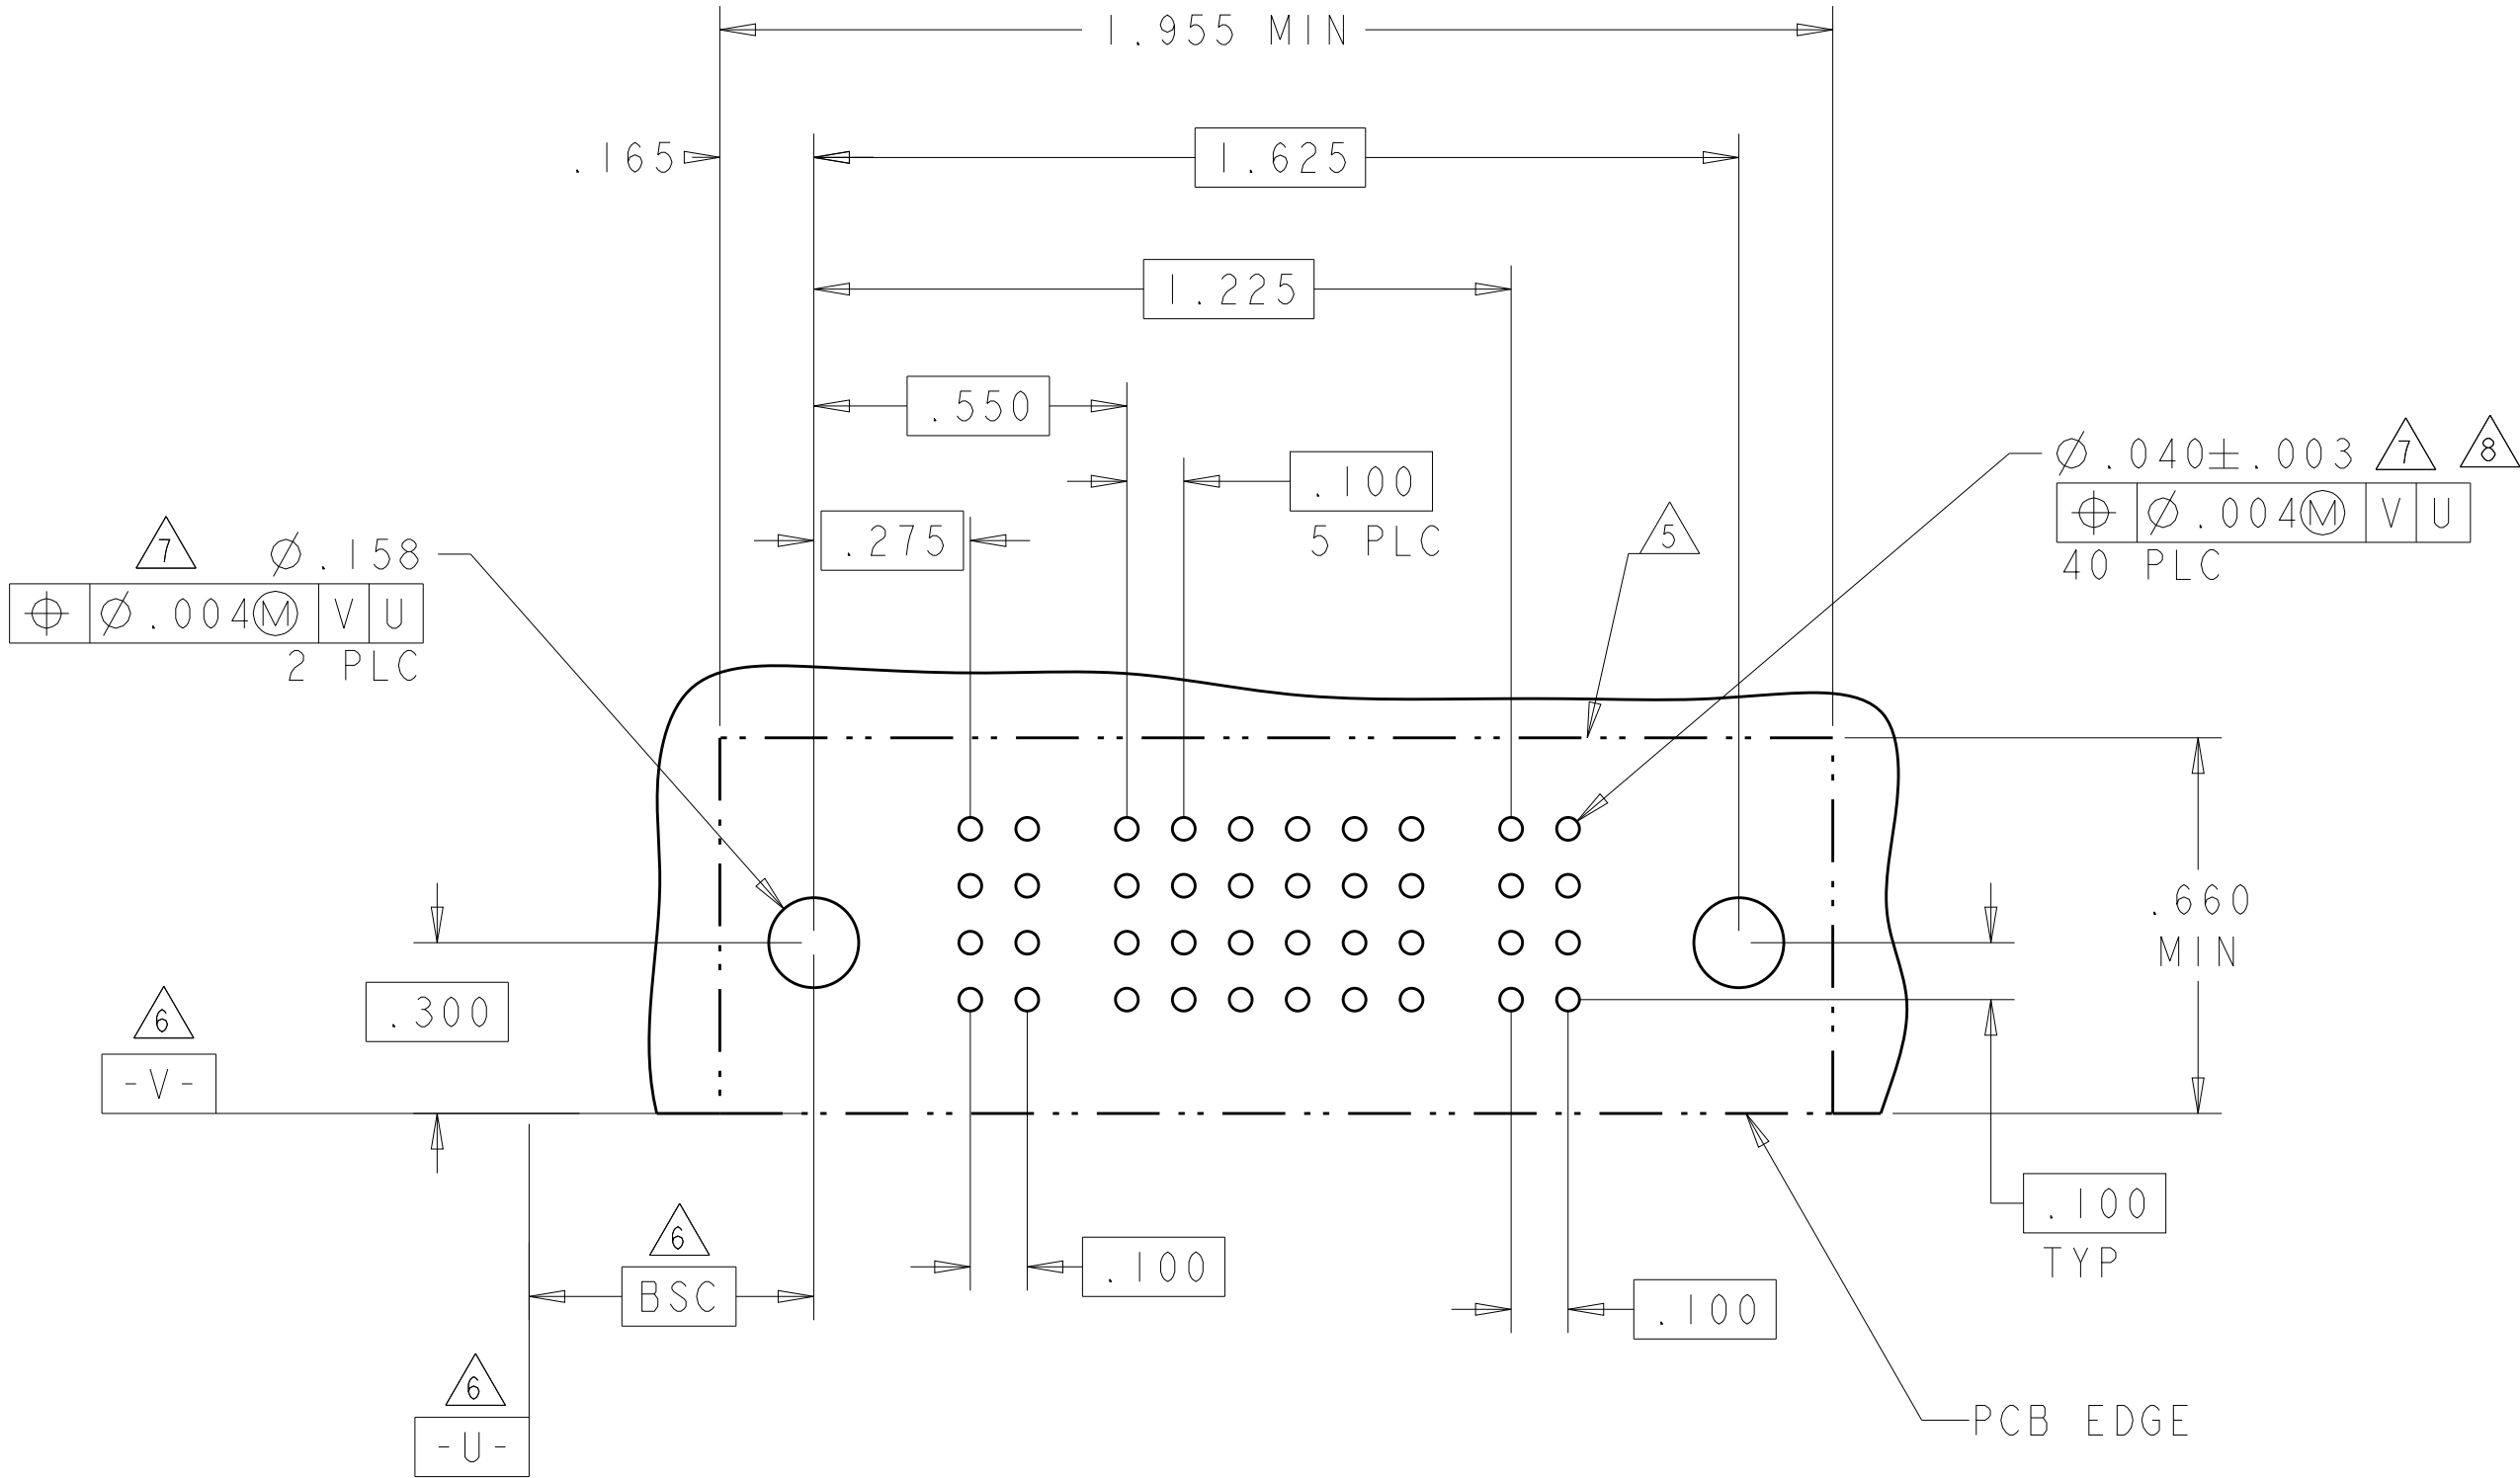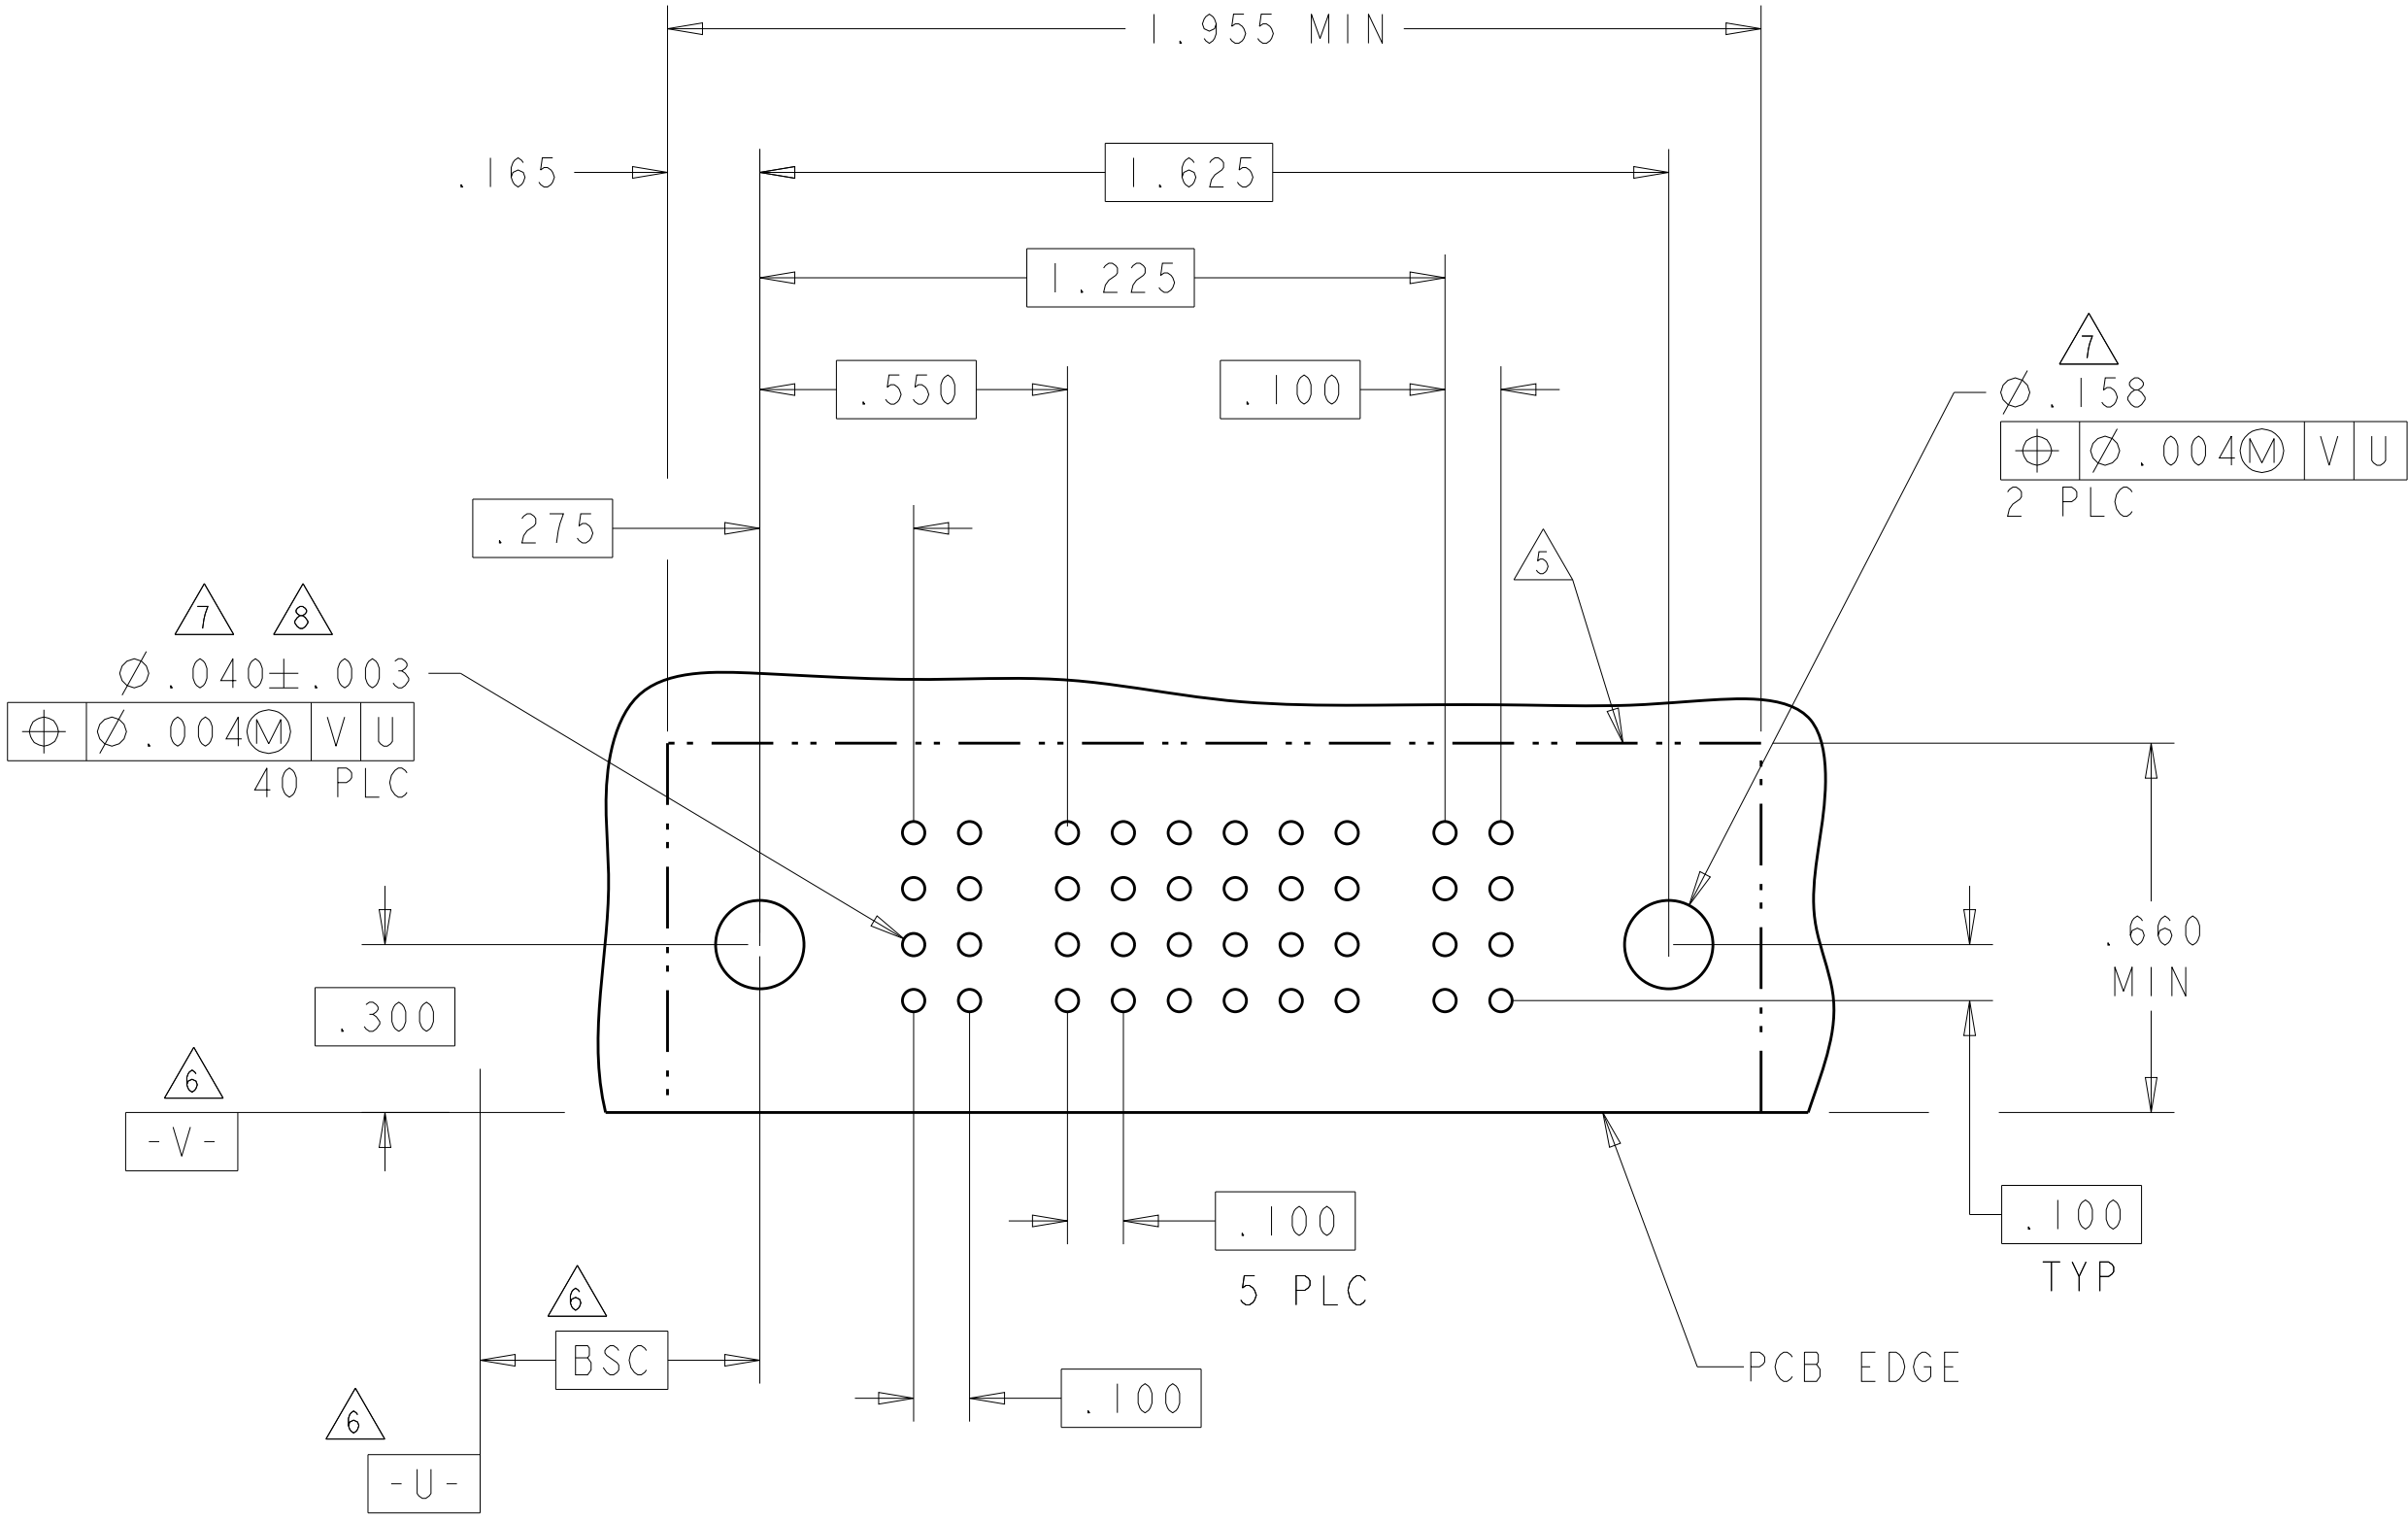

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER							SIGNAL							POWER							
			P1	P2	P3	P4	P5	P6	P7	1	2	3	4	5	6	7	P8	P9	P10	P11	P12	P13	P14	
6600132-5	D C B A		PS	PS	PS	PS	PS	PS	J	J	J	J	J	J	J	PS	PS	PS	PS	PS	PS	PS		
									K	K	K	F	K	K	K									
									N	N	N	G	N	N	N									
									S	S	S	S	S	S	S									
7P + 28S + 7P																								

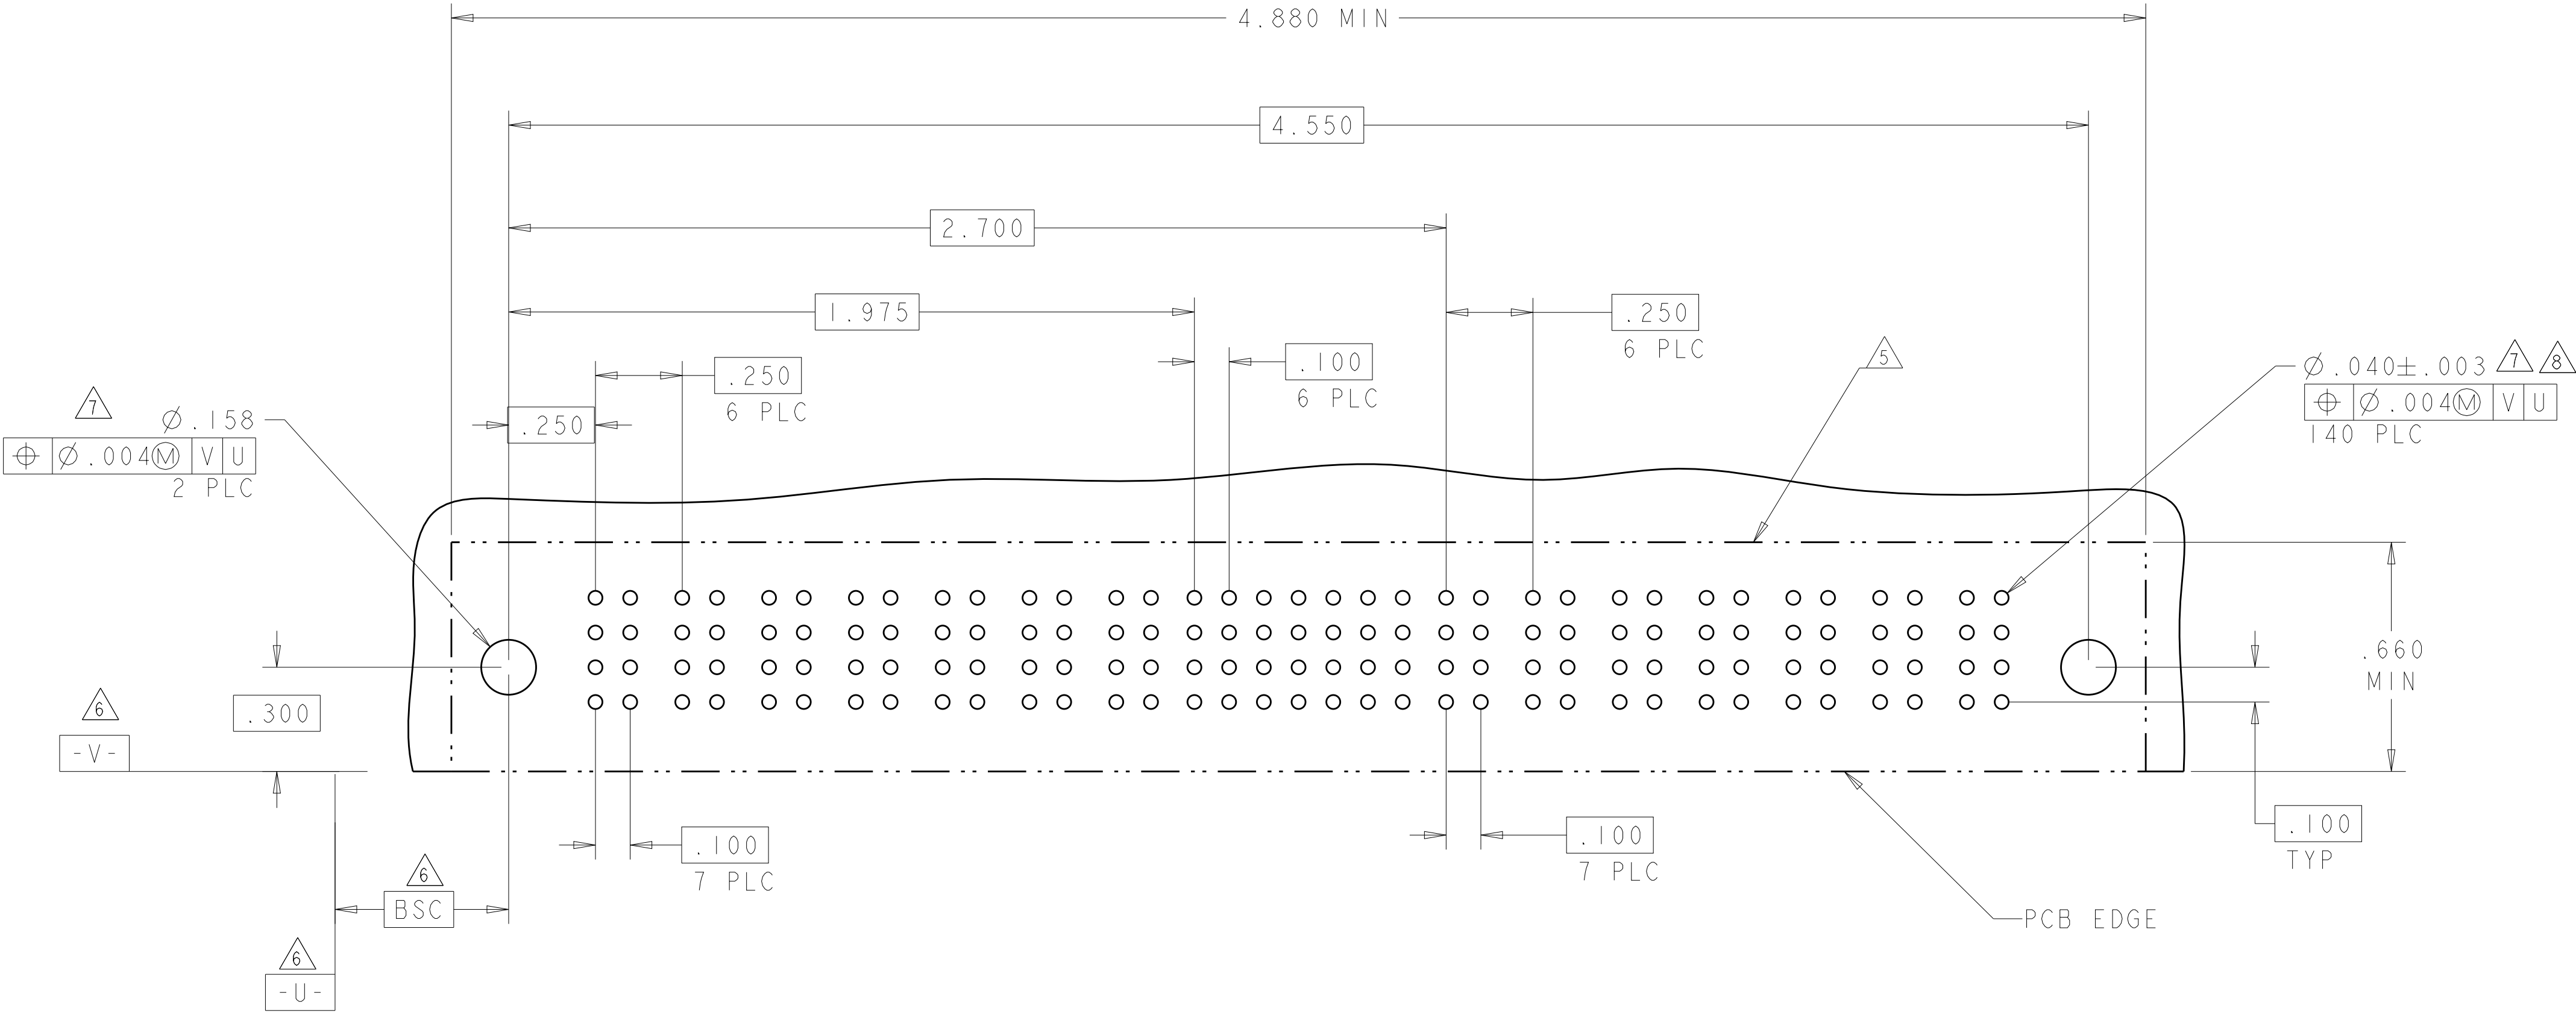

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

R. GRZYBOWSKI

13JUN05

CHK

M. PERCHERKE

13JUN05

APVD

M. PERCHERKE

-

DIMENSIONS:

INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.01

1 PLC ±.01

2 PLC ±.01

3 PLC ±.005

4 PLC ±.0020

ANGLES ±2°

FINISH

MATERIAL

-

-

CUSTOMER DRAWING

SCALE 4:1

SHEET 4 OF 7

REV E7

TE Connectivity

RIGHT ANGLE HEADER W/GUIDES ASSEMBLY

MULTI-BEAM XL

(DUAL-BEAM POWER)


SIZE A1

CAGE CODE


DRAWING NO


RESTRICTED TO


PART NUMBER	ROWS		POWER							SIGNAL		POWER								
			P1	P2	P3	P4	P5	P6	P7	1	2	P8	P9	P10	P11	P12	P13	P14		
6600132-7	D C B A		PS		PS		PS		PS	J	J	PS	PS	PS	PS	PS	PS			
										K	K									
										N	N									
										H	S									
7P + 8S + 7P																				

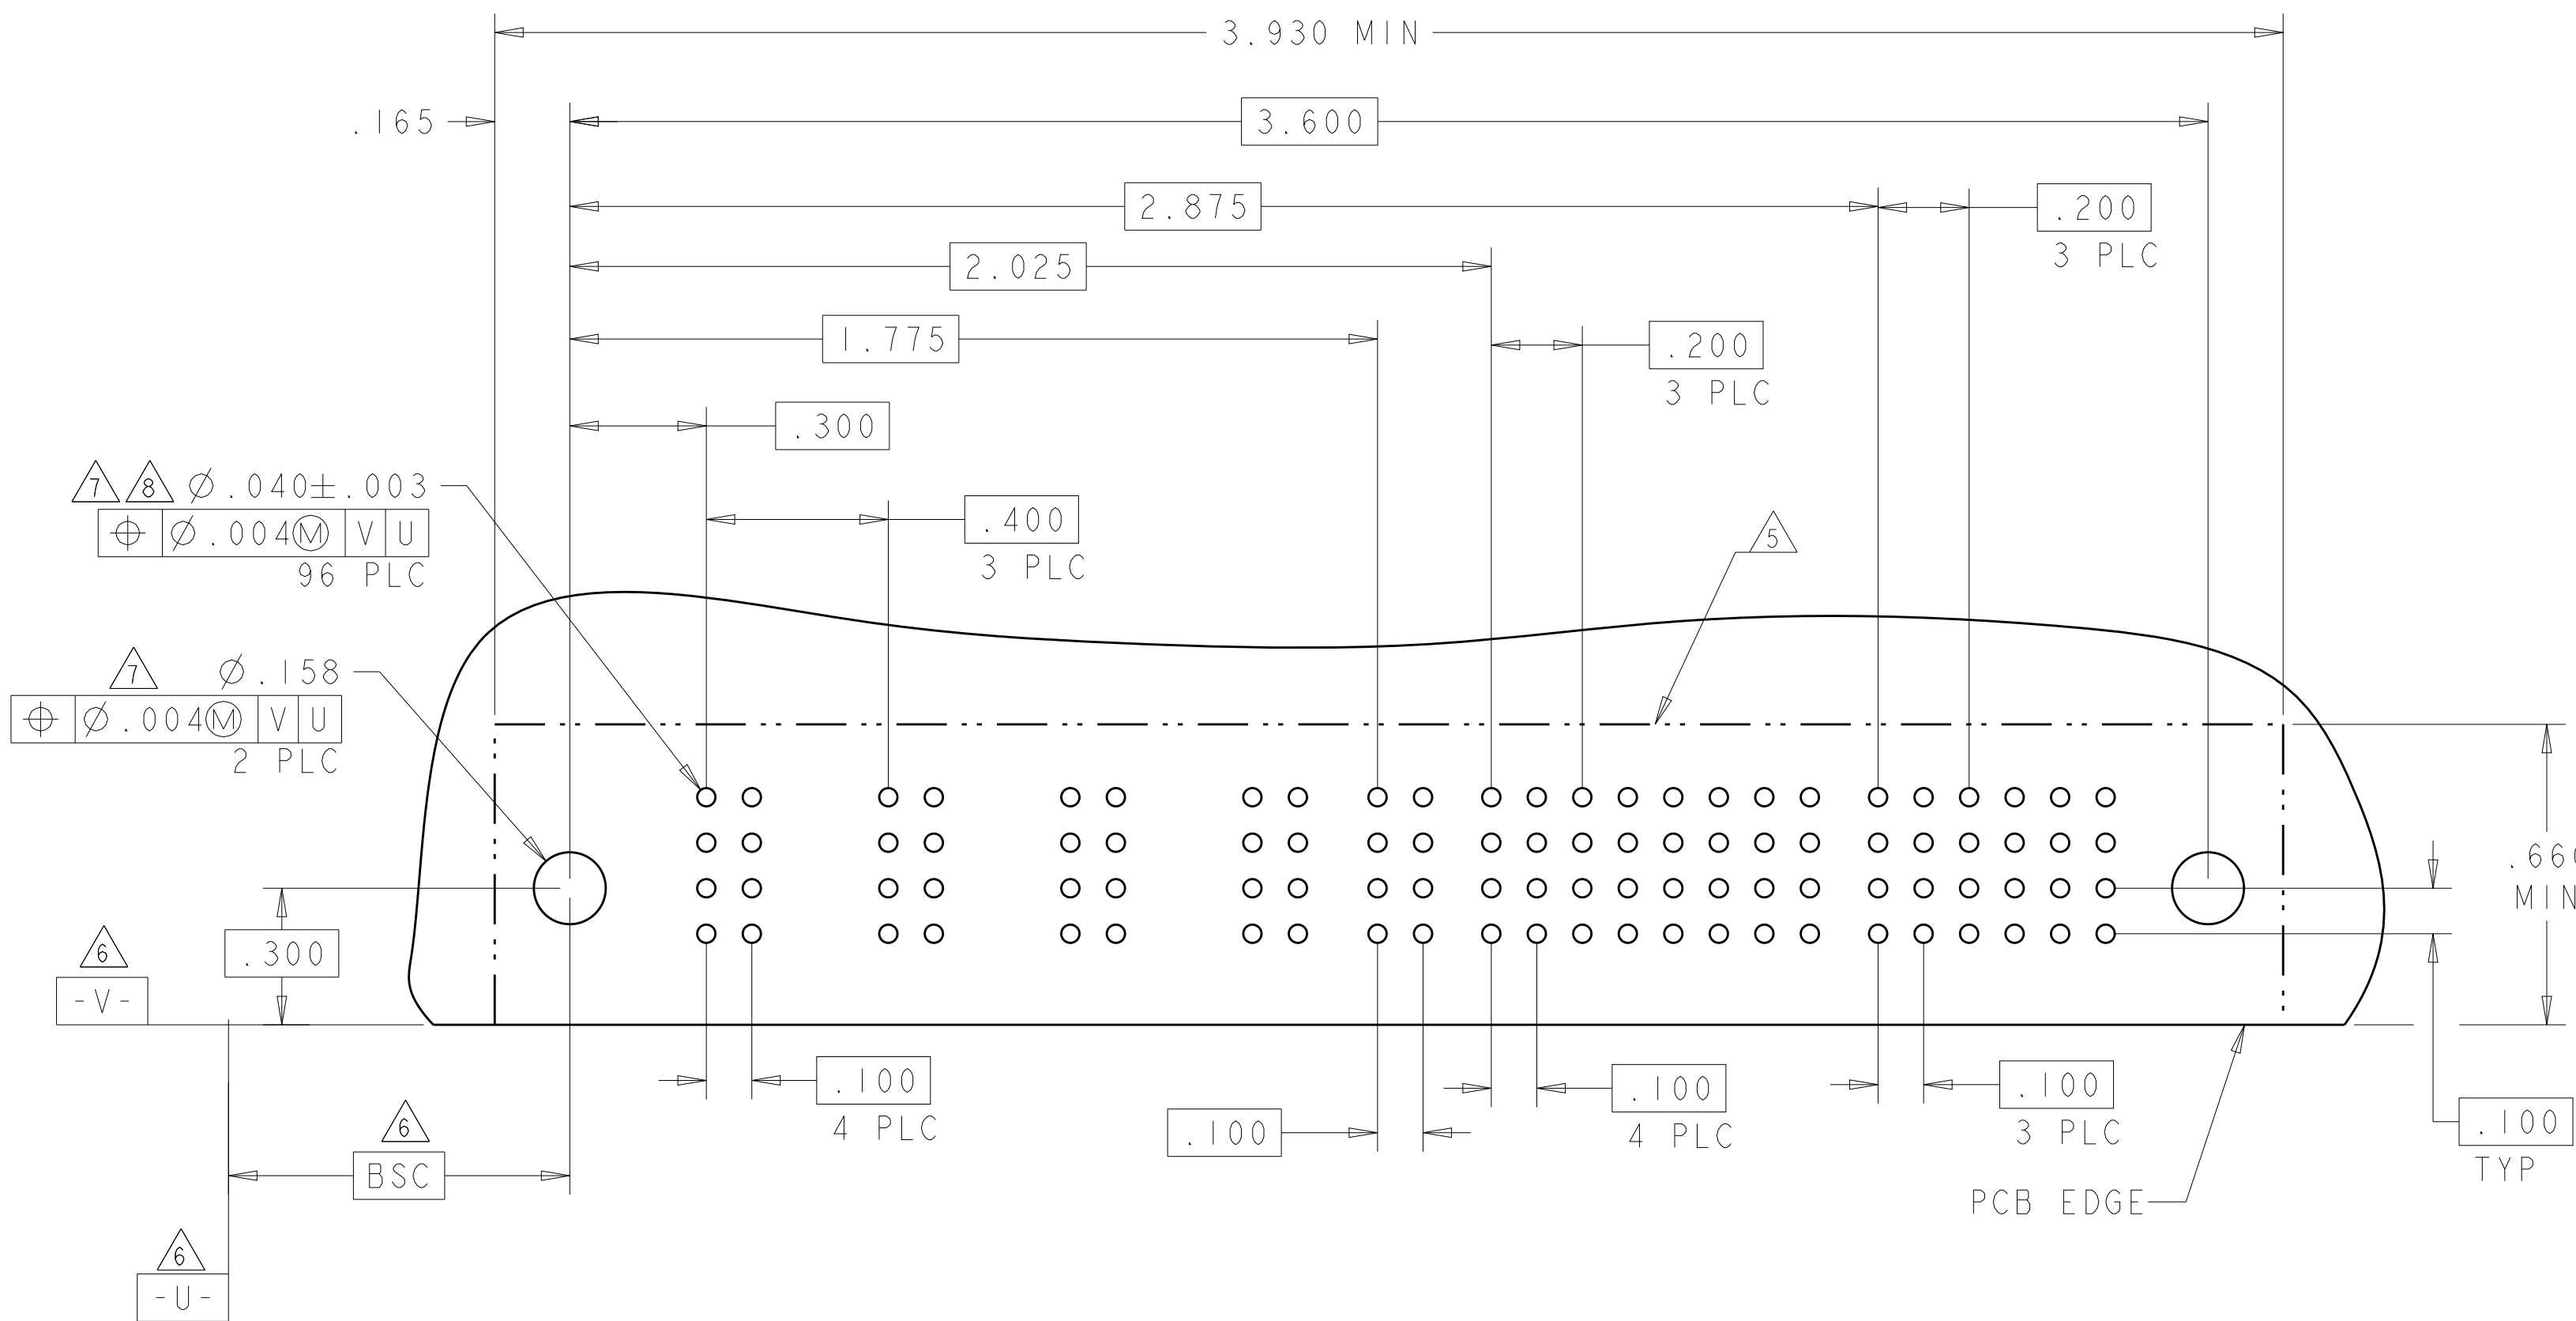4805 (3/13)

NO CONTACT LOADED

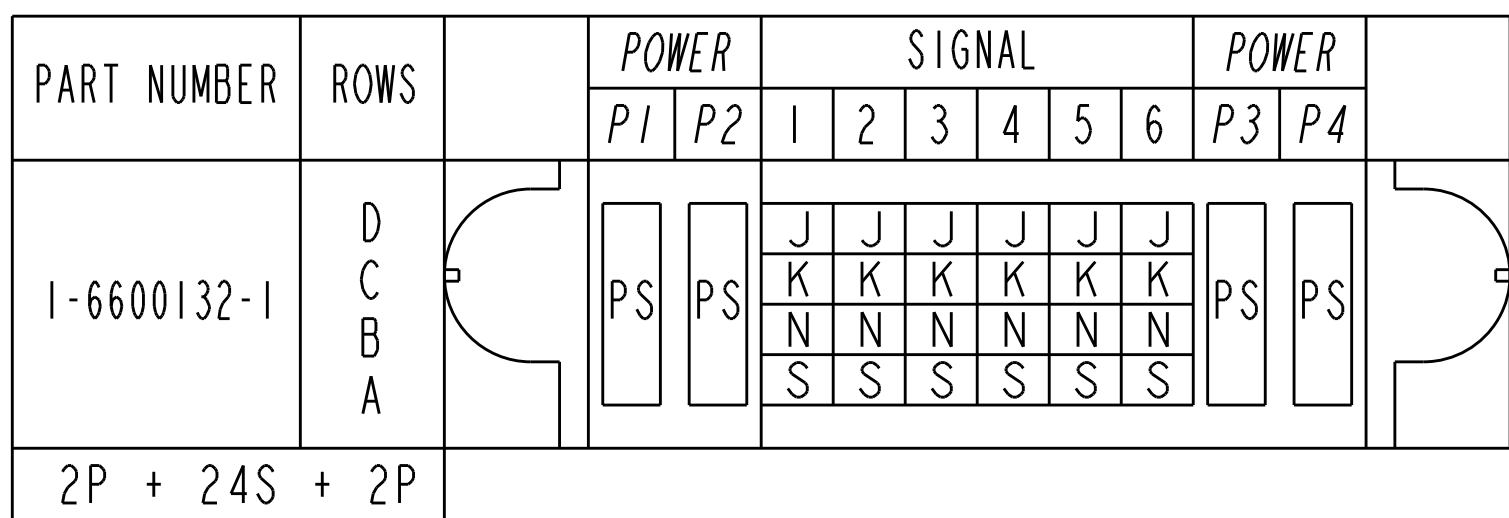

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG. 13JUN05 CHG. M. PERCHERNE APPROV. M. PERCHERNE 13JUN05		 TE Connectivity	
DIMENSIONS: INCHES 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PL/C ±.01 1 PL/C ±.01 2 PL/C ±.005 3 PL/C ±.0020 ANGLES ±.0°		NAME: RIGHT ANGLE HEADER W/GUIDES ASSEMBLY MULTI-BEAM XL (DUAL-BEAM POWER)	
MATERIAL: - FINISH: -		PRODUCT SPEC: 108-1973 APPLICATION SPEC: 114-13038 WEIGHT: -		SIZE: A1 CAGE CODE: - DRAWING NO: C=6600132 RESTRICTED TO: -	
CUSTOMER DRAWING		SCALE: 4:1		SHEET 6 OF 7 REV E7	

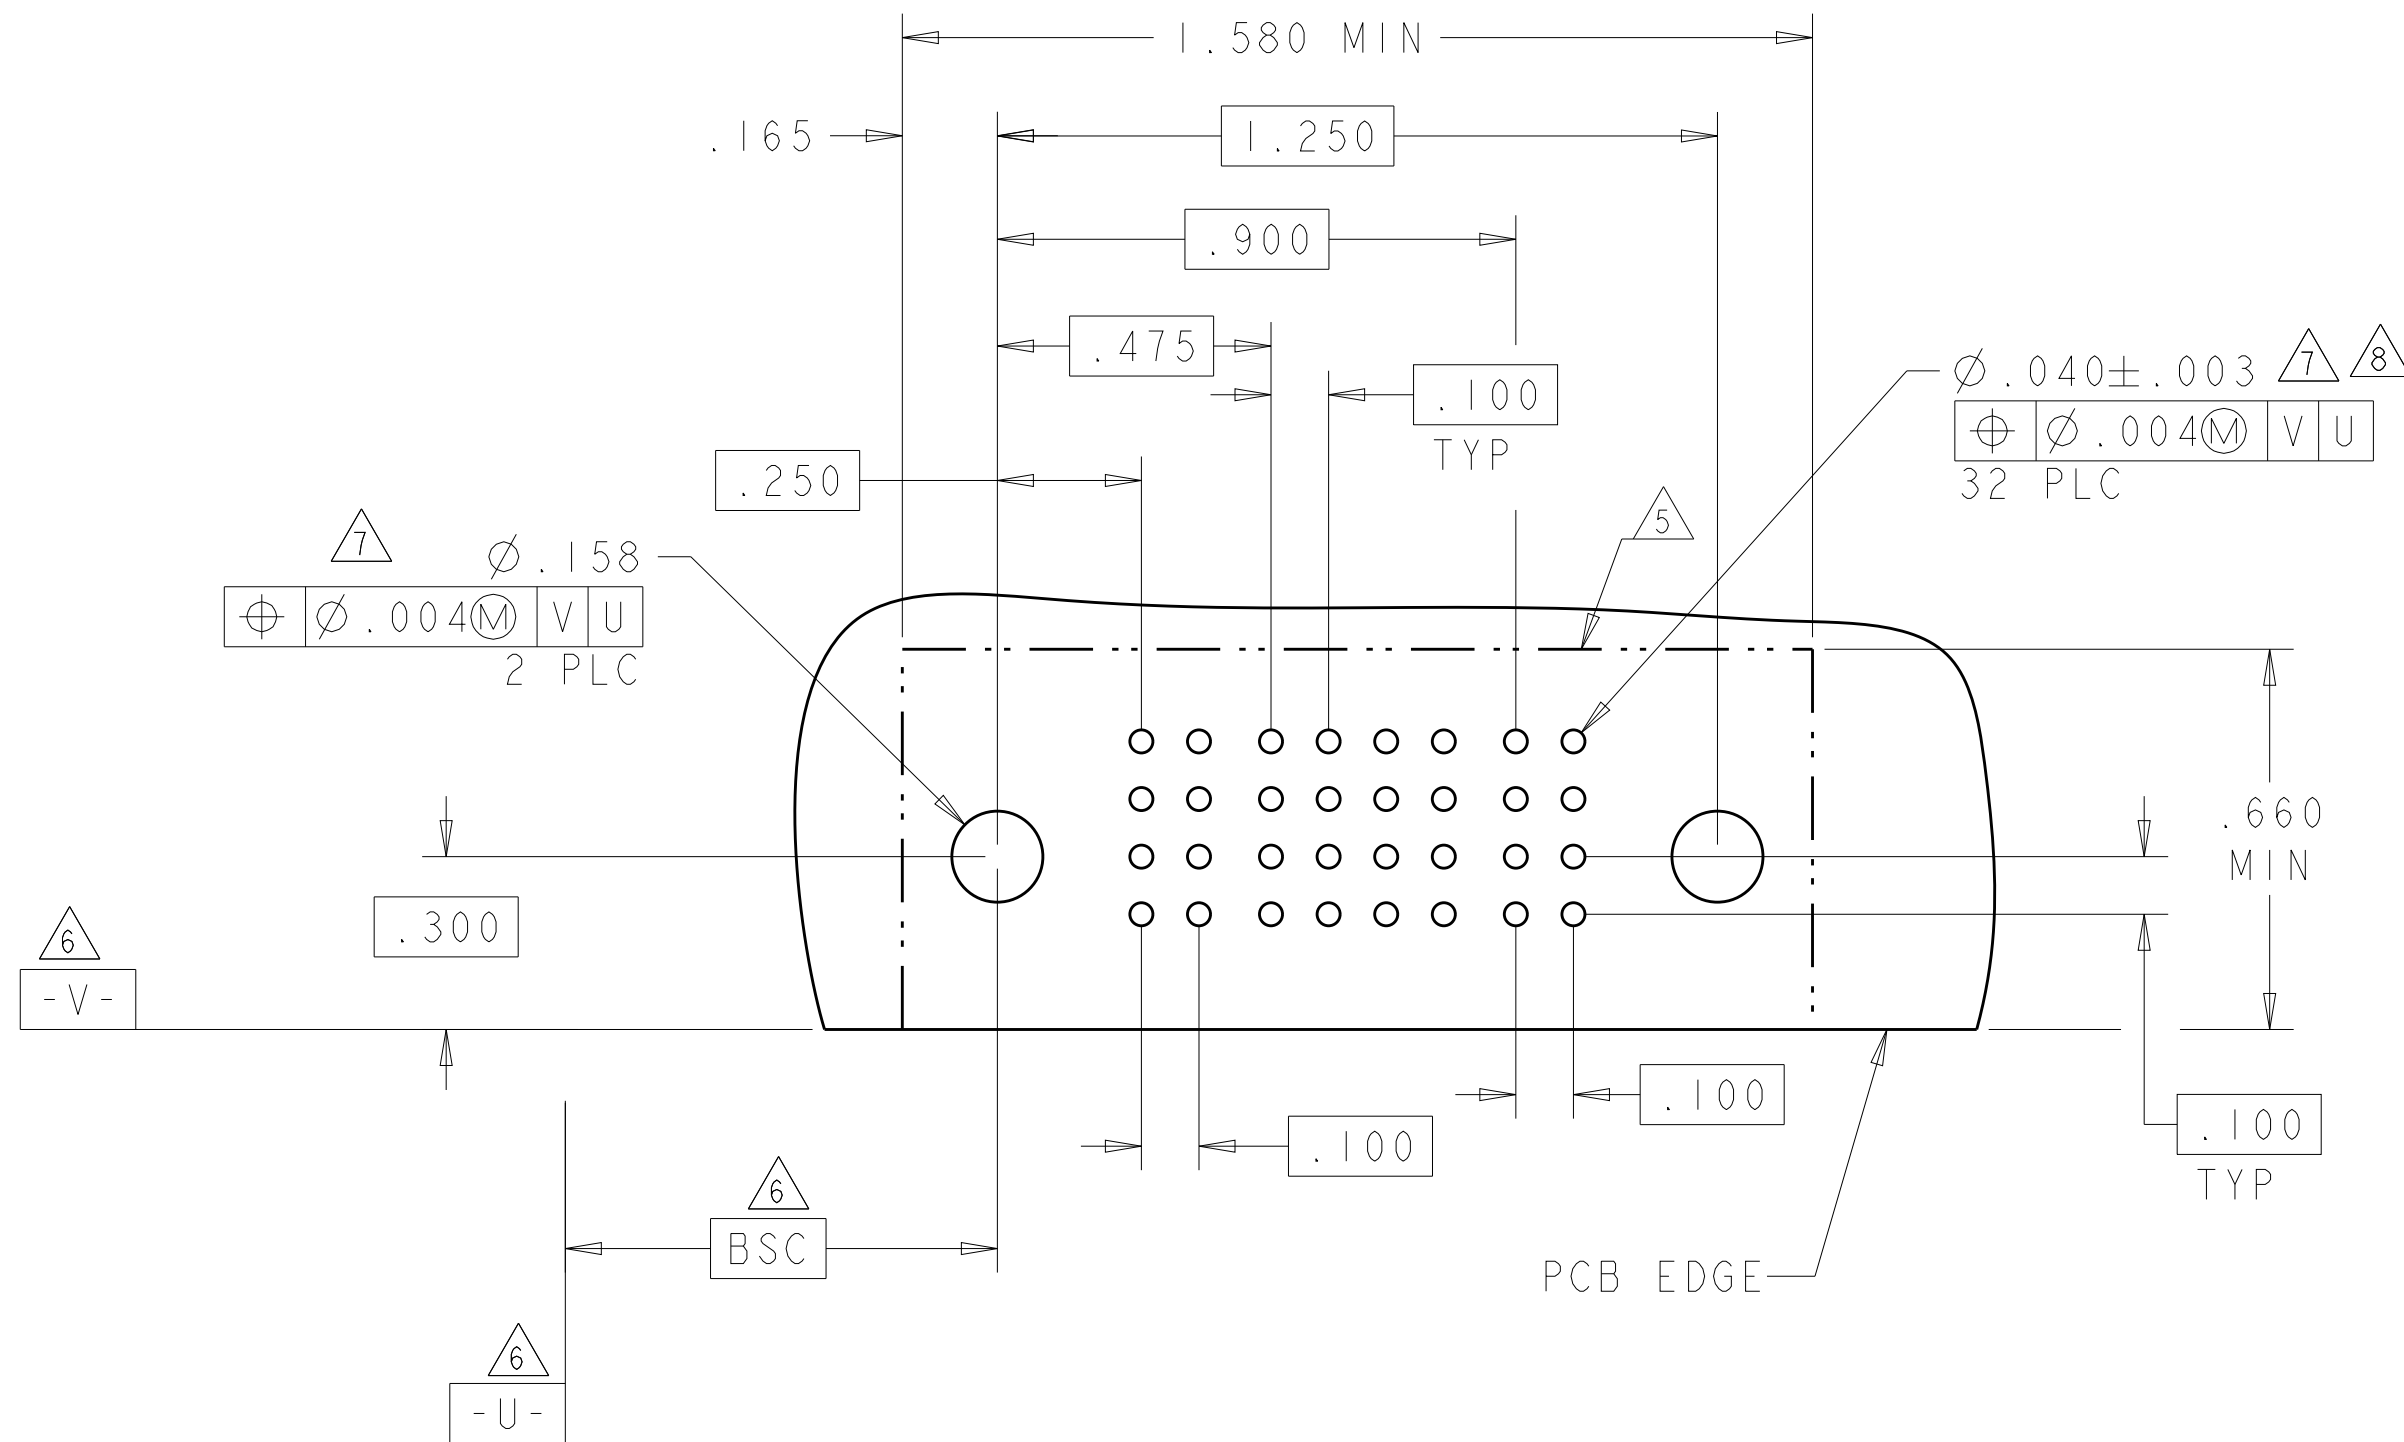[illegible]

4805 (3/13)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-6600132-0](#)