


Models 72915
2mm Sheathed Jack to 2mm Unsheathed Plug Adapter

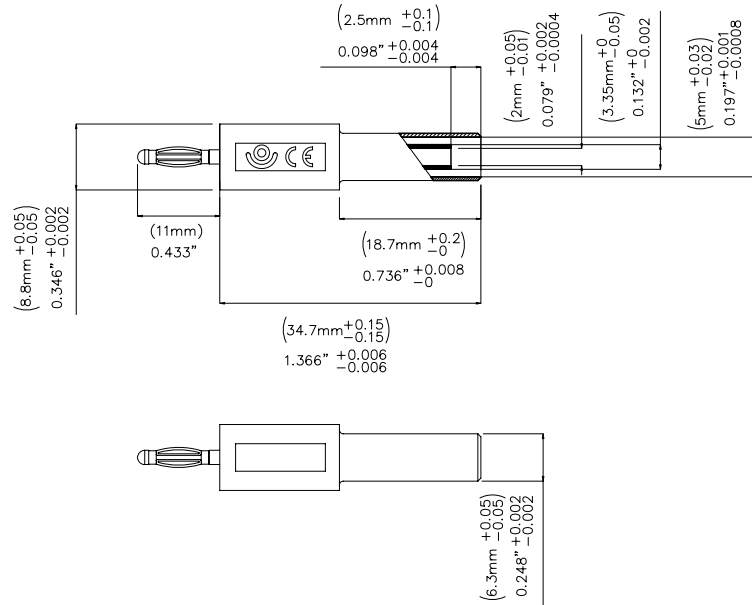

Features

- 2mm sheathed jack to 2mm unsheathed plug adapter.
- Accepts 2mm safety-sheathed banana plugs

Materials

- Insulation: Polyamide
- Plug body: Nickel plated Brass
- Contact Spring: Nickel plated Beryllium copper.
-

Ordering Information

Model: 72915-Color Sold in packages of 10 pieces
Available colors: Black (-0) or Red (-2)

Specifications

| | |
|----------------|-------------------|
| Max Current | Max. 10A |
| Max Voltage | 33 V AC / 70 V DC |
| Temperature | -20° C + 80° C |
| Max Resistance | Less than 0 .8 mΩ |

Rating: *hands free testing* in controlled environment: 70Vrms max. For CE compliance: Not intended for hand-held use at voltages above 33Vrms/70Vdc

USA: Sales: 800-490-2361 Technical Support: 800-241-2060 Fax: 888-403-3360

Europe: 31-(0) 40 2675 150 **International:** 425-446-5500

e-mail: technicalsupport@pomonatest.com

Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pomona:

[72915-2](#) [72915-0](#)