

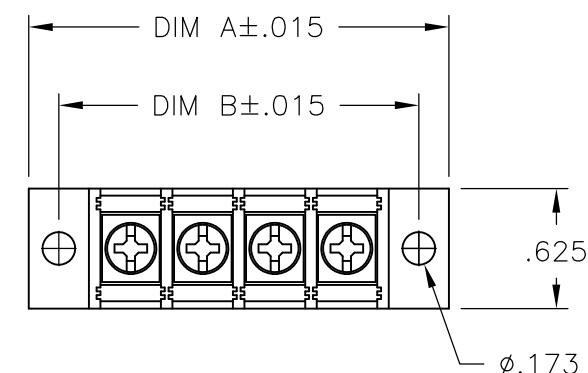
THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

(C) COPYRIGHT - By -

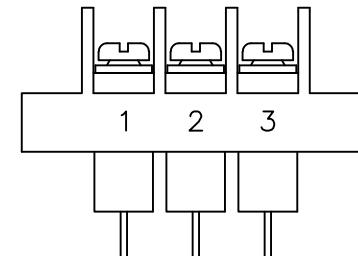
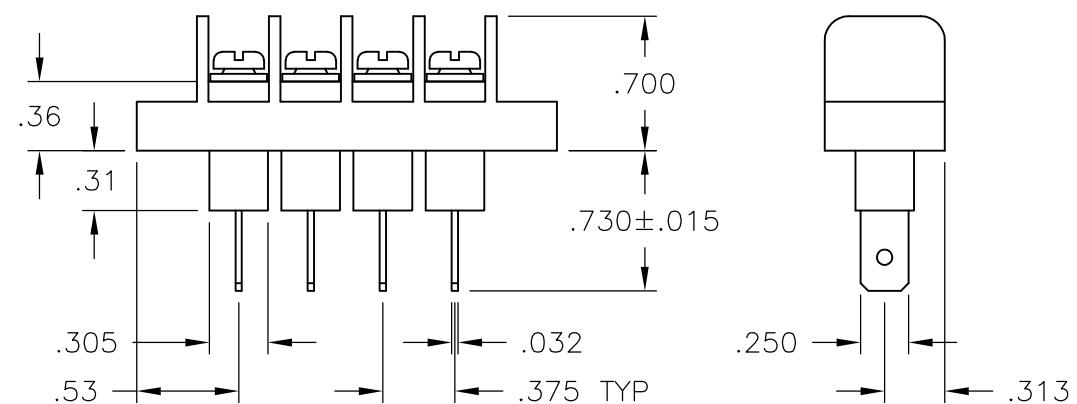
LOC	DIST	REVISIONS		
		P	LTR	DESCRIPTION
FT	0			B6 REVISED PER ECO-11-004820
				11MAR11 RK HMR

PHYSICAL PROPERTIES:

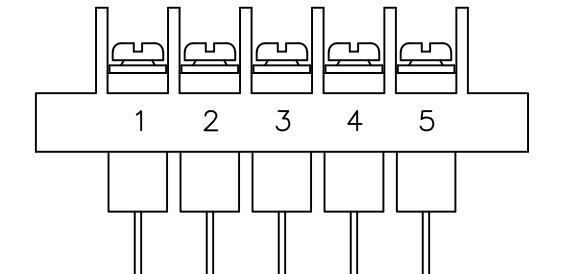
HOUSING: THERMOPLASTIC, UL94V-0, BLACK.
 TERMINALS: MATERIAL: COPPER ALLOY, PLATING SEE TABLE.
 SCREWS: #6-32 STEEL, ZINC PLATING W/ CLEAR CHROMATE.
 PITCH (TERMINAL SPACING): .375"
 OPERATING TEMP: 105° C MAX

ELECTRICAL PROPERTIES:

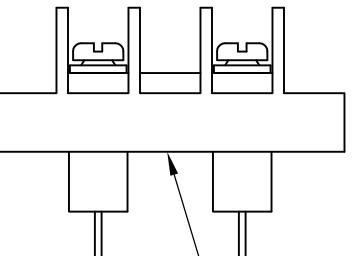
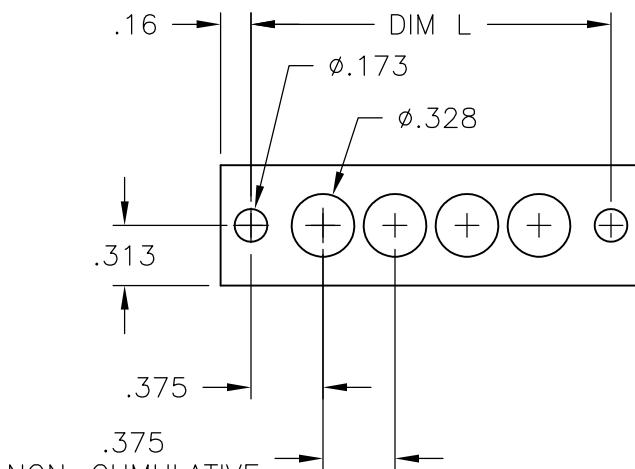
RATED CURRENT: 20A
 OPERATING VOLTAGE: 300V
 WIRE RANGE: 12-22 AWG



2-796985-2



2-796985-4

2-796985-3
CUT TURRET OFF
FLUSH WITH BOTTOM
OF HOUSING

MOUNTING PANEL LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:
INCHES		
0	PLC	± -
1	PLC	± -
2	PLC	± .02
3	PLC	± .010
4	PLC ANGLES	± -

MATERIAL: -

FINISH: -

DWN S SCHLEGEL CHK S YODER	5/27/03	TE Connectivity
APVD S YODER	5/27/03	
PRODUCT SPEC	—	
APPLICATION SPEC	—	
NAME	JC6-Q308-XX ASSEMBLY	
SIZE	CAGE CODE	DRAWING NO
A3	00779	C-6-1437665-2
RESTRICTED TO	—	
CUSTOMER DRAWING	SCALE	NTS
	1 OF 2	REV B6

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

(C) COPYRIGHT - By -

LOC	DIST	REVISIONS							
		P	LTR	DESCRIPTION			DATE	DWN	APVD
FT	0	—	—	SEE SHEET 1	—	—	—	—	—

1

PRELIMINARY

2


MATTE TIN PLATE .0002 - .0006 MIN OVER .00005 MIN NICKEL.

3

OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

BRIGHT TIN PL	9.000	9.314	23	JC6-Q308-23	2-1546700-2
BRIGHT TIN PL	8.625	8.939	22	JC6-Q308-22	2-1546700-1
BRIGHT TIN PL	8.250	8.564	21	JC6-Q308-21	2-1546700-0
BRIGHT TIN PL	7.875	8.189	20	JC6-Q308-20	1-1546700-9
BRIGHT TIN PL	7.500	7.814	19	JC6-Q308-19	1-1546700-8
BRIGHT TIN PL	7.125	7.439	18	JC6-Q308-18	1-1546700-7
BRIGHT TIN PL	6.750	7.064	17	JC6-Q308-17	1-1546700-6
BRIGHT TIN PL	6.375	6.689	16	JC6-Q308-16	1-1546700-5
BRIGHT TIN PL	6.000	6.314	15	JC6-Q308-15	1-1546700-4
BRIGHT TIN PL	5.625	5.939	14	JC6-Q308-14	1-1546700-3
BRIGHT TIN PL	5.250	5.564	13	JC6-Q308-13	1-1546700-2
BRIGHT TIN PL	4.875	5.189	12	JC6-Q308-12	796985-9
BRIGHT TIN PL	4.500	4.814	11	JC6-Q308-11	1-1546700-1
BRIGHT TIN PL	4.125	4.439	10	JC6-Q308-10	796985-6
BRIGHT TIN PL	3.750	4.064	9	JC6-Q308-09	1-1546700-0
BRIGHT TIN PL	3.375	3.689	8	JC6-Q308-08	6-1437665-9
BRIGHT TIN PL	3.000	3.314	7	JC6-Q308-07	6-1437665-8
BRIGHT TIN PL	2.625	2.939	6	JC6-Q308-06	6-1437665-7
BRIGHT TIN PL	2.250	2.564	5	JC6-Q308-05-175	2-796985-4
BRIGHT TIN PL	2.250	2.564	5	JC6-Q308-05	6-1437665-6
2	1.875	2.189	4	JC6-Q308-04	6-1546700-5
BRIGHT TIN PL	1.875	2.189	4	JC6-Q308-04	6-1437665-5
BRIGHT TIN PL	1.500	1.814	3	JC6-Q308-03-174	2-796985-3
BRIGHT TIN PL	1.500	1.814	3	JC6-Q308-03-173	2-796985-2
BRIGHT TIN PL	1.500	1.814	3	JC6-Q308-03	6-1437665-4
BRIGHT TIN PL	1.125	1.439	2	JC6-Q308-02	6-1437665-2
PLATING	DIM. B	DIM. A	NO. OF POS.	CATALOG NUMBER	PART NO.

3 OBSOLETE
SEE FIGURE (PAGE 1)SEE FIGURE (PAGE 1)
3 OBSOLETE
SEE FIGURE (PAGE 1)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLEGEL CHK S YODER	5/27/03	NAME	TE Connectivity
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD S YODER	5/27/03		
	0 PLC ± - 1 PLC ± - 2 PLC ± .02 3 PLC ± .010 4 PLC ± - ± - ANGLES	PRODUCT SPEC —	APPLICATION SPEC —	JC6-Q308-XX ASSEMBLY	
MATERIAL -	FINISH -	WEIGHT —	CUSTOMER DRAWING	SIZE A3 CAGE CODE 00779 DRAWING NO C-6-1437665-2	RESTRICTED TO —
		SCALE NTS	SHEET 2 OF 2	REV B6	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[796985-1](#) [796985-4](#) [796985-6](#) [796985-9](#)