


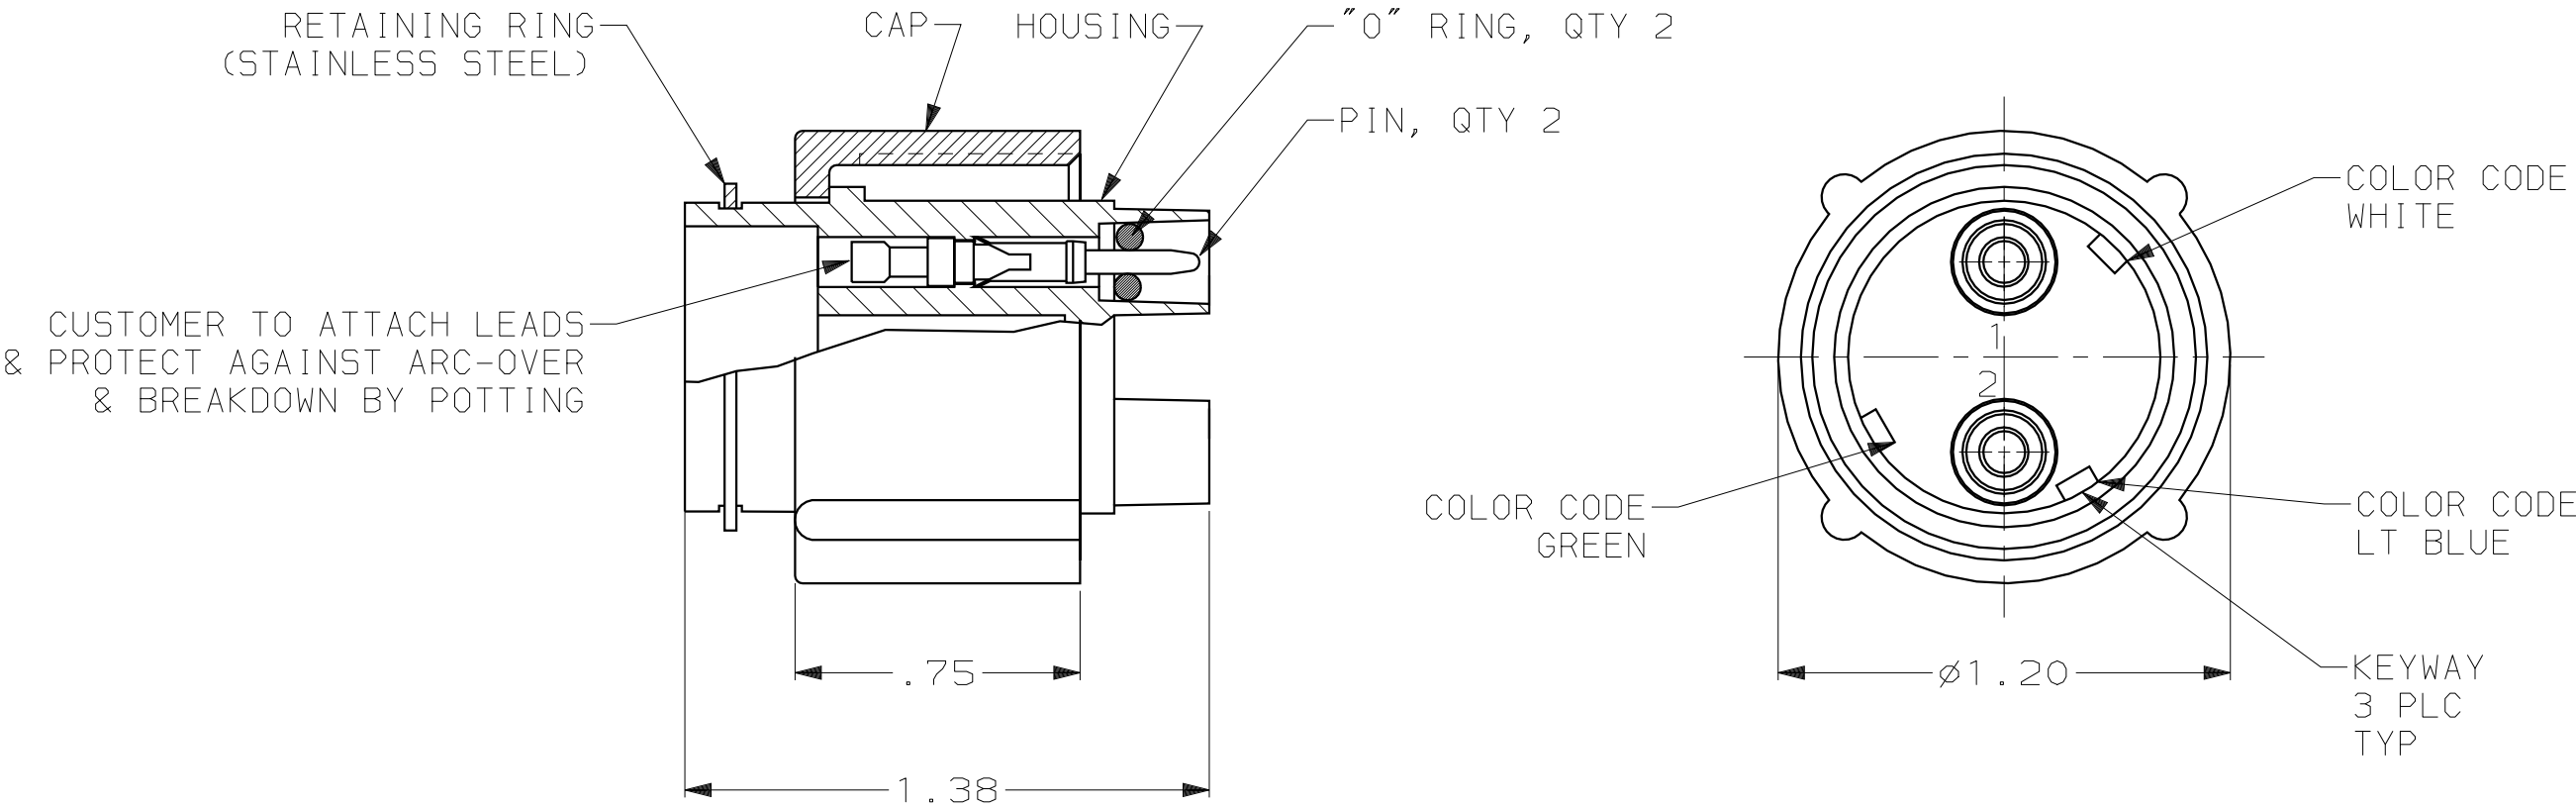

1. PLUG ASS'Y WILL WITHSTAND WITHOUT BREAKDOWN 27 KVDC
PIN TO PIN & 27 KVDC PIN TO GROUND WHEN MATED WITH RECEPT.
2. TYPE II PINS TO ACCEPT (1) 20 AWG, (1) 22 AWG, OR (1) 24 AWG
STRANDED WIRE.
3. TYPE II PINS TO ACCEPT (1) 16 AWG OR (1) 18 AWG STRANDED WIRE.
4. TYPE II PINS TO ACCEPT (1) 14 AWG STRANDED WIRE.
5. PLUGS AND PINS TO BE PACKAGED SEPARATELY.
6. TO REMOVE PINS USE EXTRACTION TOOL #861751-1.

OBS	4	45098	NO	14	860261-6
	3	45098	NO	16,18	860261-5
	2	45099	NO	20,22,24	860261-4
OBS	4	45098	YES	14	860261-3
	3	45098	YES	16,18	860261-2
OBS	2	45099	YES	20,22,24	860261-1

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON : 2 PLC DEC ± - 3 PLC DEC ± - ANGLES ± - MATERIAL POLYESTER FINISH BLACK	DR 07-08-93 THOMPSON	AMP AMP Incorporated Harrisburg, PA 17105-3608			
	CHK 07-23-93 S. GLATFELTER				
	APPD 07-23-93 S. GLATFELTER	NAME PLUG KIT, LGH, 2 POSN.			
	APPD 07-23-93 S. GLATFELTER				
	PRODUCT SPEC -	SIZE C	CAGE CODE 00779	DRAWING NO C-860261	
	APPLICATION SPEC -	SCALE 2:1		SHEET 1 OF 1	
	WEIGHT -				

THIS DRAWING IS A CONTROLLED DOCUMENT FOR
AMP INCORPORATED. IT IS SUBJECT TO CHANGE
AND THE CONTROLLING ENGINEERING ORGANIZATION
SHOULD BE CONTACTED FOR THE LATEST REVISION.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[860261-2](#)