RED INDICATES ORIGINAL


	DAC	DATA CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO TROMPETER ELECTRONICS INC.			REVISIONS	31	0-0074	SH 1
•		AND SHALL NOT BE DISCLOSED, COPIED OR USED FOR PROCUREMENT OR MANUFACTURE WITHOUT	REV	EO	DESCRIPTION	DWN .	APPROVED	DATE
	ш	EXPRESS WRITTEN PERMISSION.	ľ	12207	ADDED224 & -225; ADDED	DKC		7/52/
			١ ١	12301	NOTE 4 SHEET 2: SEE ECO	DVL	IAM AAM.	7/20/


1.423 ±.030


SHRINKABLE SEALING SLEEVE

TABLE 1 INCH MM									
HZAD		I.A.	В.	AZZEMBLE	.005 0.13				
NO.	ACCOMMODATED	HEX	DIM	PER	.030 0.76				
-201	M17/176-00002				.344 B.74				
-202		1			.650 15.51				
-203]			1.00 25.40				
-204	TOTAL PRINCIPLE]			1.15 29.21				
-205		}	1.79	TAI-169	1.25 31.75				
-206				141-103	1,423 36,14				
~207					1.51 38.35				
-208					1.75 44.45				
-209					1.79 45.47				
-210					1.112 [48141]				
-211]				
-212		Ì							
-213	TWC-78-2		1.51	TAI-161					
-214]	.,	(WI-101					
-215	BL-9B2 TIMES	l	l						
-216	BL-1242 TIMES								
-217	GC875TM24H GRUMMAN	.344			1				
-218	EPD 221888 RAYCHEM	,,,,44							
-219									
-220	GC875RR1, GRUMMAN		1.79	TAI-159					
-221	10514, RAYCHEM								
-222	10513, RAYCHEM								
-223	HMS2-1149, HUGHES								
-224	TVCP-124-3		1.51	717 151	1				
-225	PS665PL, PRIME STOCK		1.51	TAI-161					
-301	GCB75GC1, GRUMMAN				ĺ				
	GC875GB1, GRUMMAN								
	7528A5314, RAYCHEM		1.79	TAI-154					
-304									
-305	M17/177-00001, THERMATICS								
-306	TRC-50-2		1,51	TAI-17B					
	M17/134-00002		1,41	1WT-1\R					
-307	TRC-75-1		1.79	TAI-154					
-308	TRC-75-2		1.51	TAI-178					
-309	TRC-50-1		1.79	TAI-154					
					•				

as group

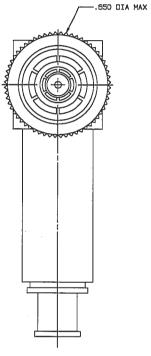



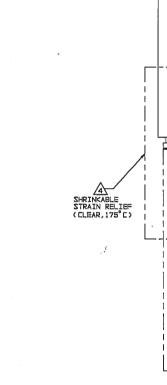

<u>-201 SH□WN</u>

. OT	<u>, </u>	DES	CRIPTION	PART NUMBER	ITEM	
	X ±	SPECIFIED DOS	RF co	MPETER	PLR375C/ PLR375CS	
DW	1 DKC	5-19-98	MATERIAL	CODE IDENT	DRAWING NO.	REV
CH		6-8-98		14949	310-0074	K
NEXT ASSY APP		7/16/98	SCALE 4/1	DATE 8/29	/89 SHEET 1 OF 3	2

- 5. IF SAFETY WIRE TYPE RED'D ADD SUFFIX "S" TO MODEL NO. (PLR375CS)
- 1 SHRINKABLE STRAIN RELIEF AND/OR SHRINKABLE SEALING SLEEVE SUPPLIED LODGE AS FOLLOWS:
 - THROUGH -303, -305,-307 & -309

 1 SHRINKABLE STRAIN RELIEF (1,00 LONG)

 1 SHRINKABLE SEALING SLEEVE (1,25 LONG)
 - CABLE GROUPS -211 THROUGH -216, -306 & -308
 SHRINKABLE STRAIN RELIEF (1.75 LONG)
- 3. THREADED BAYDNET CONCENTRIC TWINAX/TRIAX TRB RIGHT ANGLE FULL CRIMP CABLE PLUG
- 2. FINISH: TFS-1A (NICKEL)
- 1. ALL DIM ARE IN INCHES

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Cinch Connectivity Solutions: PLR375C-303