
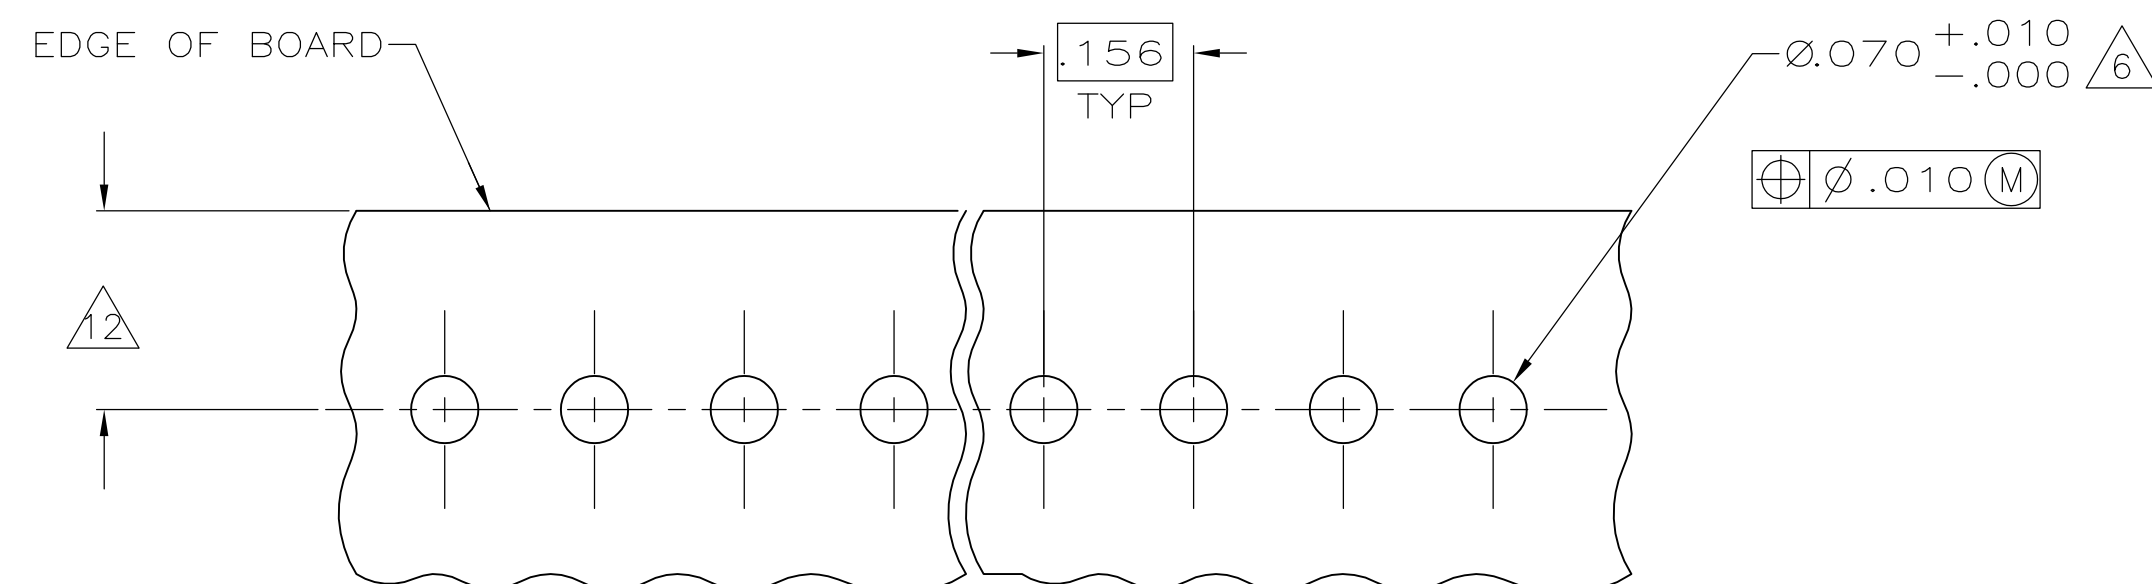
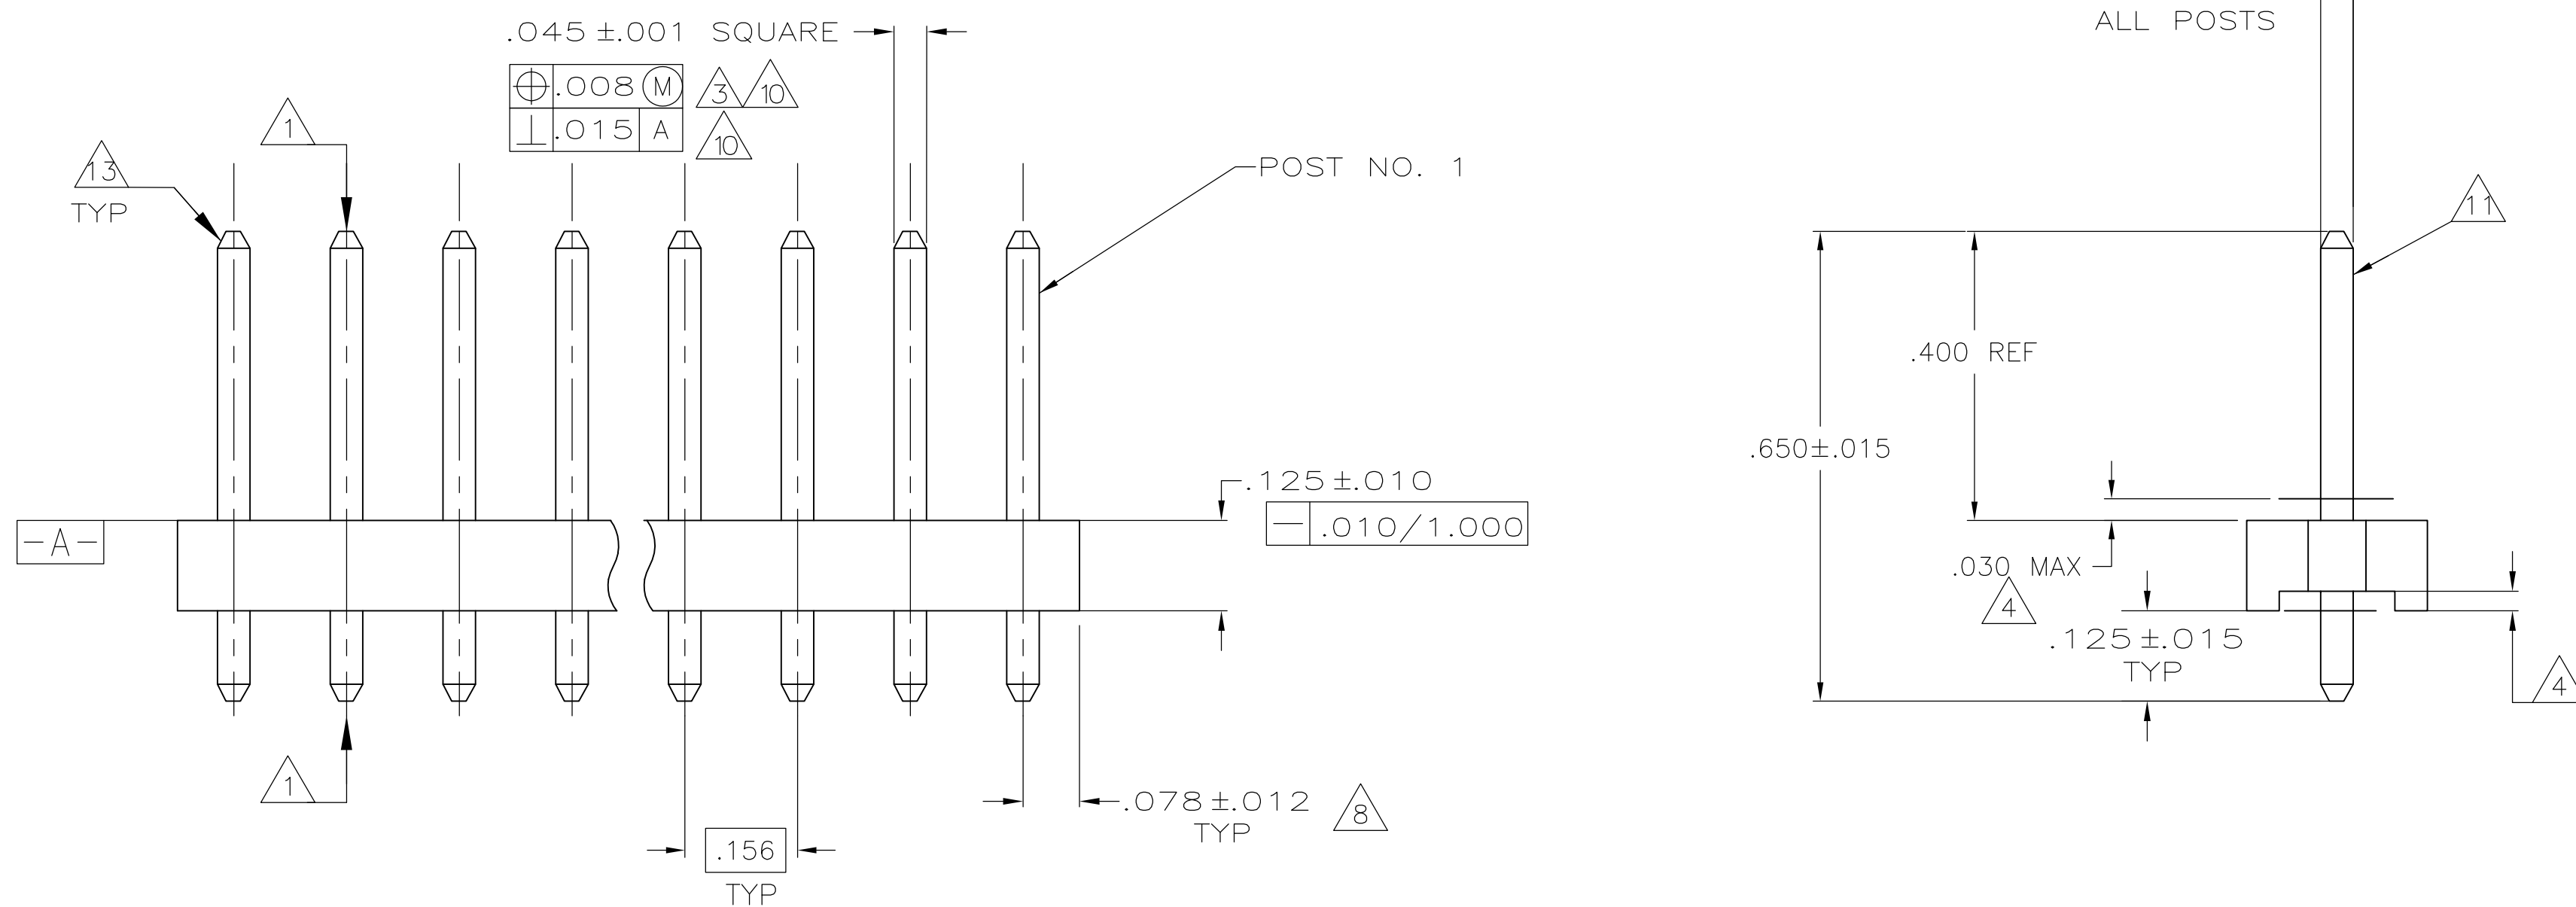


LOC	DIST	REVISIONS					
CM	0	P	LTR	DESCRIPTION	DATE	DWN	APVD
			AA1	ECR-16-010182	14JULY16	A.Q	D.Z

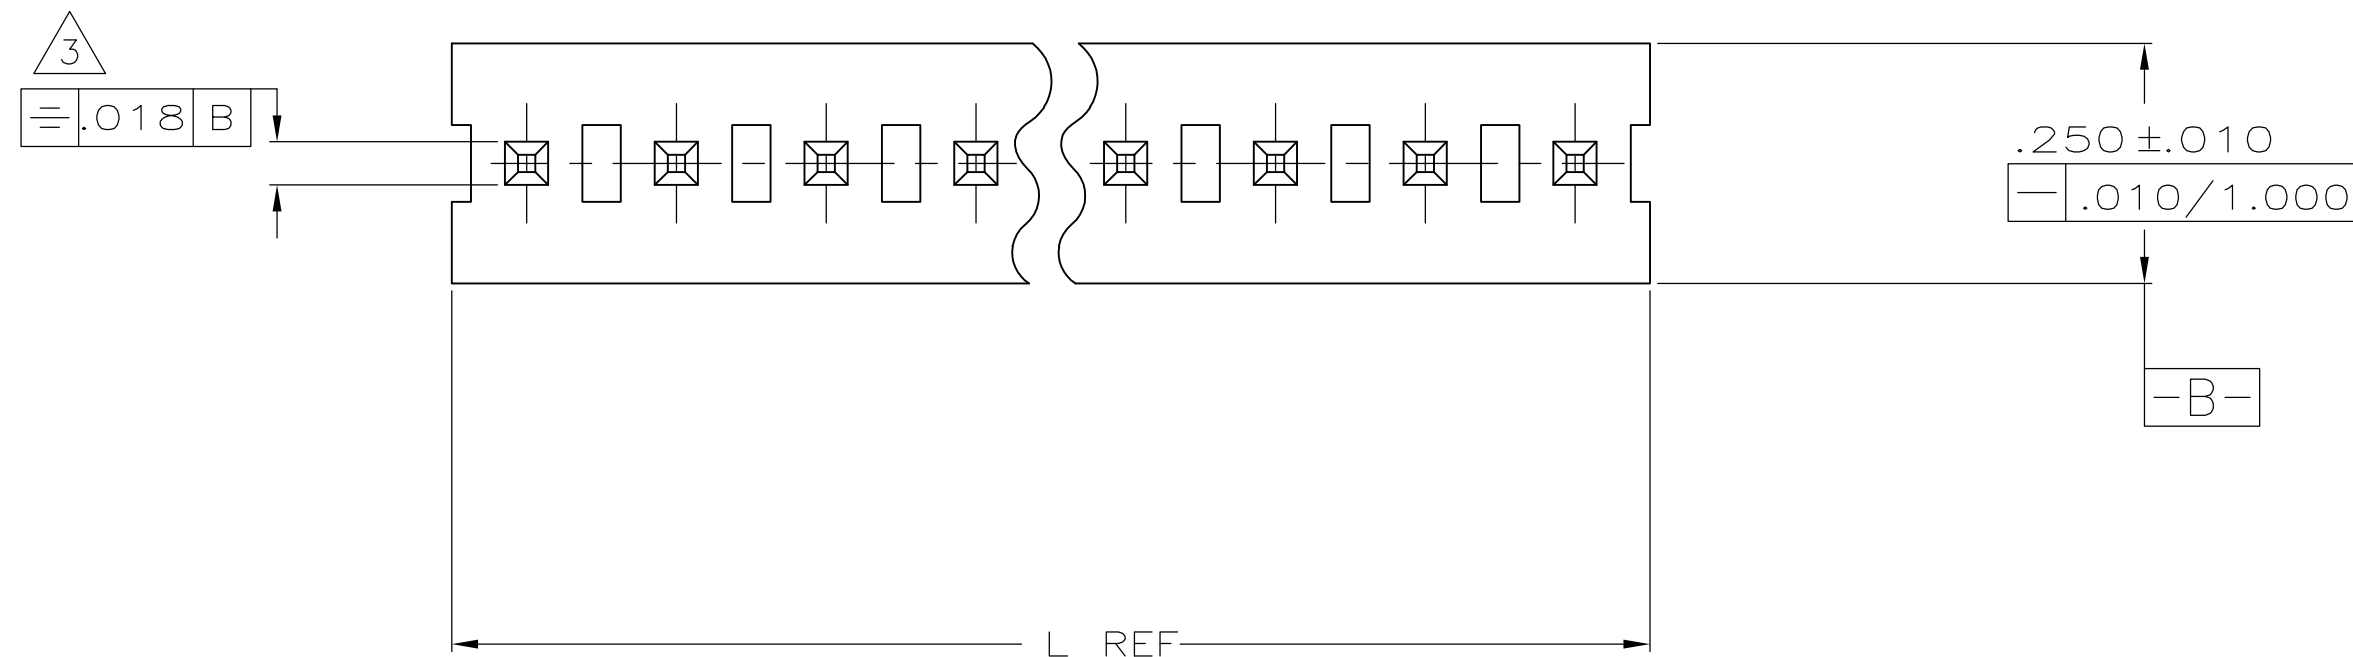





RECOMMENDED MOUNTING HOLE PATTERN  
FOR .063 THICK P.C. BOARD

.065	1.65	—	—
.063	1.60	—	—
.060	1.52	—	—
.045	1.14	—	—
.030	0.76	1.000	25.40
.018	0.46	.700	17.78
.015	0.38	.450	11.43
.012	0.30	.250	6.35
.010	0.25	.156	3.96
.008	0.20	.140	3.56
.005	0.13	.125	3.18
.003	0.08	.078	1.98
.001	0.03	.070	1.78
IN	MM	IN	MM

CONVERSION TABLE

14	3rd	2.028	51.51	13	3-640383-1	
	NONE	3.744	95.10	24	2-640383-4	
		3.588	91.14	23	2-640383-3	
		3.432	87.17	22	2-640383-2	
		3.276	83.21	21	2-640383-1	
		3.120	79.25	20	2-640383-0	
		2.964	75.29	19	1-640383-9	
		2.808	71.32	18	1-640383-8	
		2.652	67.36	17	1-640383-7	
		2.496	63.40	16	1-640383-6	
		2.340	59.44	15	1-640383-5	
		2.184	55.47	14	1-640383-4	
		2.028	51.51	13	1-640383-3	
		1.872	47.55	12	1-640383-2	
		1.716	43.59	11	1-640383-1	
		1.560	39.62	10	1-640383-0	
		1.404	35.66	9	640383-9	
		1.248	31.70	8	640383-8	
		1.092	27.74	7	640383-7	
		.936	23.77	6	640383-6	
		.780	19.81	5	640383-5	
		.624	15.85	4	640383-4	
		.468	11.89	3	640383-3	
		.312	7.92	2	640383-2	
		OMIT POS.	IN	MM	NUMBER OF POSITIONS	PART NUMBER
			L			

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN B. LEWIS		10-14-92		 TE Connectivity	
		CHK R. SWING		10-14-92			
DIMENSIONS:		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		NAME		MTA-156 HEADER ASSEMBLY, PLAIN, STRAIGHT, .045 SQUARE POST, TIN PLATED	
INCHES				APVD			
		0 PLC ± —		PRODUCT SPEC		SIZE CAGE CODE DRAWING NO RESTRICTED TO	
		1 PLC ± —		—			
		2 PLC ± —		—			
		3 PLC ± .005		APPLICATION SPEC			
4 PLC ± —		—		—		A1 00779 C-640383	
ANGLES ± —		WEIGHT		—			
MATERIAL		FINISH		CUSTOMER DRAWING		SCALE 5:1 SHEET 1 OF 1 REV AA	
							

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-640383-1](#)