

180X Ø0.39±0.05
PLATED THRU HOLE

180X Ø0.48±0.013
DRILL HOLE
Ø0.10

OFFSET BETWEEN BOARD AND
BACKPLANE HOLE COLUMNS


RECOMMENDED PCB LAYOUT
MIN BOARD THICKNESS 1.0

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			C	REVISED PER ECO-15-001491	09MAR2015	AP	DD

1 MATERIAL:
HOUSING: LCP, GLASS FILLED, UL94V-0.
TERMINALS: HIGH PERFORMANCE COPPER ALLOY.

2 FINISH:
30µ" SELECTIVE GOLD IN CONTACT AREA. SELECTIVE TIN
ON PCB TAILS, NICKEL OVERALL.

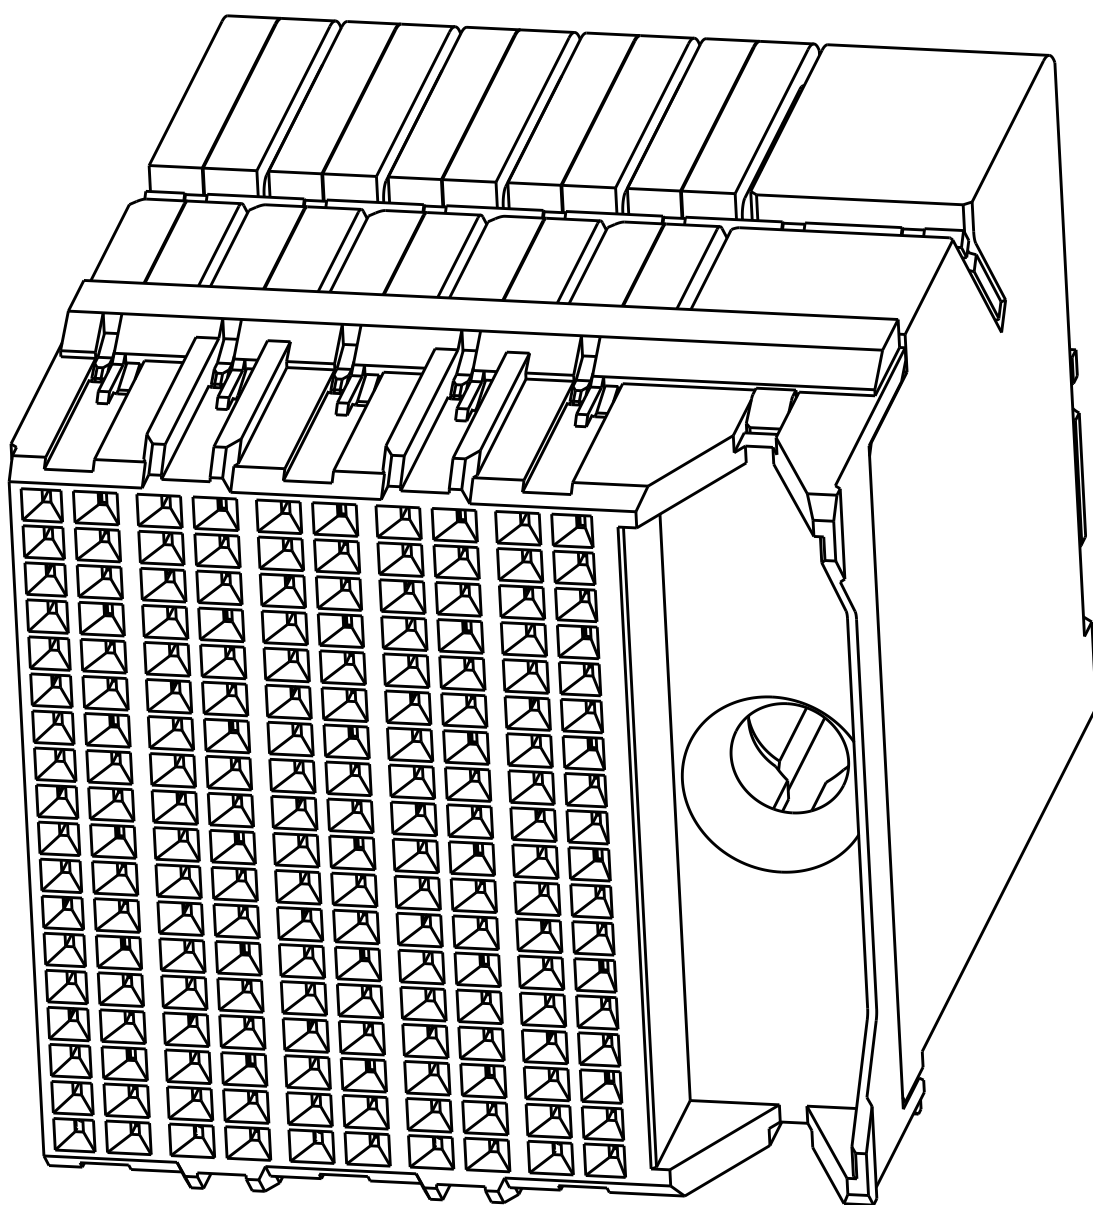


3. CONNECTORS SUPPLIED WITH MOUNTING SCREWS.



SCALE 4:1

REFER TO WWW.TE.COM
FOR PRODUCT AVAILABILITY

NONE	2	2132719-1
KEY POSITION	FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	11MAY2011		 TE Connectivity	
DIMENSIONS:		CHK	D. DIXON 11MAY2011			
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD	D. DIXON 11MAY2011		NAME	
				IMPACT, ORTHOGONAL, 6 PAIR, DAUGHTERCARD, 10 COLUMN, RIGHT GUIDED, SIGNAL MODULE, 0.39 EYELET		
	0 PLC	±	PRODUCT SPEC		SIZE	
	1 PLC	±0.25	-		CAGE CODE	
MATERIAL	2 PLC	±0.15	APPLICATION SPEC		DRAWING NO	
	4 PLC	±	-		A100779C=2132719	
	ANGLES	±	WEIGHT		RESTRICTED TO	
	FINISH	±	-		A100779C=2132719	
SEE TABLE		CUSTOMER DRAWING		SCALE 5:1 SHEET 1 OF 1 REV C		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2132719-1](#)