

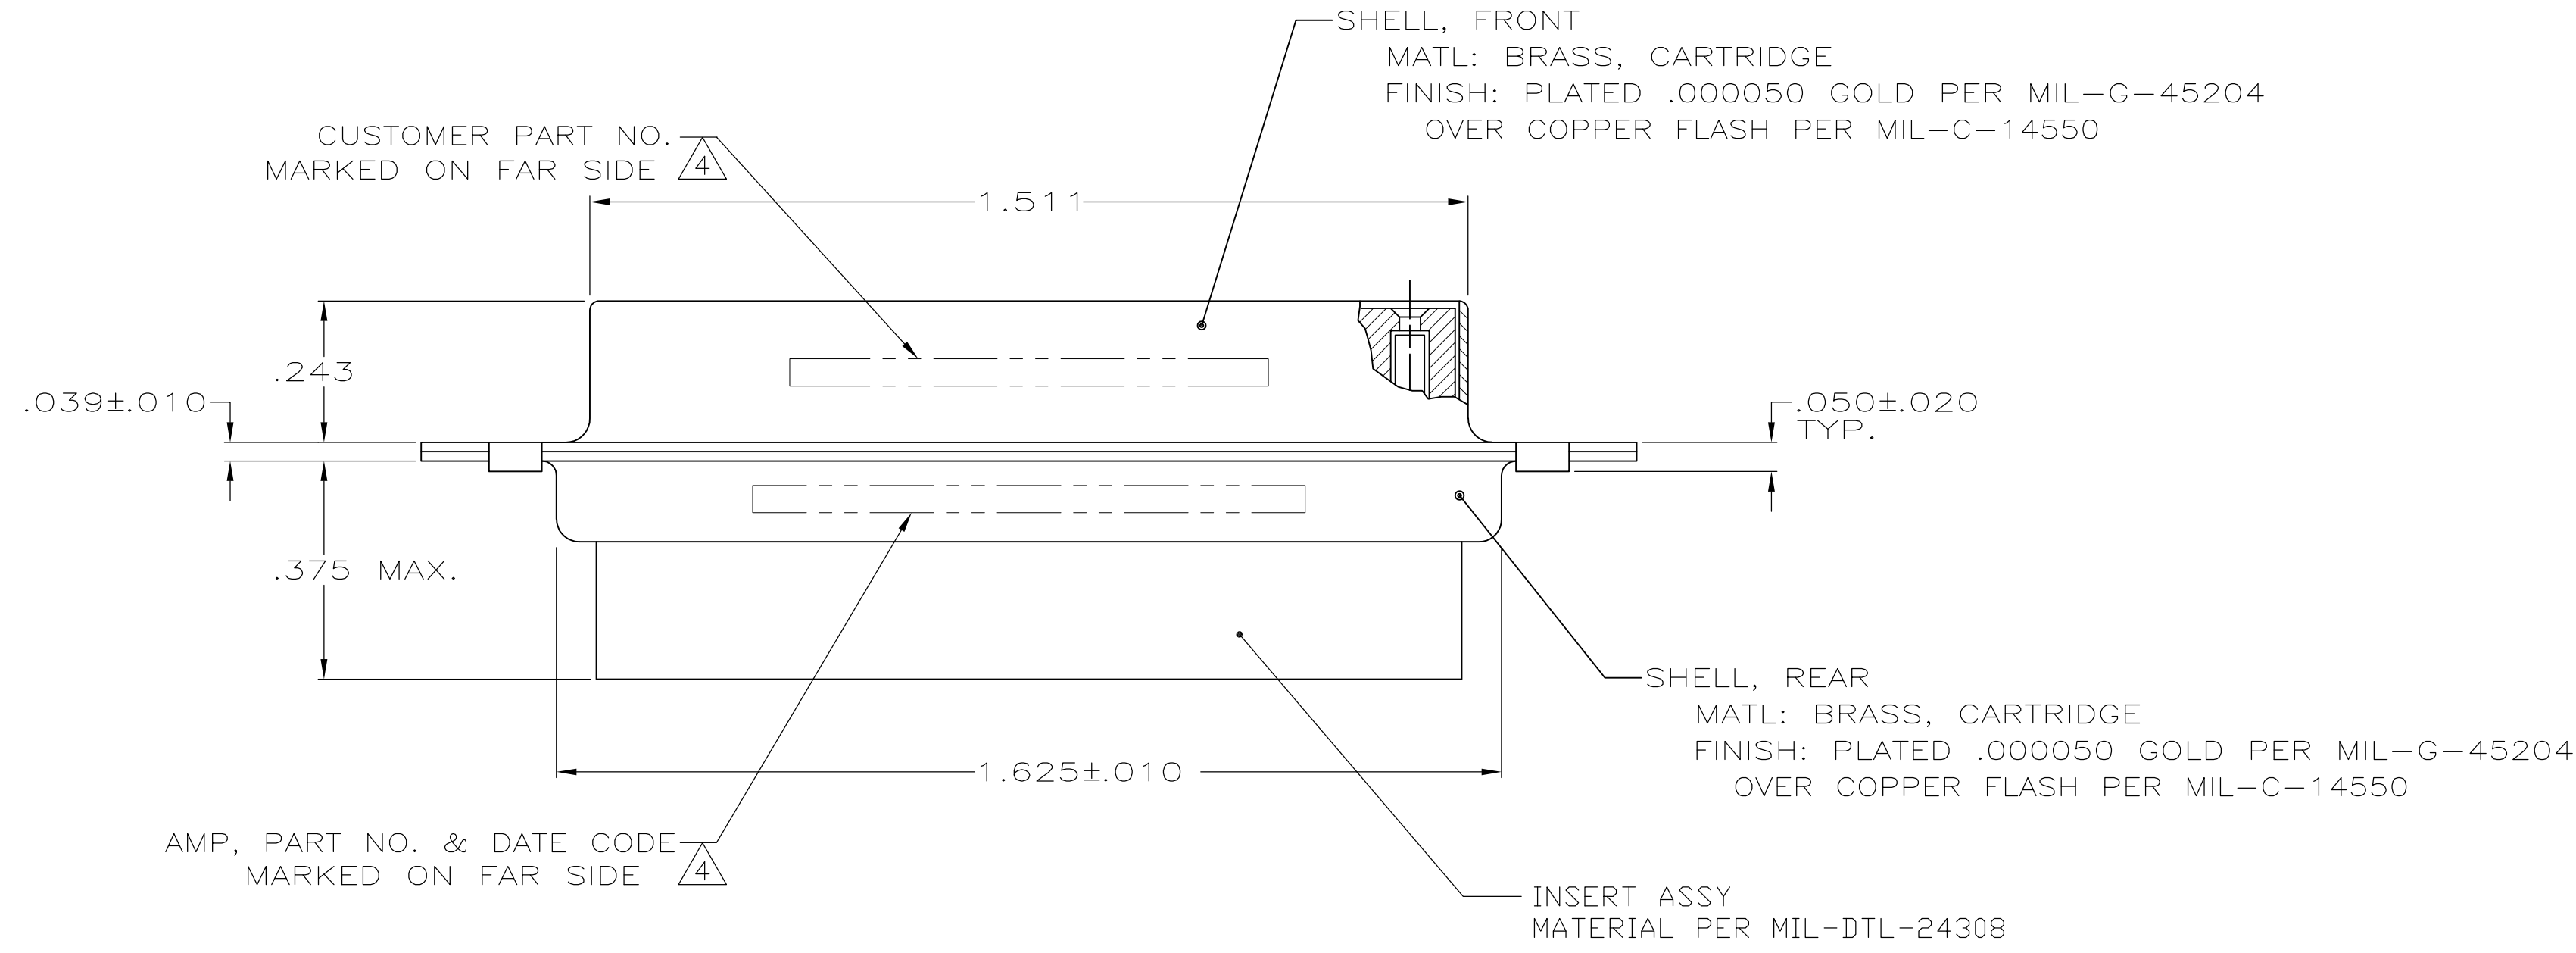
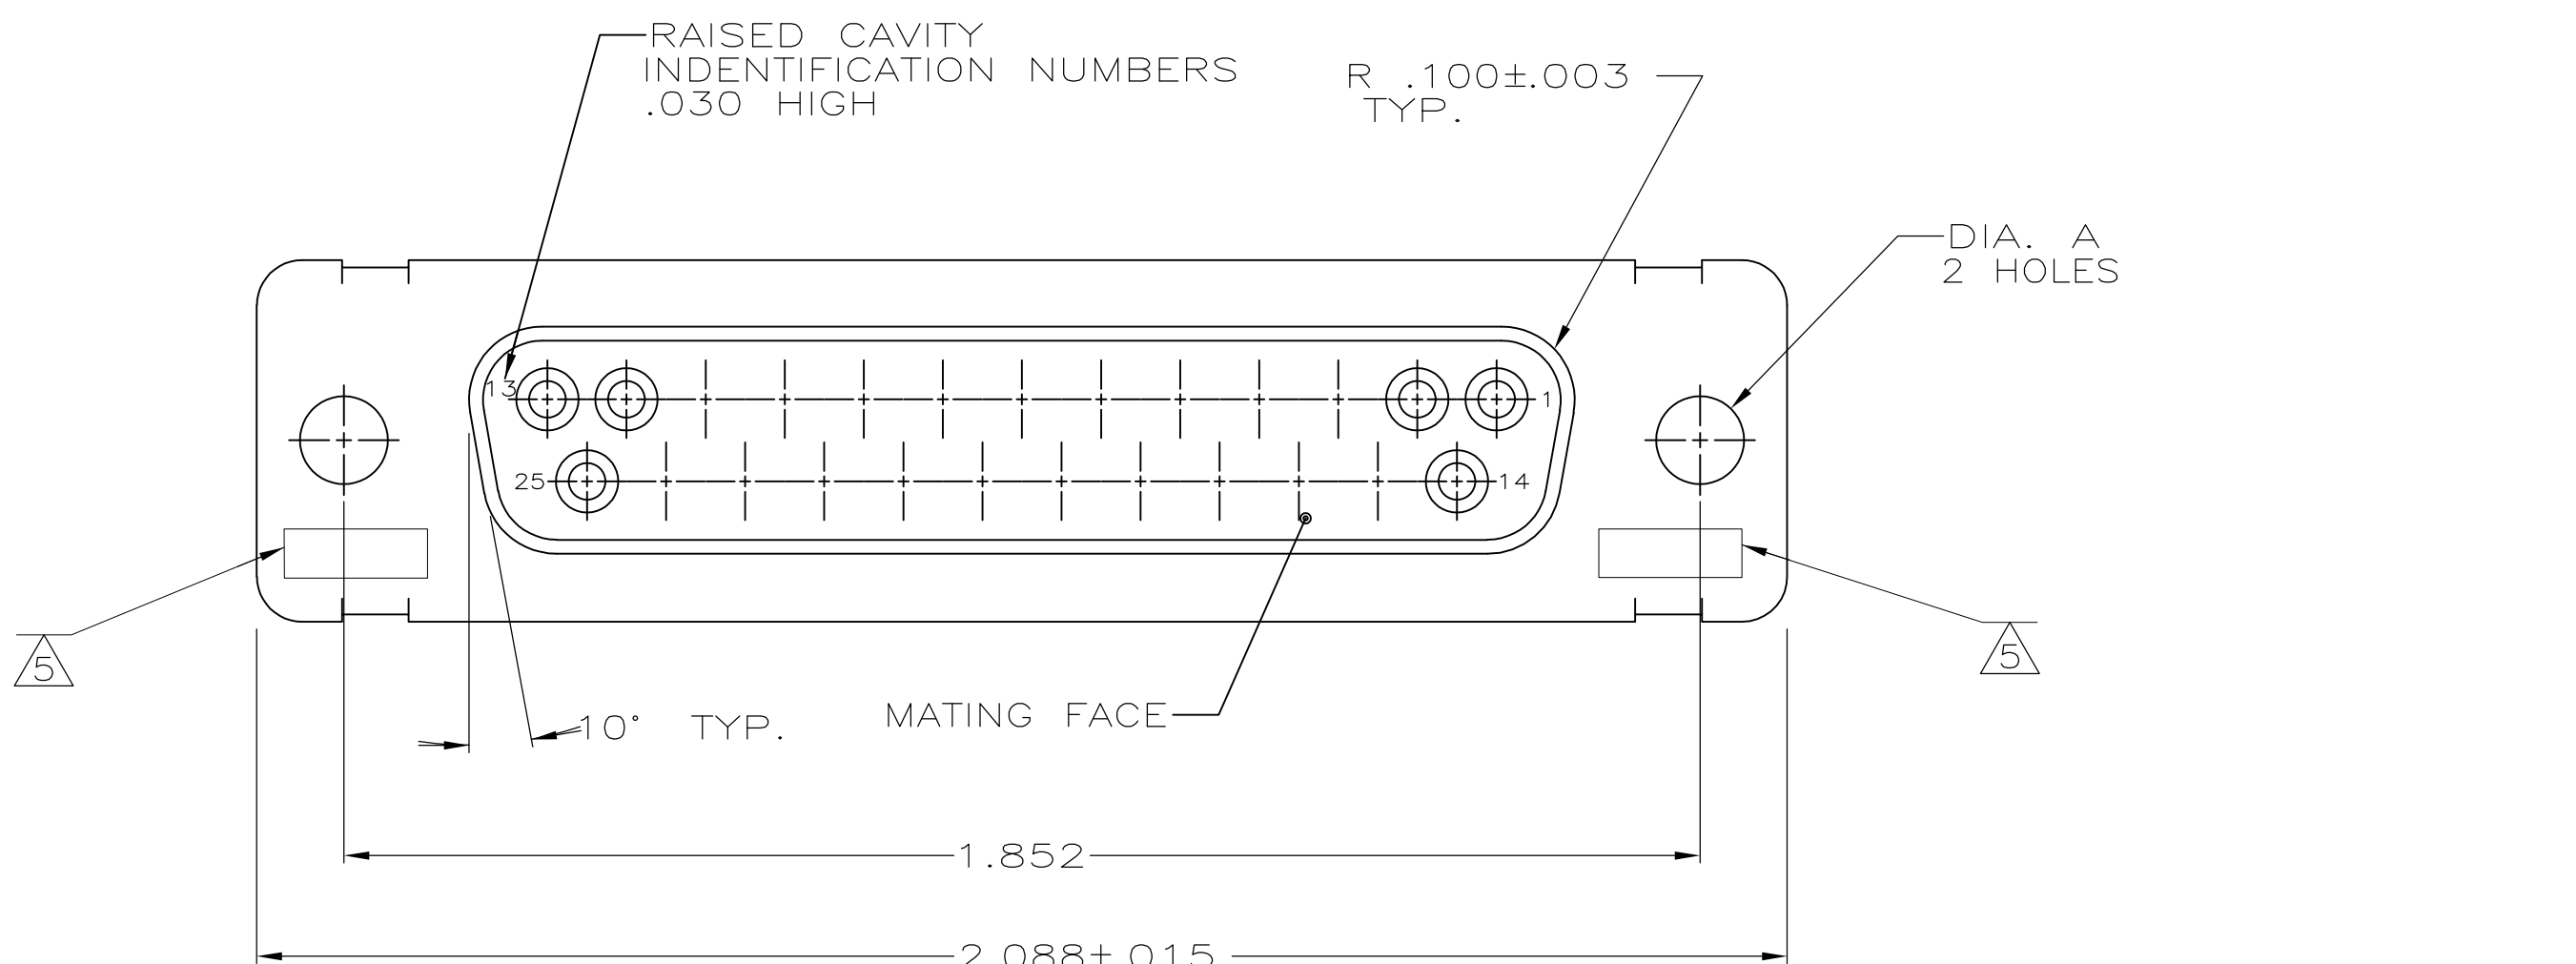


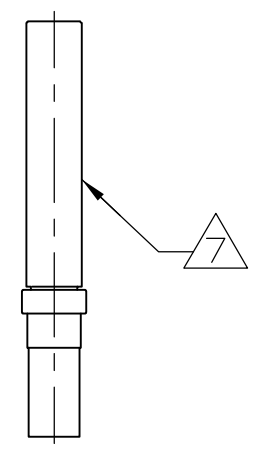

- 1. THIS RECEPTACLE WILL MATE WITH ANY PLUG CONNECTOR WITH THE SAME INSERT ARRANGEMENT AS DEFINED BY MS18275-1.
- 2. MAXIMUM WIRE INSULATION USED WITH THIS RCPT. IS .072 DIA. MAX.
- 3. Be-Cu RETENTION CLIPS ARE INCLUDED IN INSERTS.
- 4 FAR SIDE REFERS TO WIDE SIDE OF KEYSTONE.
- 5 UL/CSA DESIGNATION STAMPED IN THIS AREA,OPTIONAL
- 6 THESE CONNECTORS ARE QUALIFIED TO GODDARD SPACE FLIGHT CENTER SPECIFICATION S-311-P-4.
- 7 CONNECTOR SUPPLIED WITH CONTACTS, AMP PART NUMBER 206793-1; (NOT INSTALLED).

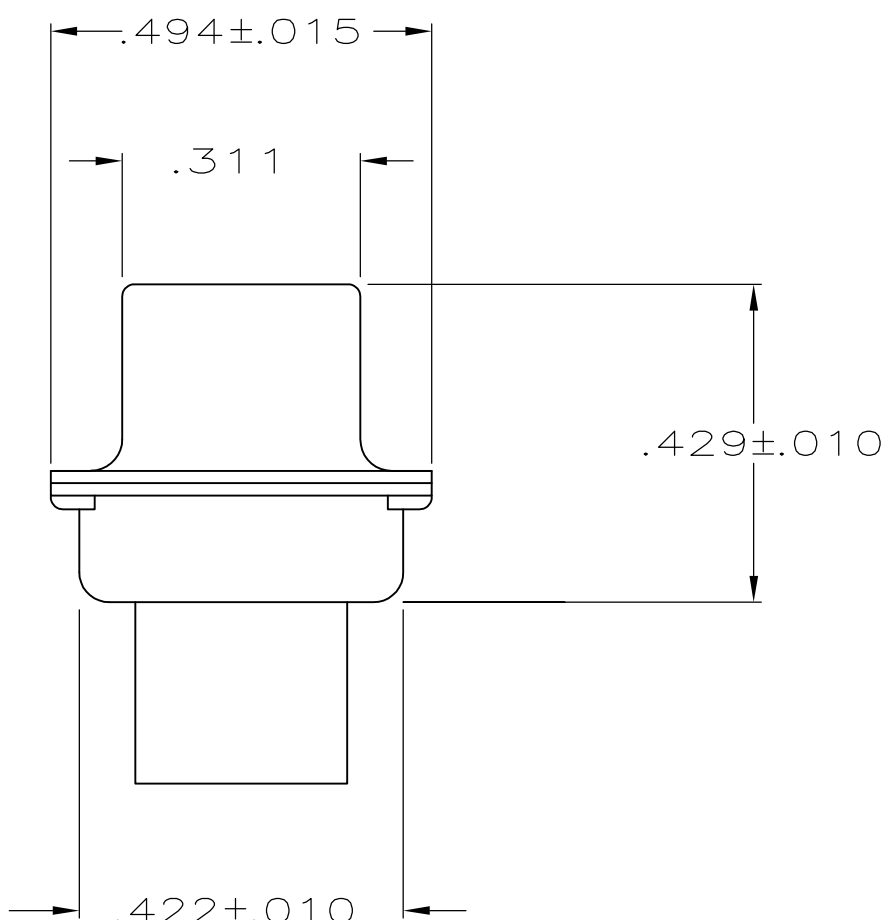

OBSOLETE	4	.120	LMSC 1621480-003	206801-8
		.120	LMSC 1621480-003	206801-7
		.120	2A014-008V-001	206801-4
		.154		206801-3
	6	.120	311P409-3S-B-12	206801-2
		.154	311P409-3S-B-15	206801-1
REMARKS		DIA A	MARK CUSTOMER P/N	AMP P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
M.CLOUSER
CHK
T.CANTLIN
APVD

1-3-89
1-24-89

DIMENSIONS:
INCHES

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± .005
4 PLC ± -
ANGLES ± -

MATERIAL
SEE CALLOUTS

TOLERANCES UNLESS OTHERWISE SPECIFIED:

WEIGHT
—

CUSTOMER DRAWING

NAME
RECEPTACLE FOR SOCKET CONTACTS,
SIZE #3, 25 POS. (NON-MAGNETIC)

SIZE
A1

CAGE CODE
00779

DRAWING NO
206801

RESTRICTED TO
—

TE Connectivity

SCALE 4:1

SHEET 1 OF 1

REV R

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[206801-1](#)