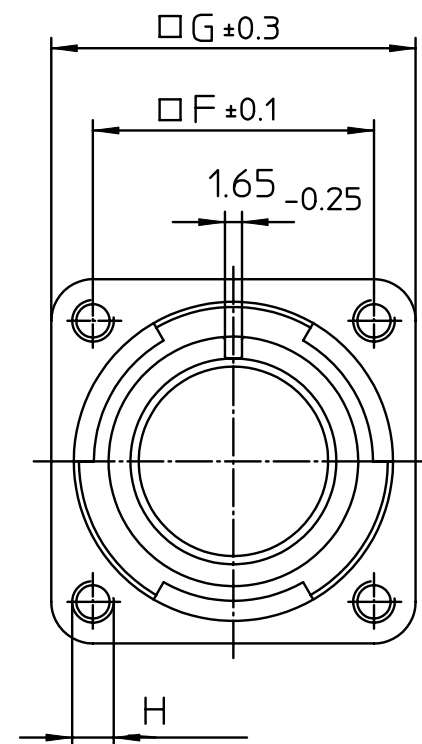
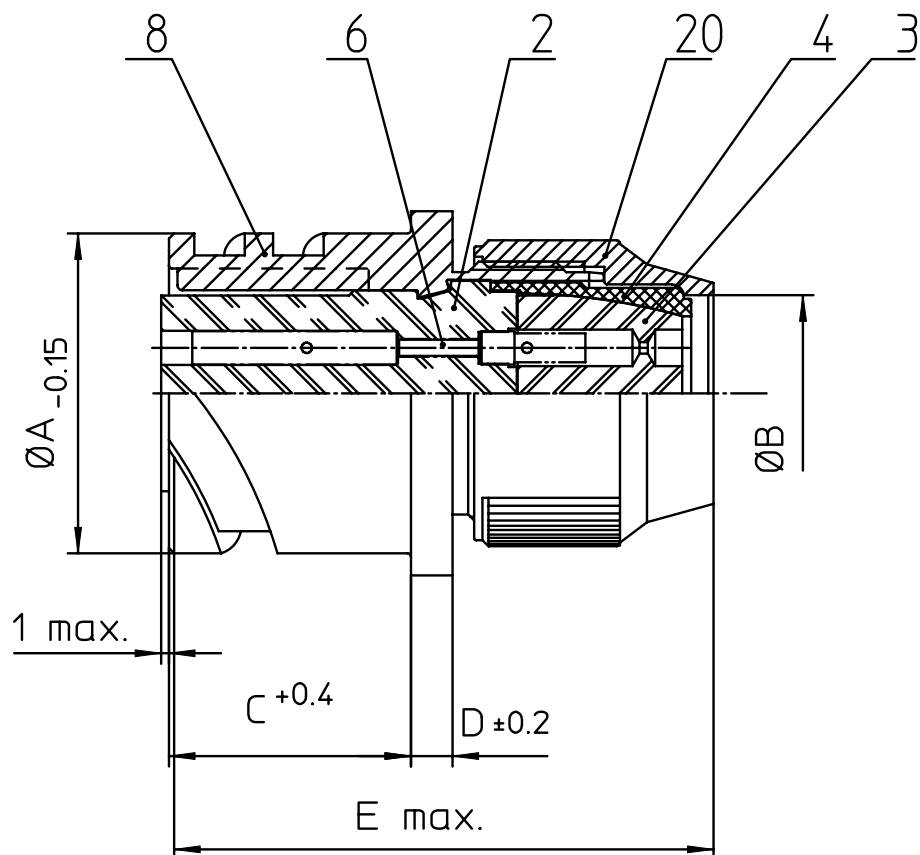


| NO. | MASSE / DIMENSION |
|-----|-------------------|
| A   | 24.6              |
| B   | 12.4              |
| C   | 18.2              |
| D   | 3.2               |
| E   | 44                |
| F   | 23                |
| G   | 30                |
| H   | M4                |

| NO. | BESCHREIBUNG / DESCRIPTION              |
|-----|-----------------------------------------|
| 2   | ISOLIERKÖRPER BUCHSE / INSULATOR SOCKET |
| 3   | DICHTKÖRPER / GROMMET                   |
| 4   | ENDRING / ENDRING                       |
| 6   | KONTAKTBUCHSE / CONTACT SOCKET          |
| 8   | DOSENGEHÄUSE / SHELL                    |
| 20  | KURZES ENDGEHÄUSE/SHORT ENDBELL         |

Note: Due to an automatic nomenclature system, numbers generated may not be sequential.

Specification and Dimensions subject to change  
Drawings illustrate normal insulator positioning

#### Material Specification:

|                     |                                               |
|---------------------|-----------------------------------------------|
| Shell Material:     | Aluminium alloy                               |
| Shell Plating:      | Olive drab chromate over cadmium (conductive) |
| Insulator Material: | CR-Elastomere                                 |
| Contact Material:   | Copper alloy                                  |
| Contact Plating:    | Hard silver                                   |

all dimensions are in mm  
Dimensions without tolerance indications are general tolerances in acc. with DIN7168m

drawing for  
CUSTOMER



description **CA3100R14S-6S-B-F80**  
Wall mounting receptacle  
Shortened light-weight endbell without cable clamp  
AWG Crimp / Socket / Layout: 14S-6

© All rights reserved. Reproduction or issue to third in any form  
whenever is only permitted with written authorization of ITT Cannon



page  
1/1

revision  
1862 1. Jul 20