

80×80×15 mm

San Ace 80 9P type   


General Specifications

- Material Frame: Plastic (Flammability: UL 94V-0), Impeller: Plastic (Flammability: UL 94V-1)
- Expected life See the table below. (L10 life: 90% survival rate for continuous operation in free air at 60°C, rated voltage)
- Motor protection function Locked rotor burnout protection, Reverse polarity protection
For details, please refer to p. 529.
- Dielectric strength 50/60 Hz, 500 VAC, for 1 minute (between lead wire conductors and frame)
- Insulation resistance 10 MΩ or more with a 500 VDC megger (between lead wire conductors and frame)
- Sound pressure level (SPL) At 1 m away from the air inlet
- Storage temperature -30 to +70°C (Non-condensing)
- Lead wire ⊕Red ⊖Black or Blue (Sensor) Yellow
- Mass 68 g

Specifications

The models listed below **have ribs and pulse sensors.**


Model no.	Rated voltage [V]	Operating voltage range [V]	Rated current [A]	Rated input [W]	Rated speed [min ⁻¹]	Max. airflow [m³/min] [CFM]		Max. static pressure [Pa] [inchH ₂ O]		SPL [dB (A)]	Operating temperature [°C]	Expected life [h]
109P0812H701	12	7 to 13.8	0.2	2.4	3100	0.91	32.1	29.4	0.118	31	-20 to +70	40000/60°C
109P0812M701			0.09	1.08	2000	0.57	20.1	12.6	0.051	21		60000/60°C
109P0824H701	24	14 to 27.6	0.1	2.4	3100	0.91	32.1	29.4	0.118	31		40000/60°C
109P0824M701			0.05	1.2	2000	0.57	20.1	12.6	0.051	21		60000/60°C

Other sensor specifications are available as options. Refer to the index (p. 544).

Airflow - Static Pressure Characteristics


109P0812H701 With pulse sensor

Operating voltage range

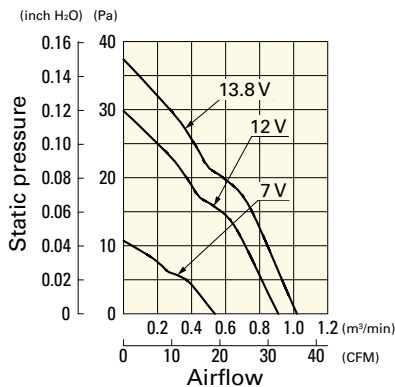


109P0812M701 With pulse sensor

Operating voltage range

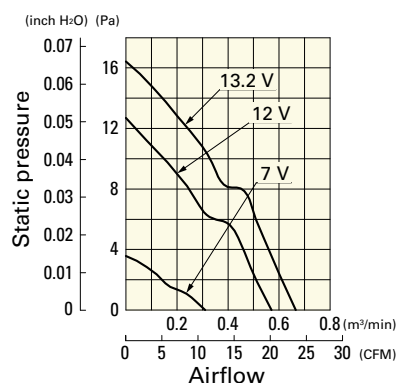


109P0824H701 With pulse sensor

Operating voltage range

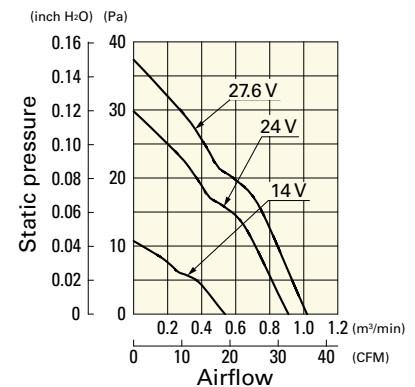


109P0824M701 With pulse sensor


Operating voltage range

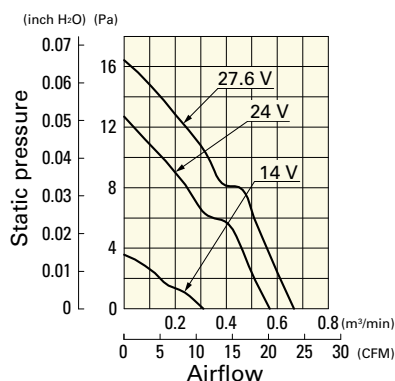

■ Dimensions (unit: mm)

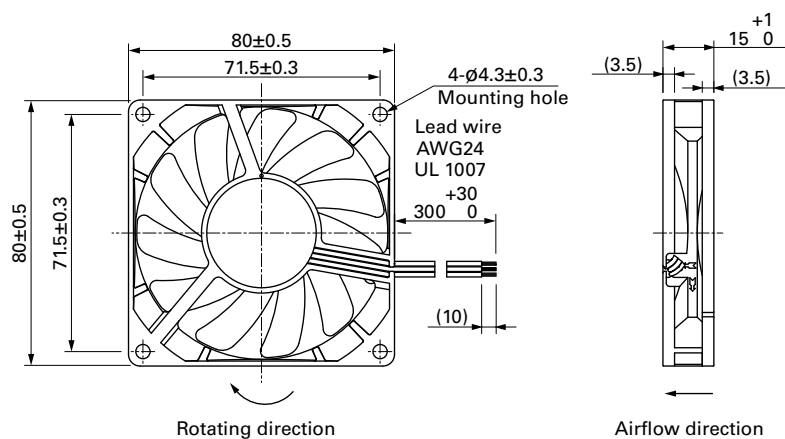

■ Reference Dimensions of Mounting Holes and Vent Opening (unit: mm)

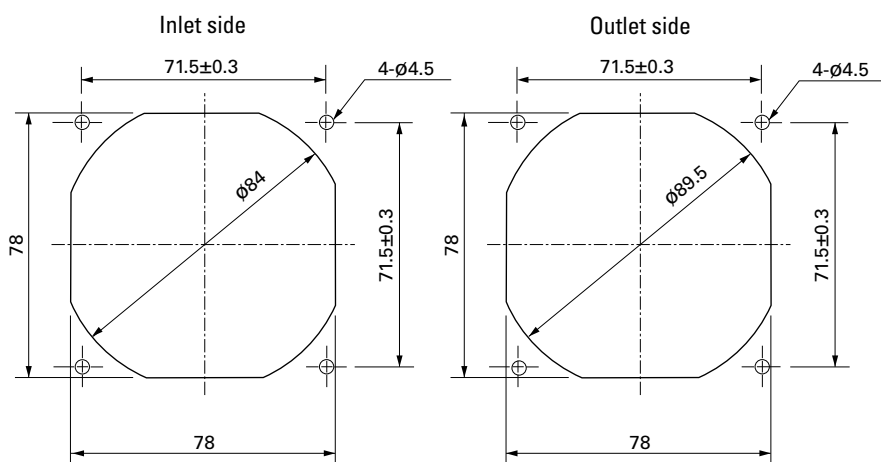

■ Options

Finger guards

page: p. 513

Model no.: 109-049C, 109-049E, 109-049H

Resin finger guards

page: p. 520

Model no.: 109-1002G

Resin filter kits

page: p. 521

Model no.: 109-1002F13 (13PPI), 109-1002F20 (20PPI),
109-1002F30 (30PPI), 109-1002F40 (40PPI)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Sanyo Denki:

[109P0812M701](#) [109P0824M701](#) [109P0824M702](#) [109P0812M702](#) [109P0824H701](#) [109P0812H701](#) [109P0824H702](#)
[109P0812H702](#) [109P0812H7D01](#) [109P0812M7D01](#) [109P0824H7D01](#) [109P0824M7D01](#)