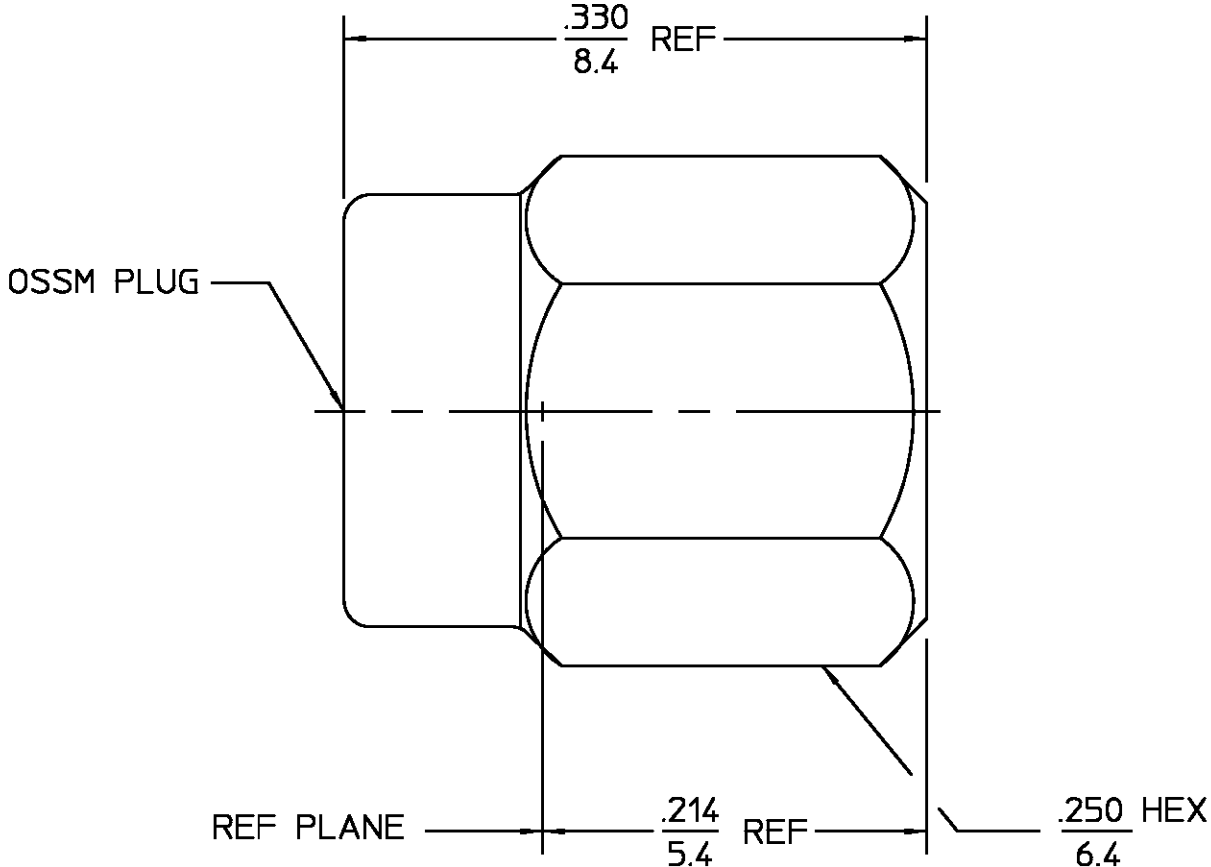


		DESIGNED FOR USE WITH .085 SEMI-RIGID CABLE		REVISIONS																																																									
		CABLE ENTRY DIAMETER MINIMUM		REV	DESCRIPTION	DATE	APPROVED																																																						
		HOUSING .0875		01 ₃	REVISED	05/05/94	<i>AD</i>																																																						
<table><tr><th>ELECTRICAL</th><th>MECHANICAL</th><th>ENVIRONMENTAL</th></tr><tr><td>Nominal Impedance (Ohms) 50</td><td>Interface Dimensions MIL-STD-348A</td><td>Temperature Rating -65°C to +105°C</td></tr><tr><td>Frequency Range (GHz) DC to 26.5</td><td>Recommended Mating</td><td>Vibration MIL-STD-202, Method 204, Condition D</td></tr><tr><td>Volt Rating (VRMS MAX)</td><td>Torque 7 to 8 In - Lbs</td><td>Shock MIL-STD-202, Method 213, Condition I</td></tr><tr><td>0 Sea Level 250</td><td>Mating Characteristics:</td><td>Thermal Shock MIL-STD-202, Method 107, Condition B, Except High Temp +115°C</td></tr><tr><td>VSWR 1.035 + .005f(GHz)</td><td>Insertion (MAX Lbs) N/A</td><td>Moisture Resistance MIL-STD-202, Method 106, Except Vibration</td></tr><tr><td>Insertion Loss (dB MAX) .03√f(GHz)</td><td>Withdrawal (MIN Oz) N/A</td><td>Shall Be Omitted</td></tr><tr><td>RF Leakage (dB MIN) -[90-f(GHz)]</td><td>Force to Engage and</td><td>Corrosion - MIL-STD-202, Method 101, Condition B, 5% salt spray</td></tr><tr><td>Corona, 70,000 Ft (VRMS MIN) 190</td><td>Disengage (In/Lbs MAX) 2.0</td><td></td></tr><tr><td>Dielectric Withstanding Voltage</td><td>Center Contact Captivation</td><td></td></tr><tr><td>(VRMS MIN) 0 Sea Level 750</td><td>Axial (Lbs) N/A</td><td></td></tr><tr><td>Contact Resistance (Milliohms MAX)</td><td>Radial (In/Oz) N/A</td><td></td></tr><tr><td>Center Contact 2.0</td><td>Cable Retention</td><td></td></tr><tr><td>Outer Contact 2.0</td><td>Axial Force (Lbs) 30</td><td></td></tr><tr><td>Cable to Housing 0.5</td><td>Torque (In/Oz) 16</td><td></td></tr><tr><td>RF High Potential 0 Sea Level</td><td>Weight (Grams) 1.0</td><td></td></tr><tr><td>(VRMS MIN 0 5 MHz) 500</td><td></td><td></td></tr><tr><td>I.R.(Megohms MIN) N/A</td><td></td><td></td></tr></table>		ELECTRICAL	MECHANICAL	ENVIRONMENTAL	Nominal Impedance (Ohms) 50	Interface Dimensions MIL-STD-348A	Temperature Rating -65°C to +105°C	Frequency Range (GHz) DC to 26.5	Recommended Mating	Vibration MIL-STD-202, Method 204, Condition D	Volt Rating (VRMS MAX)	Torque 7 to 8 In - Lbs	Shock MIL-STD-202, Method 213, Condition I	0 Sea Level 250	Mating Characteristics:	Thermal Shock MIL-STD-202, Method 107, Condition B, Except High Temp +115°C	VSWR 1.035 + .005f(GHz)	Insertion (MAX Lbs) N/A	Moisture Resistance MIL-STD-202, Method 106, Except Vibration	Insertion Loss (dB MAX) .03√f(GHz)	Withdrawal (MIN Oz) N/A	Shall Be Omitted	RF Leakage (dB MIN) -[90-f(GHz)]	Force to Engage and	Corrosion - MIL-STD-202, Method 101, Condition B, 5% salt spray	Corona, 70,000 Ft (VRMS MIN) 190	Disengage (In/Lbs MAX) 2.0		Dielectric Withstanding Voltage	Center Contact Captivation		(VRMS MIN) 0 Sea Level 750	Axial (Lbs) N/A		Contact Resistance (Milliohms MAX)	Radial (In/Oz) N/A		Center Contact 2.0	Cable Retention		Outer Contact 2.0	Axial Force (Lbs) 30		Cable to Housing 0.5	Torque (In/Oz) 16		RF High Potential 0 Sea Level	Weight (Grams) 1.0		(VRMS MIN 0 5 MHz) 500			I.R.(Megohms MIN) N/A			HOUSING COUPLING NUT RETAINING RING GASKET		STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303 STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303 BERYLLIUM COPPER PER ASTM B 196, ALLOY C17300, CONDITION H SILICONE RUBBER PER ZZ-R-765		GOLD PLATE PER MIL-G-45204 PASSIVATE PER ASTM-A380 N/A N/A	
ELECTRICAL	MECHANICAL	ENVIRONMENTAL																																																											
Nominal Impedance (Ohms) 50	Interface Dimensions MIL-STD-348A	Temperature Rating -65°C to +105°C																																																											
Frequency Range (GHz) DC to 26.5	Recommended Mating	Vibration MIL-STD-202, Method 204, Condition D																																																											
Volt Rating (VRMS MAX)	Torque 7 to 8 In - Lbs	Shock MIL-STD-202, Method 213, Condition I																																																											
0 Sea Level 250	Mating Characteristics:	Thermal Shock MIL-STD-202, Method 107, Condition B, Except High Temp +115°C																																																											
VSWR 1.035 + .005f(GHz)	Insertion (MAX Lbs) N/A	Moisture Resistance MIL-STD-202, Method 106, Except Vibration																																																											
Insertion Loss (dB MAX) .03√f(GHz)	Withdrawal (MIN Oz) N/A	Shall Be Omitted																																																											
RF Leakage (dB MIN) -[90-f(GHz)]	Force to Engage and	Corrosion - MIL-STD-202, Method 101, Condition B, 5% salt spray																																																											
Corona, 70,000 Ft (VRMS MIN) 190	Disengage (In/Lbs MAX) 2.0																																																												
Dielectric Withstanding Voltage	Center Contact Captivation																																																												
(VRMS MIN) 0 Sea Level 750	Axial (Lbs) N/A																																																												
Contact Resistance (Milliohms MAX)	Radial (In/Oz) N/A																																																												
Center Contact 2.0	Cable Retention																																																												
Outer Contact 2.0	Axial Force (Lbs) 30																																																												
Cable to Housing 0.5	Torque (In/Oz) 16																																																												
RF High Potential 0 Sea Level	Weight (Grams) 1.0																																																												
(VRMS MIN 0 5 MHz) 500																																																													
I.R.(Megohms MIN) N/A																																																													
		COMPONENT	MATERIAL		FINISH																																																								
		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE ON FRAC. DEC. ANGLES ± 1/64 ± .005 ± 1°	DRAWN BY TEM 11-30-76 CHECKED BY ECA 12-1-76 APPROVED BY RMF 12-1-76		AMP Incorporated 140 Fourth Avenue Waltham, MA 02451-7599																																																								
		These drawings and specifications are the property of Omni Spectra Incorporated and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.	USE ASS'Y PROCEDURE NO. AP. 10-001 (408-04796)		TITLE OSSM STRAIGHT CABLE PLUG - DIRECT SOLDER ATTACHMENT																																																								
			SIZE B	CODE IDENT NO. 26805	1001-7985-02	REV 01 ₃																																																							
			SCALE 10 : 1		SHEET 1 OF 1																																																								

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1001-7985-02](#)