



Bestückungsplan / contact layout

■ bestückt / assemble

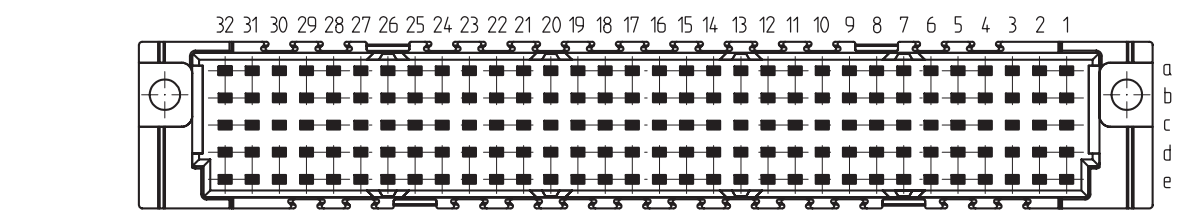

Leiterplatten-Lochbild / PCB drillhole pattern

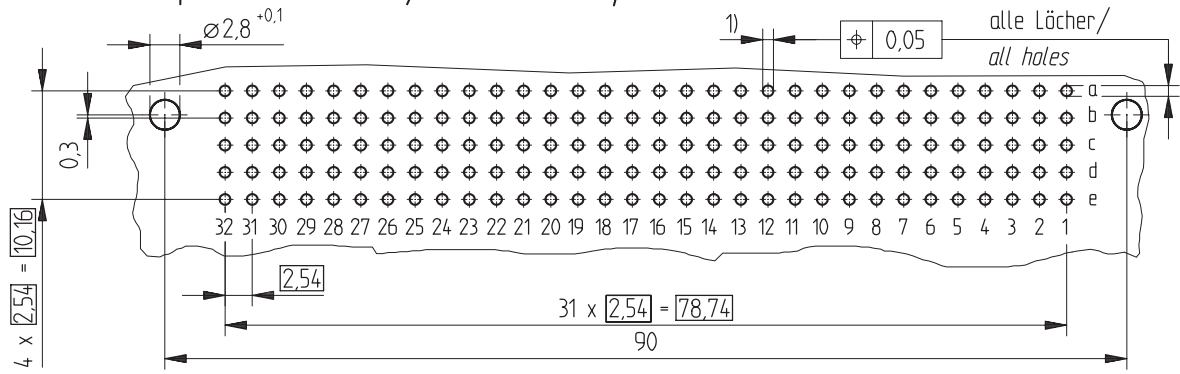

Elastische Einpresszone mit Übergabesteckzone / compliant pressfit zone with mating transfer zone  
 Isolierwerkstoff / housing material : PBT GF30  
 Bauart 7 / type 7  
 Anforderungsstufe 2 = 400 Steckzyklen / performance class 2 = 400 mating cycles  
 Fehlende Masse und Angaben gemäß IEC 60 603-2 / DIN EN 60 603-2  
 Missing information and dimensions according to IEC 60 603-2 / DIN EN 60 603-2  
 Schichtaufbau im metallisierten Loch siehe Zeichnung 164062/Nr.6  
 diameter of drilled hole see drawing 164062/Na.6  
 1)  $\varnothing 1,0 \pm 0,09$  Durchmesser des metallisierten Loches  
 $\varnothing 1,0 \pm 0,06$  Diameter of finished plated-through hole  
 $\varnothing 1,15 \pm 0,025$  Bohrungsdurchmesser des Loches  
 $\varnothing 1,15 \pm 0,025$  Diameter of drilled hole

Information: All rights reserved. Only for information. To insure that this is the latest version of this drawing, please contact one of the ERNI companies before using.	Tolerances All Dimensions in mm	Scale 2:1
	Subject to modification without prior notice. Drawing will not be updated.	
www.ERNI.com	Designation Federleiste E 160 EE Fem. Connector E 160 Pressfit	
	254960	
Index	Date	H:00062257.SZA
		STVE

Consider protection memo from DIN 34

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[254960](#)