


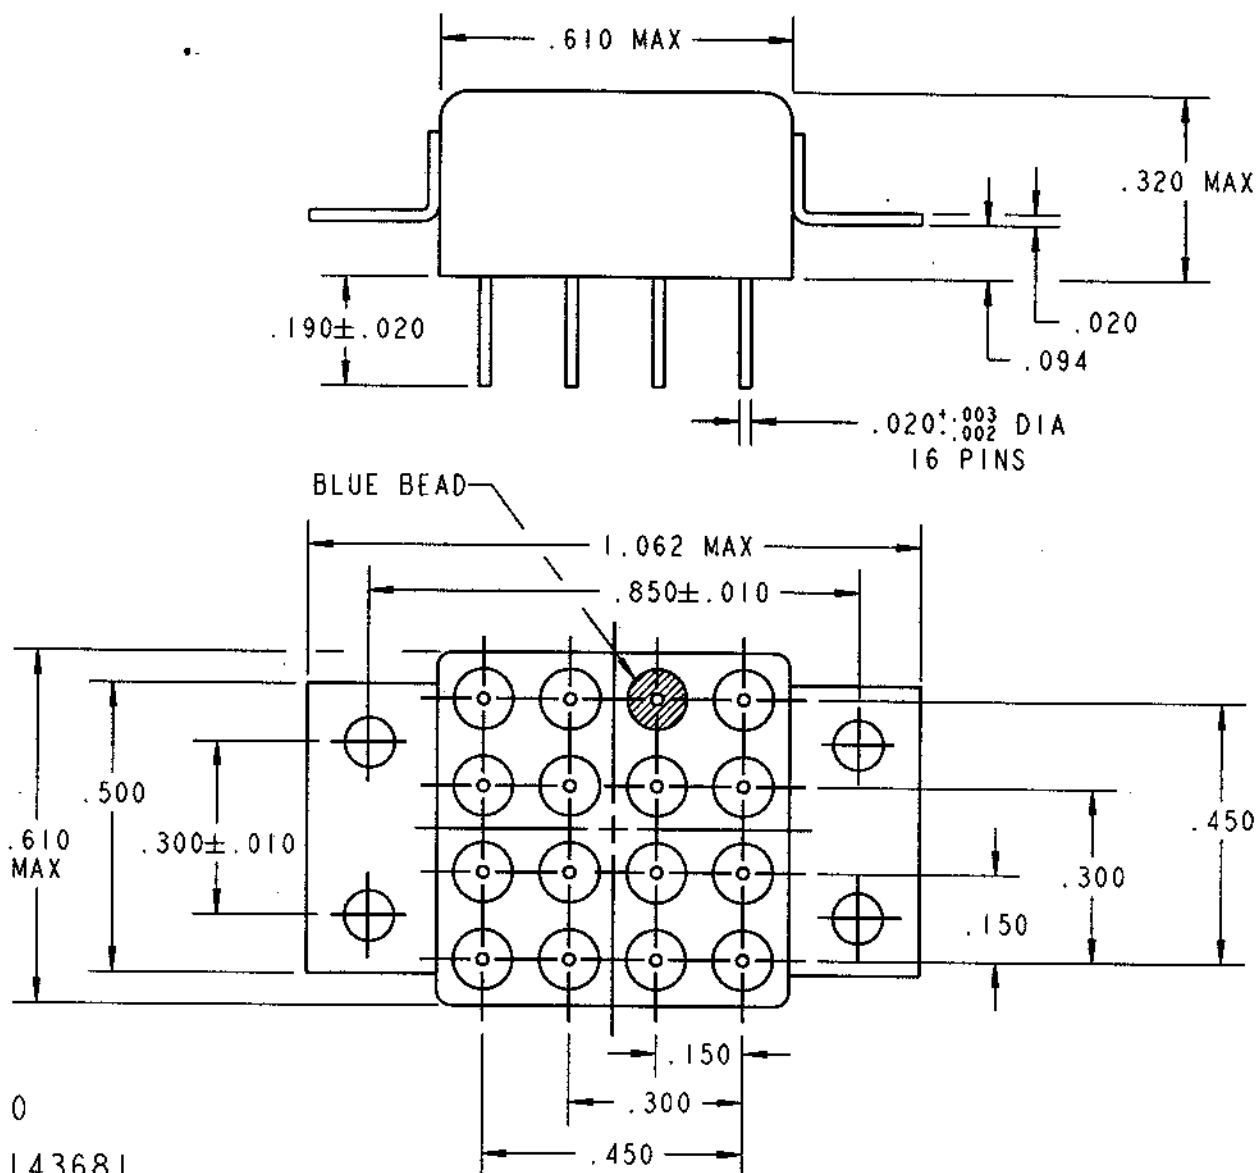

COIL: @ 25°C

SET	RESET
975 OHMS ±10%	975 OHMS ±10%
26.5 VDC NOMINAL VOLTAGE	26.5 VDC NOMINAL VOLTAGE
13.5 VDC MUST OPERATE	13.5 VDC MUST OPERATE

ENVIRONMENT:

VIBRATION 10 Hz 3000 Hz 30 g's

SHOCK 150 g's 11 MS. DURATION


TEMPERATURE -65 °C TO +125 °C

NOTES: SET/RESET 4 MS MAX
CONTACT BOUNCE 1.5 MS MAX

CUST. CII STD
CUST. NO.

TYPE "3SBM" RELAY

CUSTOMER DATA SHEET

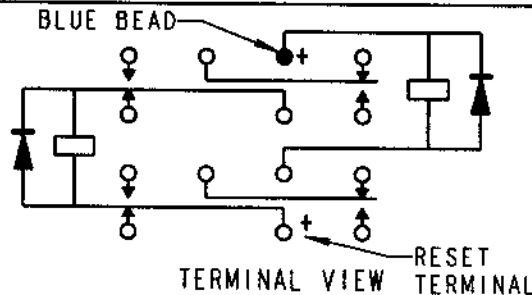

CONTACT RATING: LOW LEVEL TO
2 AMPS 28 VDC RESISTIVE
100,000 OPERATIONS

DR. ASB 31 OCT 02 CK 103103

CII Technologies
advanced control electronic solutions

3SBM5134V5

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3SBM5134V5](#)