


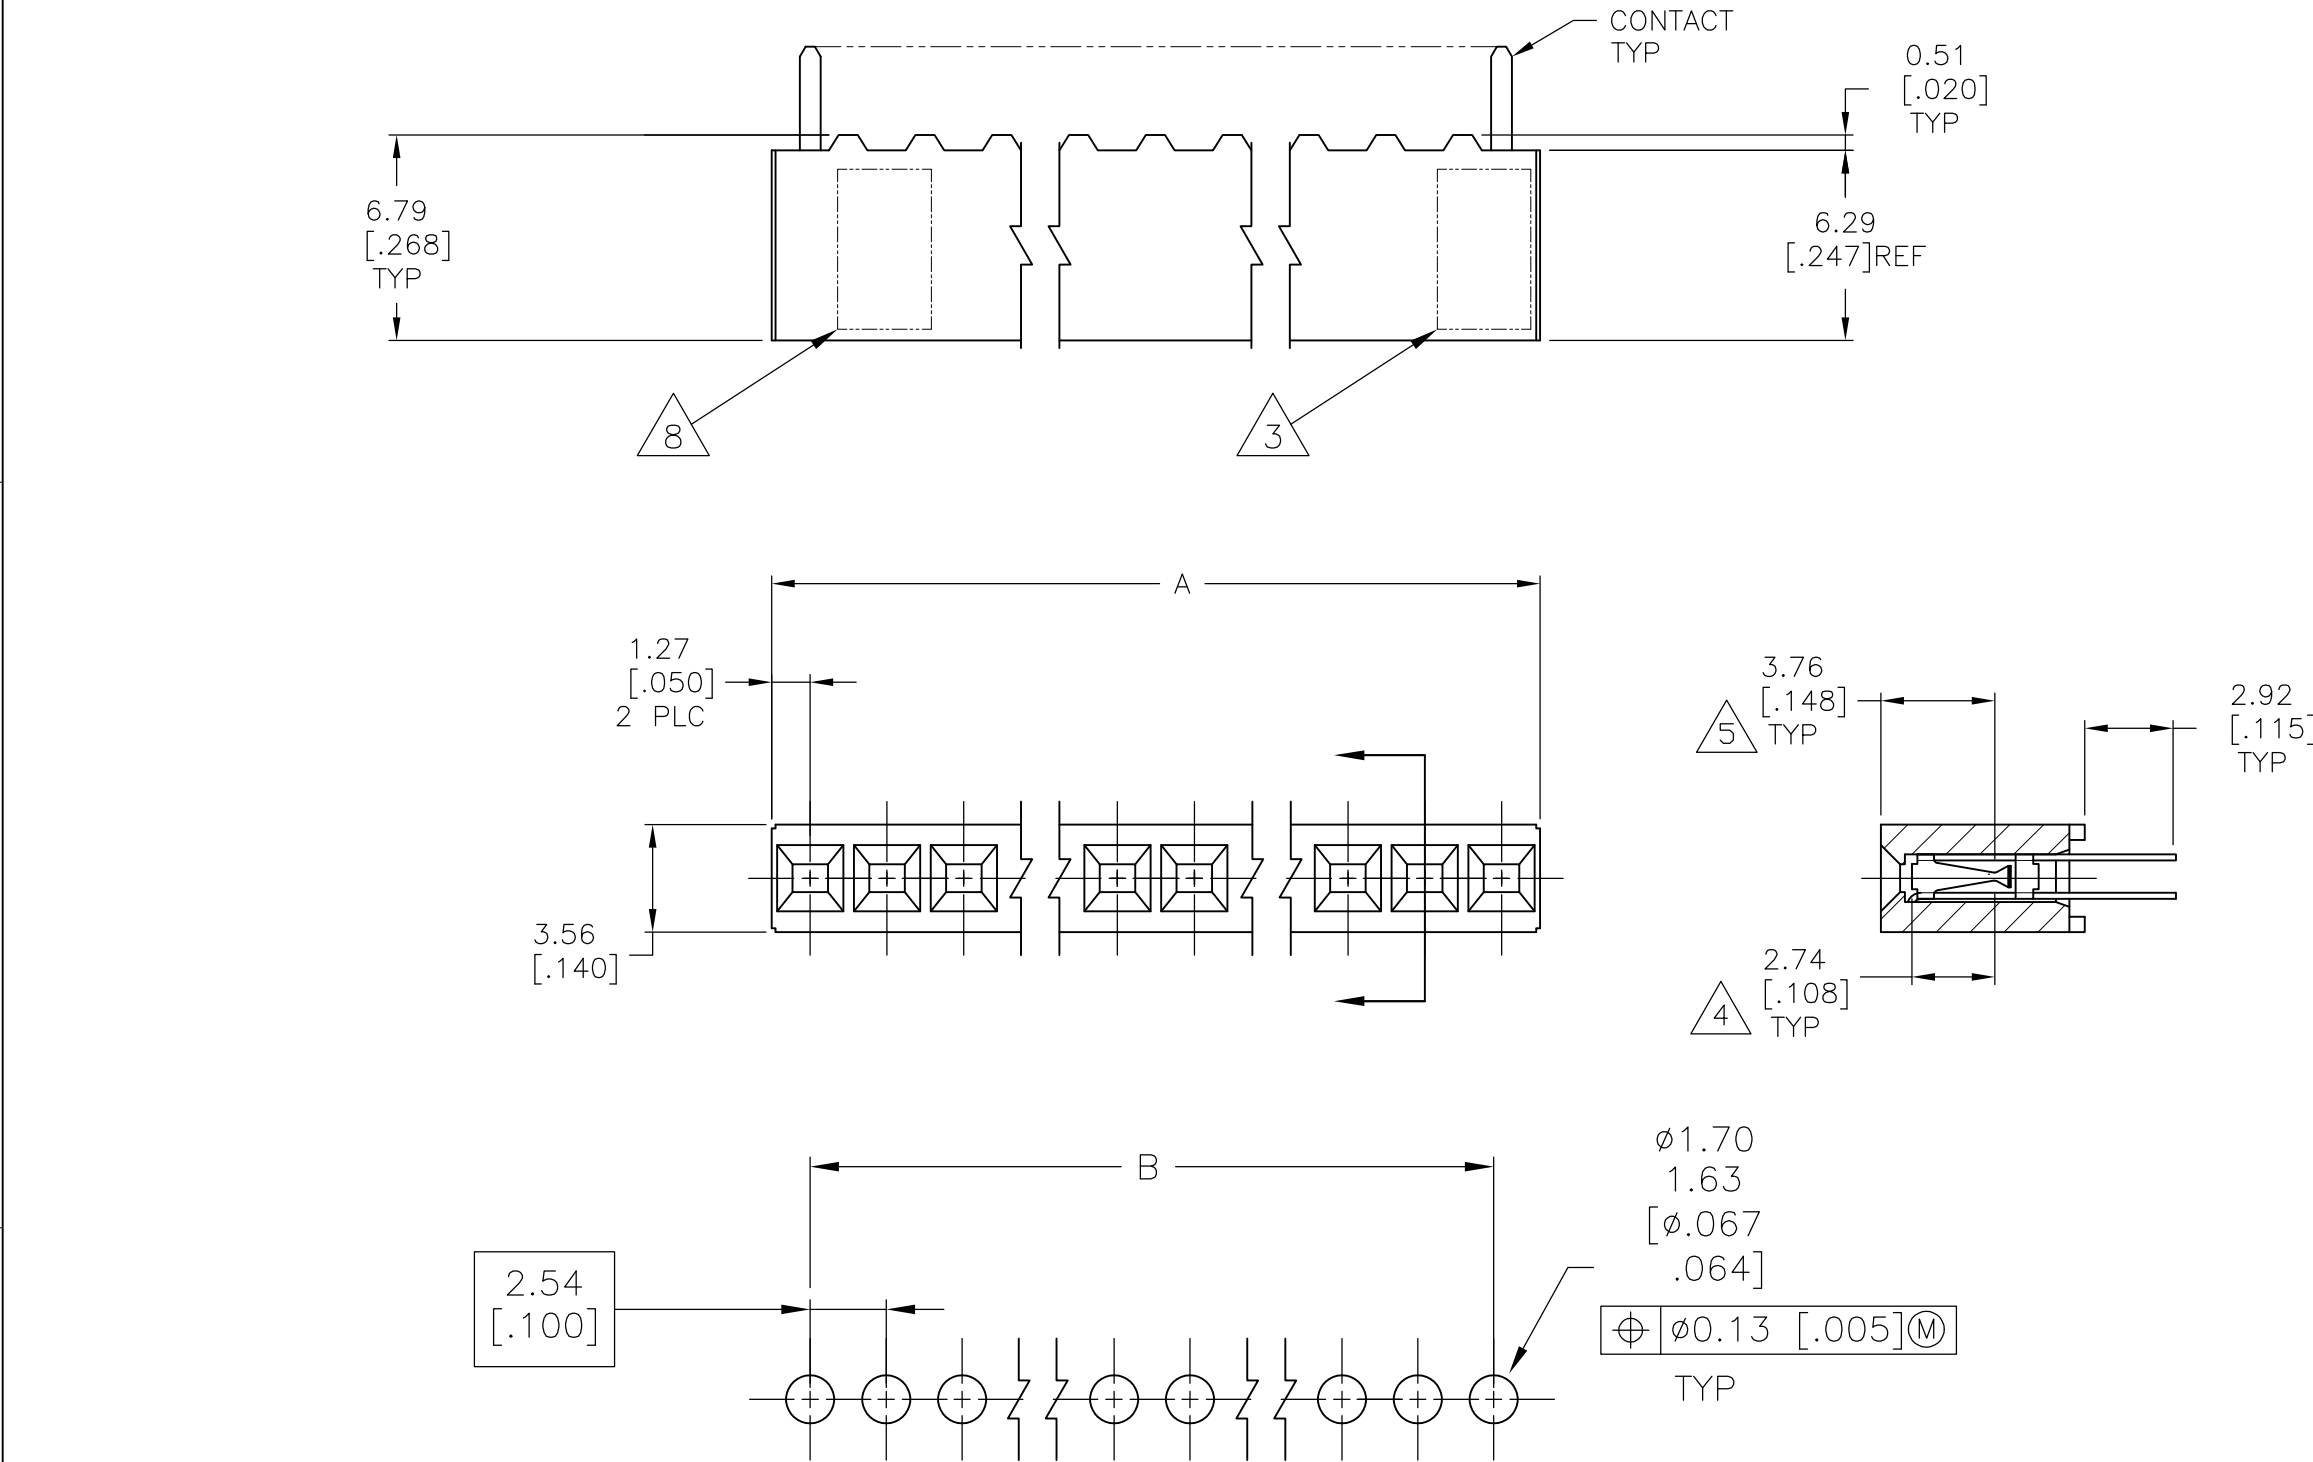

RECOMMENDED PC BOARD HOLE PATTERN

PC BOARD THICKNESS 1.57 [.062]

- 1 HOUSING: GLASS FILLED FLAME RETARDANT POLYSTER, COLOR BLACK, CONTACTS: PHOSPHOR BRONZE.
- 2 CONTACTS: DUPLEX PLATED 0.76 MICROMETERS [.000030] GOLD IN CONTACT AREA 3.81-7.62 MICROMETERS [.000150-.000300] BRIGHT TIN-LEAD ON SOLDER LEADS. ALL OVER 1.27 [.000050] MIN NICKEL.
- 3 TE CONNECTIVITY, CSA LOGO MOLDED INTO HOUSING.
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS, MEASURED INSIDE CONTACT BEAMS
- 5 POINT OF CONTACT DIMENSION.
- 6 CONTACTS: DUPLEX PLATED 0.76 MICROMETERS (.000030) GOLD IN CONTACT AREA 3.81-7.62 MICROMETERS (.000150-.000300) MATTE TIN ON SOLDER LEADS. ALL OVER 1.27 (.000050) MIN NICKEL.
- 7 ROHS 2002 /95/EC COMPLIANT.
- 8 PART NUMBER AND DATE CODE MARKED IN APPROXIMATE LOCATION SHOWN.
- 9 NO PART NUMBER MARKING REQUIRED FOR THIS PART.
- 10 FOR 2 POS, DATE CODES MARKED OPPOSITE SIDE OF TE CONNECTIVITY LOGO.
- 11 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

2	5.08 [.200]	2.54 [.100]	2	9	3-87879-9
2	12.70 [.500]	10.16 [.400]	5	9	3-87879-8
2	7.62 [.300]	5.08 [.200]	3	9	3-87879-7
2	10.16 [.400]	7.62 [.300]	4	9	3-87879-6
2	101.60 [4.000]	99.06 [3.900]	40		3-87879-5
2	99.06 [3.900]	96.52 [3.800]	39		3-87879-4
2	96.52 [3.800]	93.98 [3.700]	38		3-87879-3
2	93.98 [3.700]	91.44 [3.600]	37		3-87879-2
2	91.44 [3.600]	88.90 [3.500]	36		3-87879-1
2	88.90 [3.500]	86.36 [3.400]	35		3-87879-0
2	86.36 [3.400]	83.82 [3.300]	34		2-87879-9
2	83.82 [3.300]	81.28 [3.200]	33		2-87879-8
2	81.28 [3.200]	78.74 [3.100]	32		2-87879-7
2	78.74 [3.100]	76.20 [3.000]	31		2-87879-6
2	76.20 [3.000]	73.66 [2.900]	30		2-87879-5
2	73.66 [2.900]	71.12 [2.800]	29		2-87879-4
2	71.12 [2.800]	68.58 [2.700]	28		2-87879-3
2	68.58 [2.700]	66.04 [2.600]	27		2-87879-2
2	66.04 [2.600]	63.50 [2.500]	26		2-87879-1
2	63.50 [2.500]	60.96 [2.400]	25		2-87879-0
2	60.96 [2.400]	58.42 [2.300]	24		1-87879-9
2	58.42 [2.300]	55.88 [2.200]	23		1-87879-8
2	55.88 [2.200]	53.34 [2.100]	22		1-87879-7
2	53.34 [2.100]	50.80 [2.000]	21		1-87879-6
2	50.80 [2.000]	48.26 [1.900]	20		1-87879-5
2	48.26 [1.900]	45.72 [1.800]	19		1-87879-4
2	45.72 [1.800]	43.18 [1.700]	18		1-87879-3
2	43.18 [1.700]	40.64 [1.600]	17		1-87879-2
2	40.64 [1.600]	38.10 [1.500]	16		1-87879-1
2	38.10 [1.500]	35.56 [1.400]	15		1-87879-0
2	35.56 [1.400]	33.02 [1.300]	14		87879-9
2	33.02 [1.300]	30.48 [1.200]	13		87879-8
2	30.48 [1.200]	27.94 [1.100]	12		87879-7
2	27.94 [1.100]	25.40 [1.000]	11		87879-6
2	22.86 [.900]	20.32 [.800]	9		87879-5
2	17.78 [.700]	15.24 [.600]	7		87879-4
2	15.24 [.600]	12.70 [.500]	6		87879-3
2	25.40 [1.00]	22.86 [.900]	10		87879-2
2	20.32 [.800]	17.78 [.700]	8		87879-1
FINISH	A	B	NO OF POSN	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± .127 [.005]
4 PLC ± -
ANGLES ± -
FINISH

1

2

6

DWN J KNAUB 12-20-93

CHK A GABANY 6-28-94

APVD -

PRODUCT SPEC 108-25022

APPLICATION SPEC 114-25018

WEIGHT -

CUSTOMER DRAWING

TE Connectivity

CONNECTOR ASSEMBLY, MOD IV, SINGLE ROW .100CL, DUAL ENTRY

SIZE A2 CAGE CODE 00779 DRAWING NO C=87879

RESTRICTED TO -

SCALE 4:1


SHEET 1 of 2

REV AA3

THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	- , -
© COPYRIGHT - By -	ALL RIGHTS RESERVED.	

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			—	SEE SHEET 1	—	—	—

	 10	 9	 6	5.08[.200]	2.54[.100]	2	 7	8-87879-9		
 9	OBSOLETE		 6	12.70[.500]	10.16[.400]	5	 7	8-87879-8		
	 9		 6	7.62[.300]	5.08[.200]	3	 7	8-87879-7		
 9	OBSOLETE		 6	10.16[.400]	7.62[.300]	4	 7	8-87879-6		
	OBSOLETE		 6	101.60[4.000]	99.06[3.900]	40	 7	8-87879-5		
			 6	99.06[3.900]	96.52[3.800]	39	 7	8-87879-4		
			 6	96.52[3.800]	93.98[3.700]	38	 7	8-87879-3		
			 6	93.98[3.700]	91.44[3.600]	37	 7	8-87879-2		
			 6	91.44[3.600]	88.90[3.500]	36	 7	8-87879-1		
			 6	88.90[3.500]	86.36[3.400]	35	 7	8-87879-0		
			 6	86.36[3.400]	83.82[3.300]	34	 7	7-87879-9		
			 6	83.82[3.300]	81.28[3.200]	33	 7	7-87879-8		
			 6	81.28[3.200]	78.74[3.100]	32	 7	7-87879-7		
			 6	78.74[3.100]	76.20[3.000]	31	 7	7-87879-6		
			 6	76.20[3.000]	73.66[2.900]	30	 7	7-87879-5		
			 6	73.66[2.900]	71.12[2.800]	29	 7	7-87879-4		
			 6	71.12[2.800]	68.58[2.700]	28	 7	7-87879-3		
			 6	68.58[2.700]	66.04[2.600]	27	 7	7-87879-2		
			 6	66.04[2.600]	63.50[2.500]	26	 7	7-87879-1		
			 6	63.50[2.500]	60.96[2.400]	25	 7	7-87879-0		
			OBSOLETE		 6	60.96[2.400]	58.42[2.300]	24	 7	6-87879-9
					 6	58.42[2.300]	55.88[2.200]	23	 7	6-87879-8
	 6	55.88[2.200]			53.34[2.100]	22	 7	6-87879-7		
	 6	53.34[2.100]			50.80[2.000]	21	 7	6-87879-6		
	 6	50.80[2.000]			48.26[1.900]	20	 7	6-87879-5		
	 6	48.26[1.900]			45.72[1.800]	19	 7	6-87879-4		
	 6	45.72[1.800]			43.18[1.700]	18	 7	6-87879-3		
	 6	43.18[1.700]			40.64[1.600]	17	 7	6-87879-2		
	 6	40.64[1.600]			38.10[1.500]	16	 7	6-87879-1		
	OBSOLETE		 6	38.10[1.500]	35.56[1.400]	15	 7	6-87879-0		
			 6	35.56[1.400]	33.02[1.300]	14	 7	5-87879-9		
			 6	33.02[1.300]	30.48[1.200]	13	 7	5-87879-8		
			 6	30.48[1.200]	27.94[1.100]	12	 7	5-87879-7		
			 6	27.94[1.100]	25.40[1.000]	11	 7	5-87879-6		
	OBSOLETE		 6	22.86[.900]	20.32[.800]	9	 7	5-87879-5		
			 6	17.78[.700]	15.24[.600]	7	 7	5-87879-4		
			 6	15.24[.600]	12.70[.500]	6	 7	5-87879-3		
			 6	25.40[1.00]	22.86[.900]	10	 7	5-87879-2		
	OBSOLETE	 6	20.32[.800]	17.78[.700]	8	 7	5-87879-1			
		FINISH	A	B	NO OF POSN	PART NUMBER				

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 12-20-93 J KNAUB CHK 6-28-94 A GABANY		 TE Connectivity			
DIMENSIONS: mm [INCHES]		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		NAME CONNECTOR ASSEMBLY, MOD IV, SINGLE ROW .100CL, DUAL ENTRY			
		0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .127[.005] 4 PLC ± - ANGLES ± ±		PRODUCT SPEC 108-25022		APPLICATION SPEC 114-25018	
MATERIAL 		FINISH 		WEIGHT -		SIZE A2	
				CAGE CODE 00779		DRAWING NO C=87879	
				RESTRICTED TO -			
CUSTOMER DRAWING						SCALE 1:1	
						SHEET 2 of 2	
						REV AA3	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-87879-2](#)