



LOC		DIST		REVISIONS					
CE		00		P	LTR	DESCRIPTION	DATE	DWN	APVD
			B1	REVISED PER ECO-11-005027			29APR11	RK	HMR

PERFORMANCE REQUIREMENTS:
OPERATING WAVELENGTH : 1310/1550 ±25nm
REFLECTANCE : ≤ -55dB
OPERATING TEMPERATURE : -40°C TO +75°C
ATTENUATION TOLERANCE, AMBIENT :
FOR 0 dB ATTENUATORS : + 0.50dB MAX
FOR ATTENUATORS ≤ 5dB : ± 0.50dB
FOR ATTENUATORS >5dB : ± 10% OF NOMINAL ATTENUATION VALUE
MEASURED WITH REFERENCE QUALITY LAUNCH LEADS

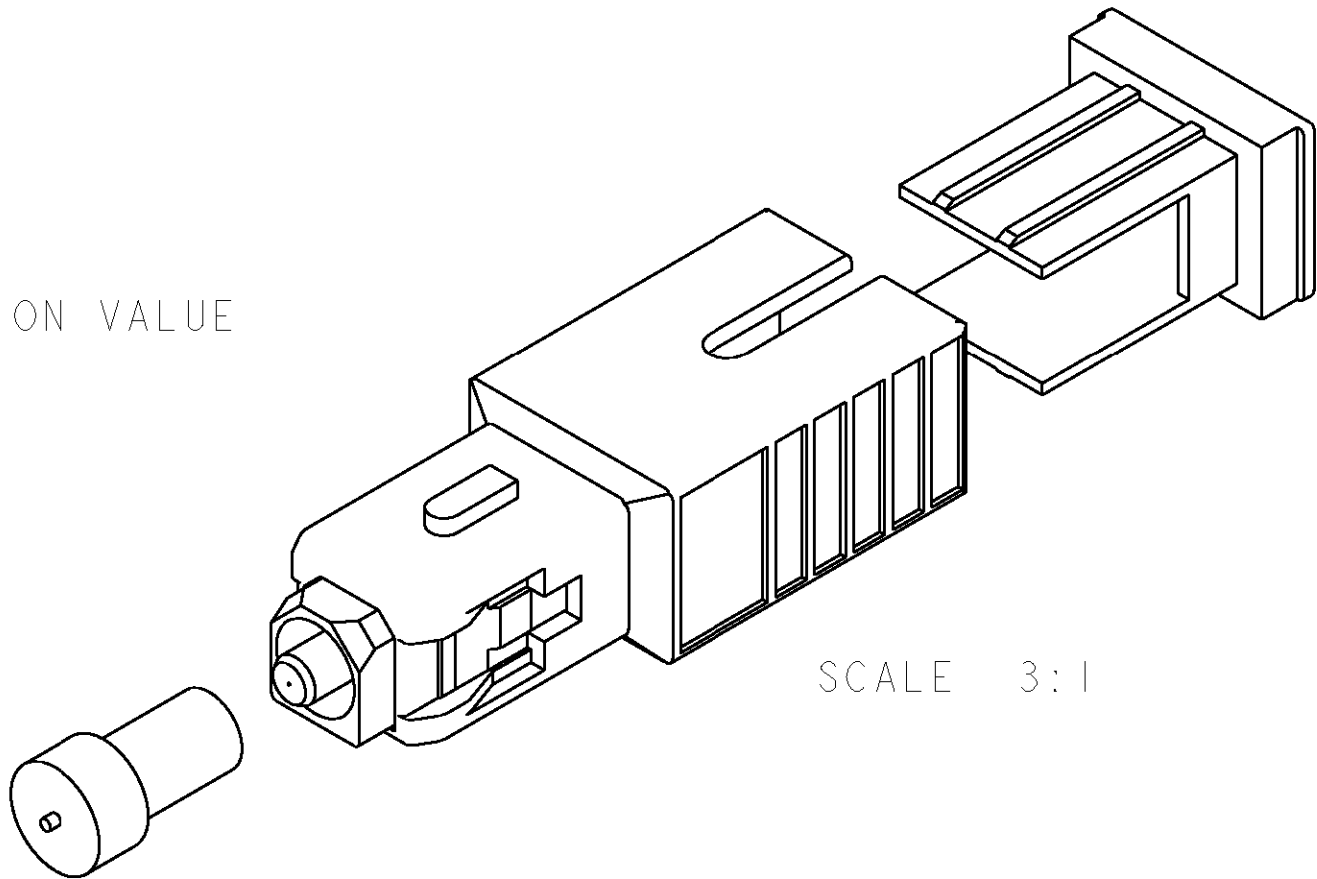

SCALE 3:1

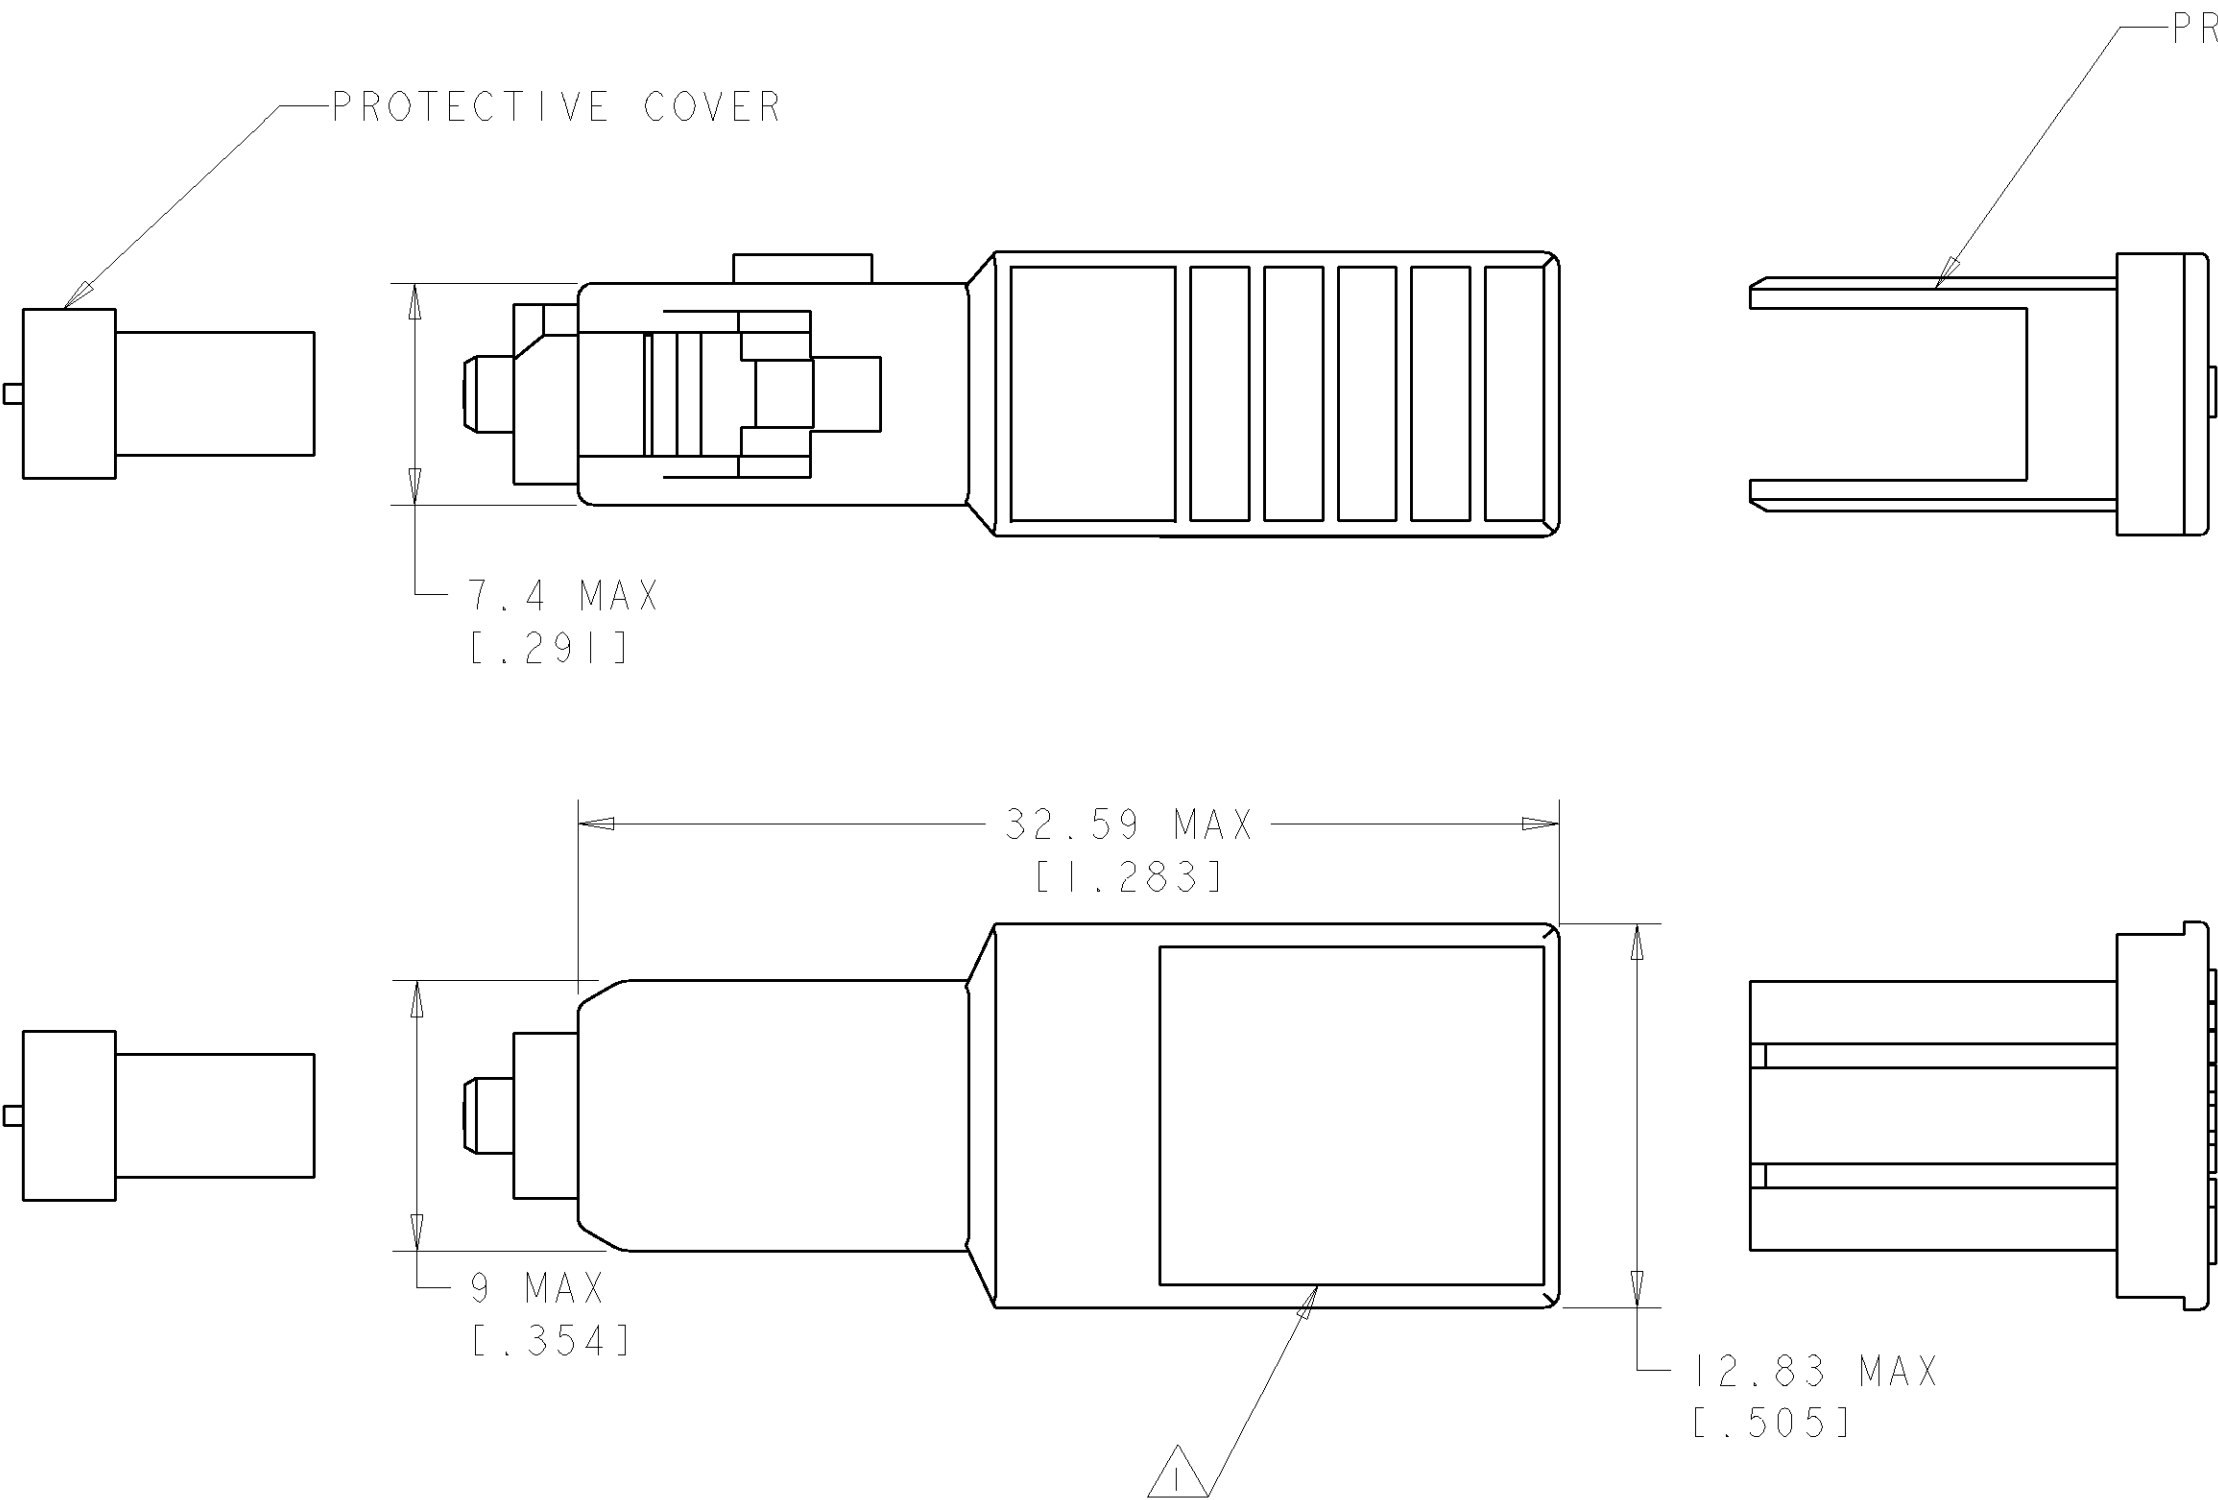

NOMINAL ATTENUATION VALUE (dB)	PART NUMBER
0	9-5209943-9
1	5209943-1
2	5209943-2
3	5209943-3
4	5209943-4
5	5209943-5
6	5209943-6
7	5209943-7
8	5209943-8
9	5209943-9
10	1-5209943-0
11	1-5209943-1
12	1-5209943-2
13	1-5209943-3
14	1-5209943-4
15	1-5209943-5
16	1-5209943-6
17	1-5209943-7
18	1-5209943-8
19	1-5209943-9
20	2-5209943-0
25	2-5209943-5

⚠ TYCO LOGO, ATTENUATION VALUE, PART NUMBER, AND SERIAL NUMBER ARE PRINTED ON THE LABEL.

DIMENSIONS: mm[INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DWN E. HOPKINS 05DEC2005	TE Connectivity			
				CHK E. HOPKINS 05DEC2005				
				APVD S. BUCHTER 05DEC2005	NAME			
				PRODUCT SPEC	ATTENUATOR, FOPC BOA SC/UPC DW SM			
				APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
				WEIGHT	A2	00779	5209943	-
				CUSTOMER DRAWING	SCALE	4	SHEET	OF
								REV B1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-5209943-9](#)