




2. JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F.
3. SUGGESTED PANEL OPENING DIMENSIONS.
4. SUGGESTED CLEARANCE BETWEEN TOP OF CONNECTOR AND TOP PANEL OPENING.
5. SEE TABLE FOR COLOR OF LEDS AND NUMBER REQUIRED.
6. THIS MODULAR JACK WITH INTEGRATED LED IS NOT IR REFLOW SOLDERING PROCESS COMPATIBLE.

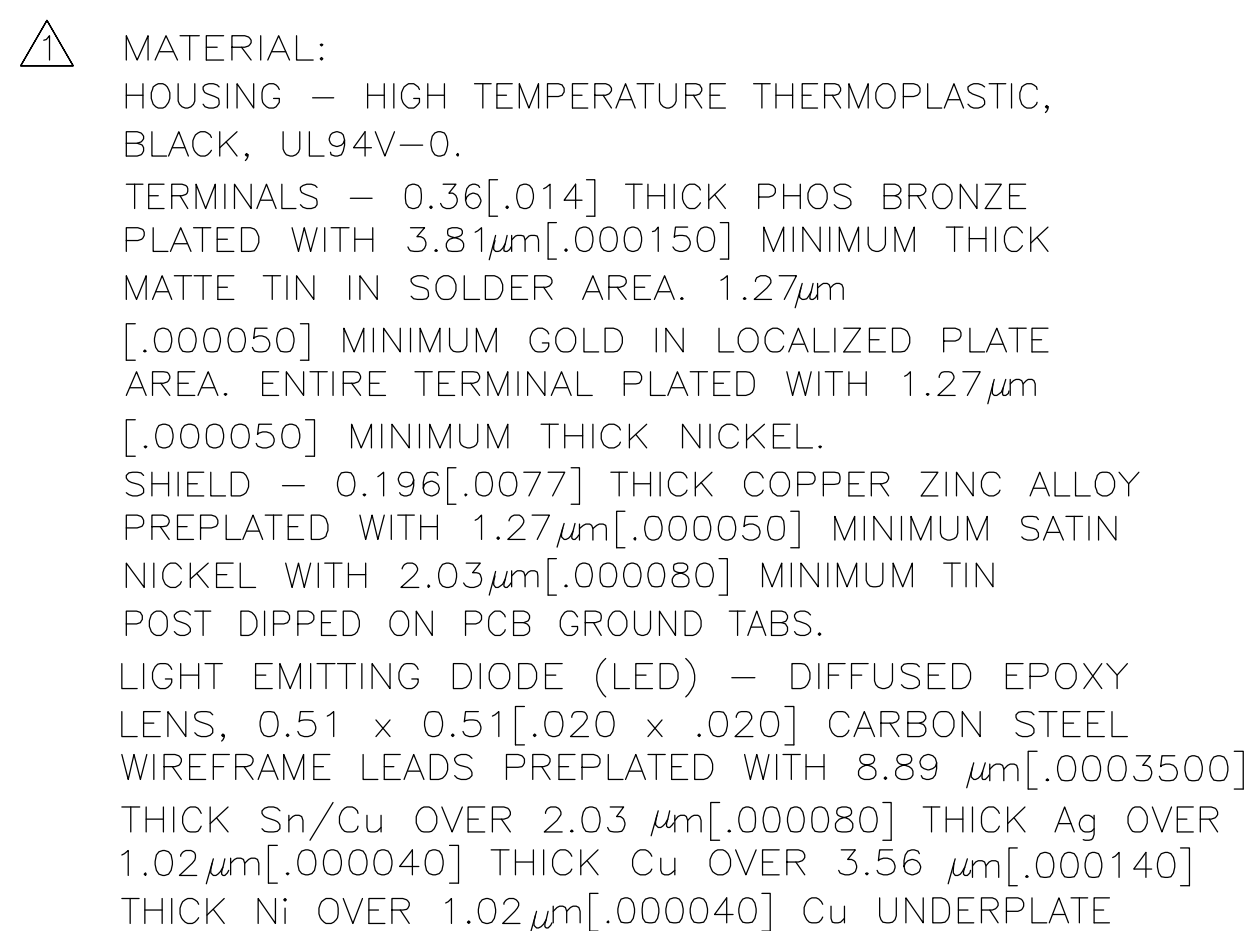

GREEN	YELLOW	6368460-4
POSITION 2	POSITION 1	PART NUMBER
INDICATOR COLOR FOR EACH HOUSING		

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 16JUN2005 L. VARELA - DOCKS		tyco Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: mm[inches]		CHK 16JUN2005 J. WESTMAN		NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 16JUN2005 S. FLICKINGER		INVERTED MODULAR JACK ASSEMBLY, 1X2, SHIELDED, PANEL GROUND, WITH LEDS	
0 PLC ± - 1 PLC ± - 2 PLC ± 0.25[.01] 3 PLC ± 0.13[.005] 4 PLC ± - ANGLES ± ±		PRODUCT SPEC 108-1163-4 APPLICATION SPEC 114-2154		SIZE GAGE CODE DRAWING NO RESTRICTED TO	
MATERIAL △		FINISH △		A1 100779 C=6368460 -	
CUSTOMER DRAWING				SCALE 4:1 SHEET 1 OF 1 REV A	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[6368460-4](#)