

SPECIFICATION CONTROL DRAWING

55A6287TITLE TWO CONDUCTOR CABLE, DOUBLE SHIELDED, JACKETED,
NORMAL WEIGHT, 600 VOLT

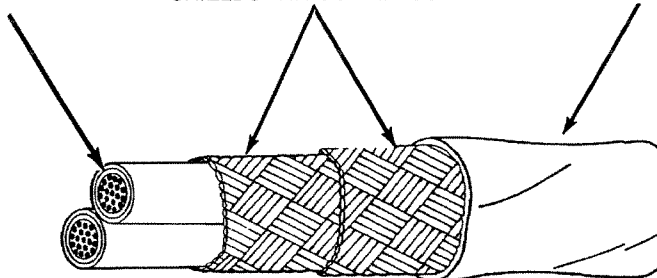
Date 12-12-00

Revision D

This specification sheet forms a part of the latest issue of Raychem Specification 55A.

COMPONENT WIRES - 55A0811

SHIELDS - TIN-COATED COPPER

JACKET - RADIATION-CROSSLINKED
MODIFIED ETFE

CABLE CONSTRUCTION DETAILS

PART NUMBER	CONDUCTOR SIZE (AWG)	1ST SHIELD SIZE (AWG)	2ND SHIELD SIZE (AWG)	JACKET THICKNESS (inch)		OUTSIDE DIAMETER (inch)		MAXIMUM WEIGHT (lb/1000 ft.)
				MINIMUM	MAXIMUM	NOMINAL	MAXIMUM	
55A6287-24-*	24	38	38	.005	.010	.140	.147	17.7
55A6287-22-*	22	38	38	.005	.010	.150	.158	20.6
55A6287-20-*	20	38	38	.005	.010	.166	.174	25.5
55A6287-18-*	18	38	38	.006	.011	.190	.200	33.4
55A6287-16-*	16	38	38	.006	.011	.204	.214	38.7
55A6287-14-*	14	38	38	.007	.012	.240	.252	53.1
55A6287-12-*	12	38	38	.007	.013	.274	.288	70.7
55A6287-10-*	10	38	36	.008	.014	.326	.342	106.

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 150°C

Maximum continuous conductor temperature

VOLTAGE RATING: 600 volts (rms)

BLOCKING: 200 ± 3°C for 6 hours

CROSSLINKED VERIFICATION: 300 ± 5°C for 6 hours

DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz

FLAMMABILITY:

Procedure 1, 3 seconds (maximum); 3 in. (maximum);
no flaming of facial tissue

JACKET COLOR: White preferred

JACKET ELONGATION AND TENSILE STRENGTH:

Elongation, 50% (minimum)

Tensile Strength, 5000 lbf/in² (minimum)

JACKET FLAWS:

Spark Test, 1500 volts (rms), 100% test

Impulse Dielectric Test, 6.0 kV (peak), 100% test

LOW TEMPERATURE-COLD BEND: -55 ± 5°C for 4 hours

SHIELD COVERAGE: 85% (minimum) (each)

VOLTAGE WITHSTAND TEST (POST ENVIRONMENTAL):

1000 volts (rms), 60 Hz, 1 minute

PART NUMBER:

The "*" in the part numbers above shall be replaced by a color
code designator with a slash separating the component wire
colors and a dash separating the component wire colors from
the jacket color.Example: AWG 22, white, white with blue stripe, component
wires; white jacket; 55A6287-22-9/96-9

This cable shall meet all constructional requirements of M27500 (AWGSD2V23).

NOTE: Nominal values are for information only.
Nominal values are not requirements.

COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681.

DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL.

RaychemRaychem Corporation
300 Constitution Drive, Menlo Park, California 94025
1-800-2 Raychem FAX: 1-650-361-6297

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[55A6287-10-9/96-9CS2275](#) [55A6287-20-9/96-9CS2275](#)