# 12 Watt Light Ring on OptoTherm® Linear Heat Spreader



### **OPA730** Series

#### Features:

- 12, 1 watt LEDs per ring
- Mono-color per ring (Blue, Green, Red, Yellow, White)
- Two component beam angle options (120° or 40°)
- Universal connector (Tyco 2-292173-2 mates with 173977-2)
- RoHS Compliant





#### **Description:**

The **OPA730** Series are designed for areas where light output and reliability are essential. The light beam angles of 40° and 120° are ideal for illuminating small and medium size areas while requiring minimal space.

A High Performance Heat Spreader (HPHS) is used to ensure the best heat dissipation of any light assembly in the industry.

OptoTherm<sup>®</sup> is designed to be the optimum material for distribution of heat for high power devices.

For custom colors and design contact your OPTEK representative.

#### Electrical / Optical Characteristics: T<sub>A</sub>=25°C, I<sub>F</sub>=700mA

| Part Number | Typical Forward Voltage (V) | Luminous Flux (lm) | Beam Angle | Color  | Dominant Wavelength |
|-------------|-----------------------------|--------------------|------------|--------|---------------------|
| OPA730Y     | 15.0                        | 420                | 120°       | Yellow | 587 nm              |
| OPA730B     | 21.6                        | 108                |            | Blue   | 470nm               |
| OPA730G     | 21.6                        | 576                |            | Green  | 530 nm              |
| OPA730R     | 15.0                        | 312                |            | Red    | 625 nm              |
| OPA730W     | 21.6                        | 576                |            | White  | 6500°K              |
| OPA730YD    | 15.0                        | 420                | 40°        | Yellow | 587 nm              |
| OPA730BD    | 21.6                        | 108                |            | Blue   | 470 nm              |
| OPA730GD    | 21.6                        | 576                |            | Green  | 530 nm              |
| OPA730RD    | 15.0                        | 312                |            | Red    | 625 nm              |
| OPA730WD    | 21.6                        | 576                |            | White  | 6500°K              |






DO NOT LOOK DIRECTLY AT LED WITH UNSHIELDED EYES OR DAMAGE TO RETINA MAY OCCUR.

# 12 Watt Light Ring on OptoTherm® Linear Heat Spreader



**OPA730** Series

OPA730\_ See OVSP\_BCR4 for component specifications.

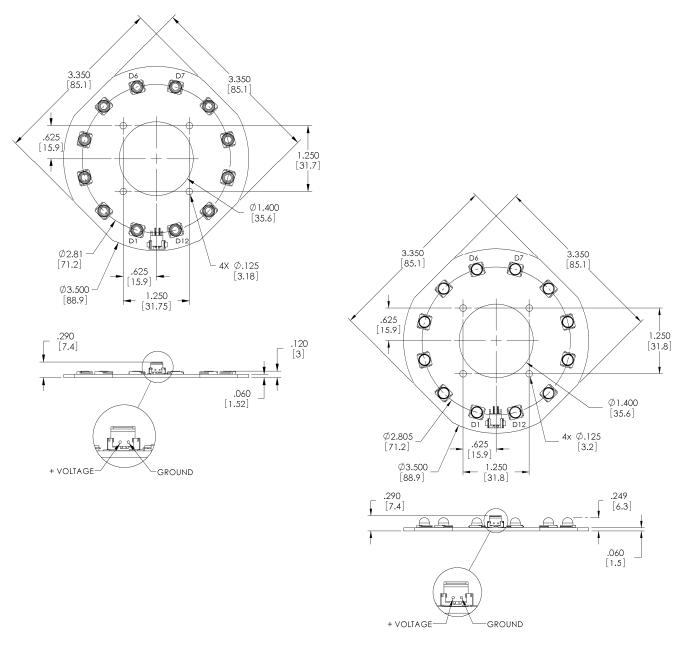

 $\label{eq:continuous} OPA730\_D$  See OVSP\_BCR44 for component specifications.

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## TT Electronics:

OPA730B OPA730G OPA730R OPA730W OPA730Y