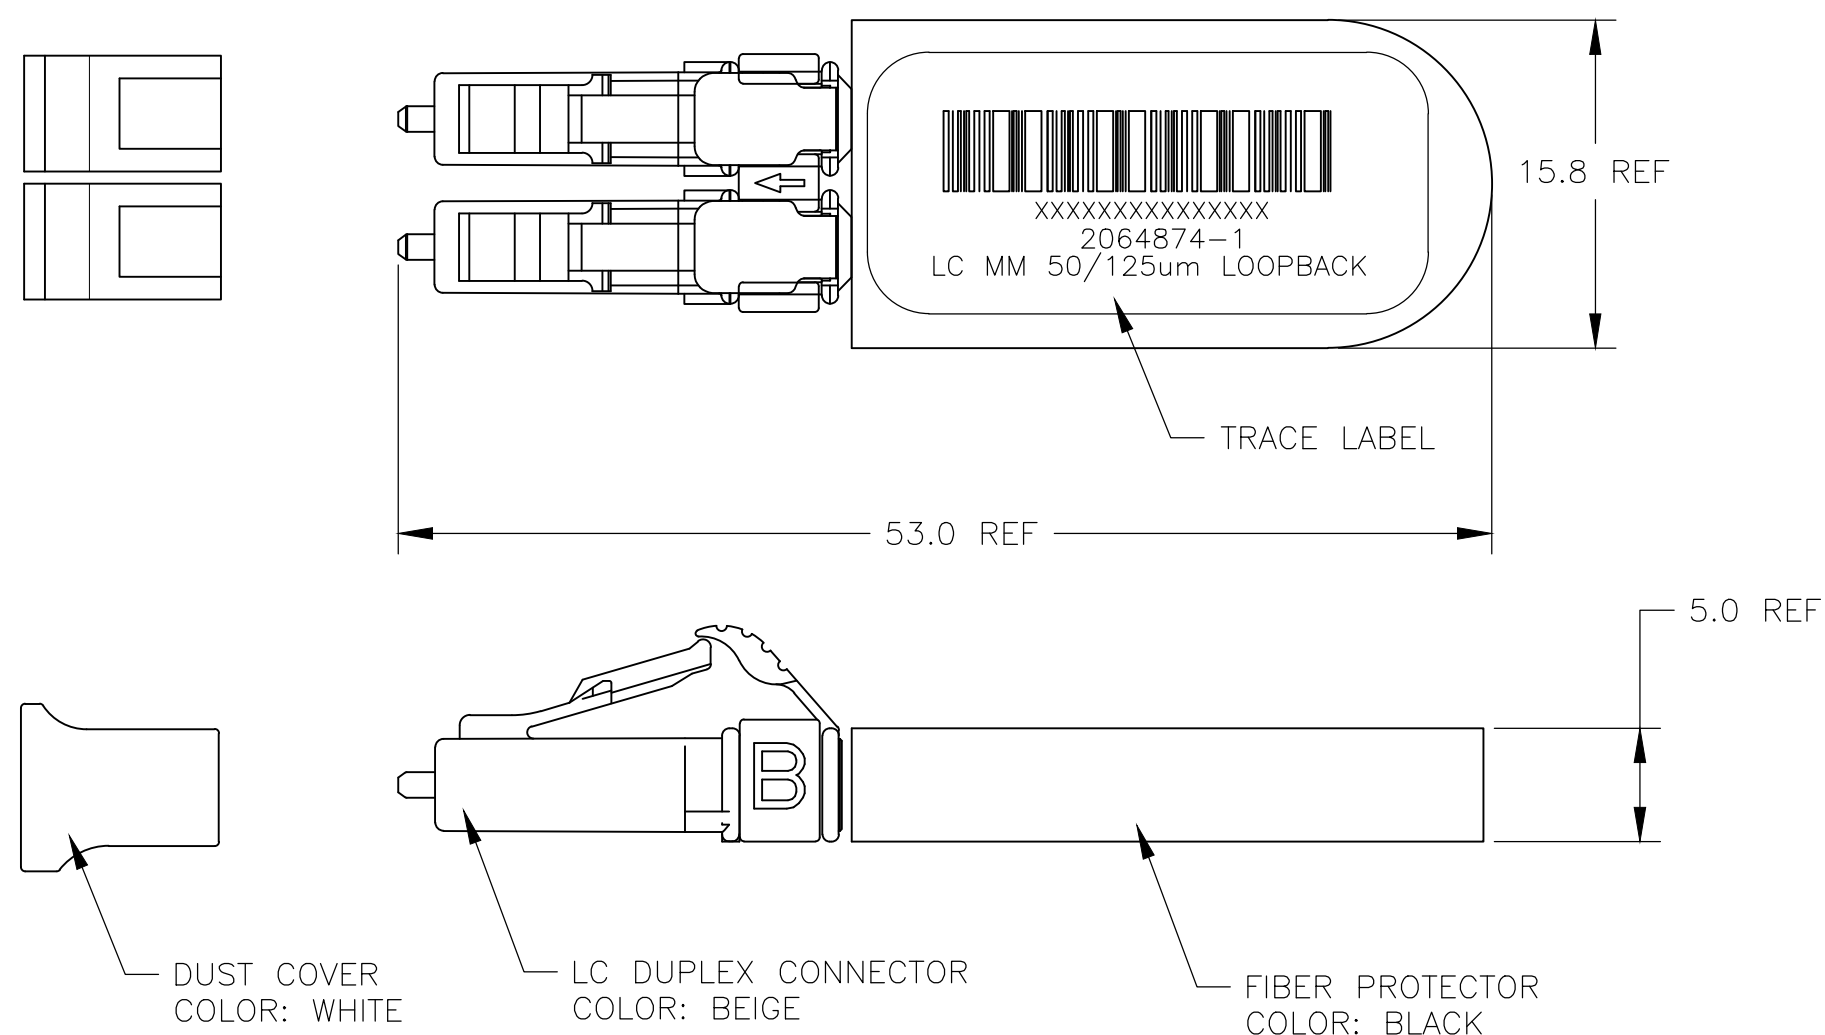




LOC	DIST	REVISIONS					
HG	—	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A	RELEASE PER ECR-15-000195	09JAN15	SW	RZ

NOTES:

1. MAXIMUM INSERTION LOSS IS 0.5 dB AT 850 & 1300nm.
2. MINIMUM RETURN LOSS: 20dB AT 850 & 1300nm
3. INCLUDE IL & RL TEST DATA WITH EACH LOOPBACK
4. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TE STANDARD TEC-138-702.



THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN SIMON WU 160CT12 CHK KIM ZHANG 160CT12 APVD RICHARD ZHAO 160CT12		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		NAME CABLE ASSY, FIBER OPTIC, MM 50/125 LC DUPLEX LOOPBACK -	
		PRODUCT SPEC - APPLICATION SPEC -		SIZE A2	
MATERIAL -		FINISH -		CAGE CODE 00779	
		WEIGHT -		DRAWING NO C=2064874	
		CUSTOMER DRAWING		SCALE NTS	
				SHEET 1 OF 1	
				REV A	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2064874-1](#)