




- | | | | | | | | | |
|---|----------|--|---------------|-------|-------|----|----|------------|
| 7 | OBSELETE | | $\triangle_4$ | 1.584 | 1.500 | 15 | 32 | 1-103739-6 |
| 7 | OBSELETE | | $\triangle_4$ | 1.484 | 1.400 | 14 | 30 | 1-103739-5 |
| | OBSELETE | | | 1.384 | 1.300 | 13 | 28 | 1-103739-4 |
| | OBSELETE | | | 1.284 | 1.200 | 12 | 26 | 1-103739-3 |
| 7 | OBSELETE | | $\triangle_4$ | 1.184 | 1.100 | 11 | 24 | 1-103739-2 |
| | OBSELETE | | | 1.084 | 1.000 | 10 | 22 | 1-103739-1 |
| 7 | OBSELETE | | $\triangle_4$ | .984 | .900 | 9 | 20 | 1-103739-0 |
| | OBSELETE | | | .884 | .800 | 8 | 18 | 103739-9 |
| | OBSELETE | | | .784 | .700 | 7 | 16 | 103739-8 |
| | OBSELETE | | | .684 | .600 | 6 | 14 | 103739-7 |
| | OBSELETE | | | .584 | .500 | 5 | 12 | 103739-6 |
| 7 | OBSELETE | | $\triangle_4$ | .484 | .400 | 4 | 10 | 103739-5 |
| | OBSELETE | | | .384 | .300 | 3 | 8 | 103739-4 |
| | OBSELETE | | | .284 | .200 | 2 | 6 | 103739-3 |
| 7 | OBSELETE | | $\triangle_4$ | .184 | .100 | 1 | 4 | 103739-2 |
| | OBSELETE | | | .084 | | | 2 | 103739-1 |

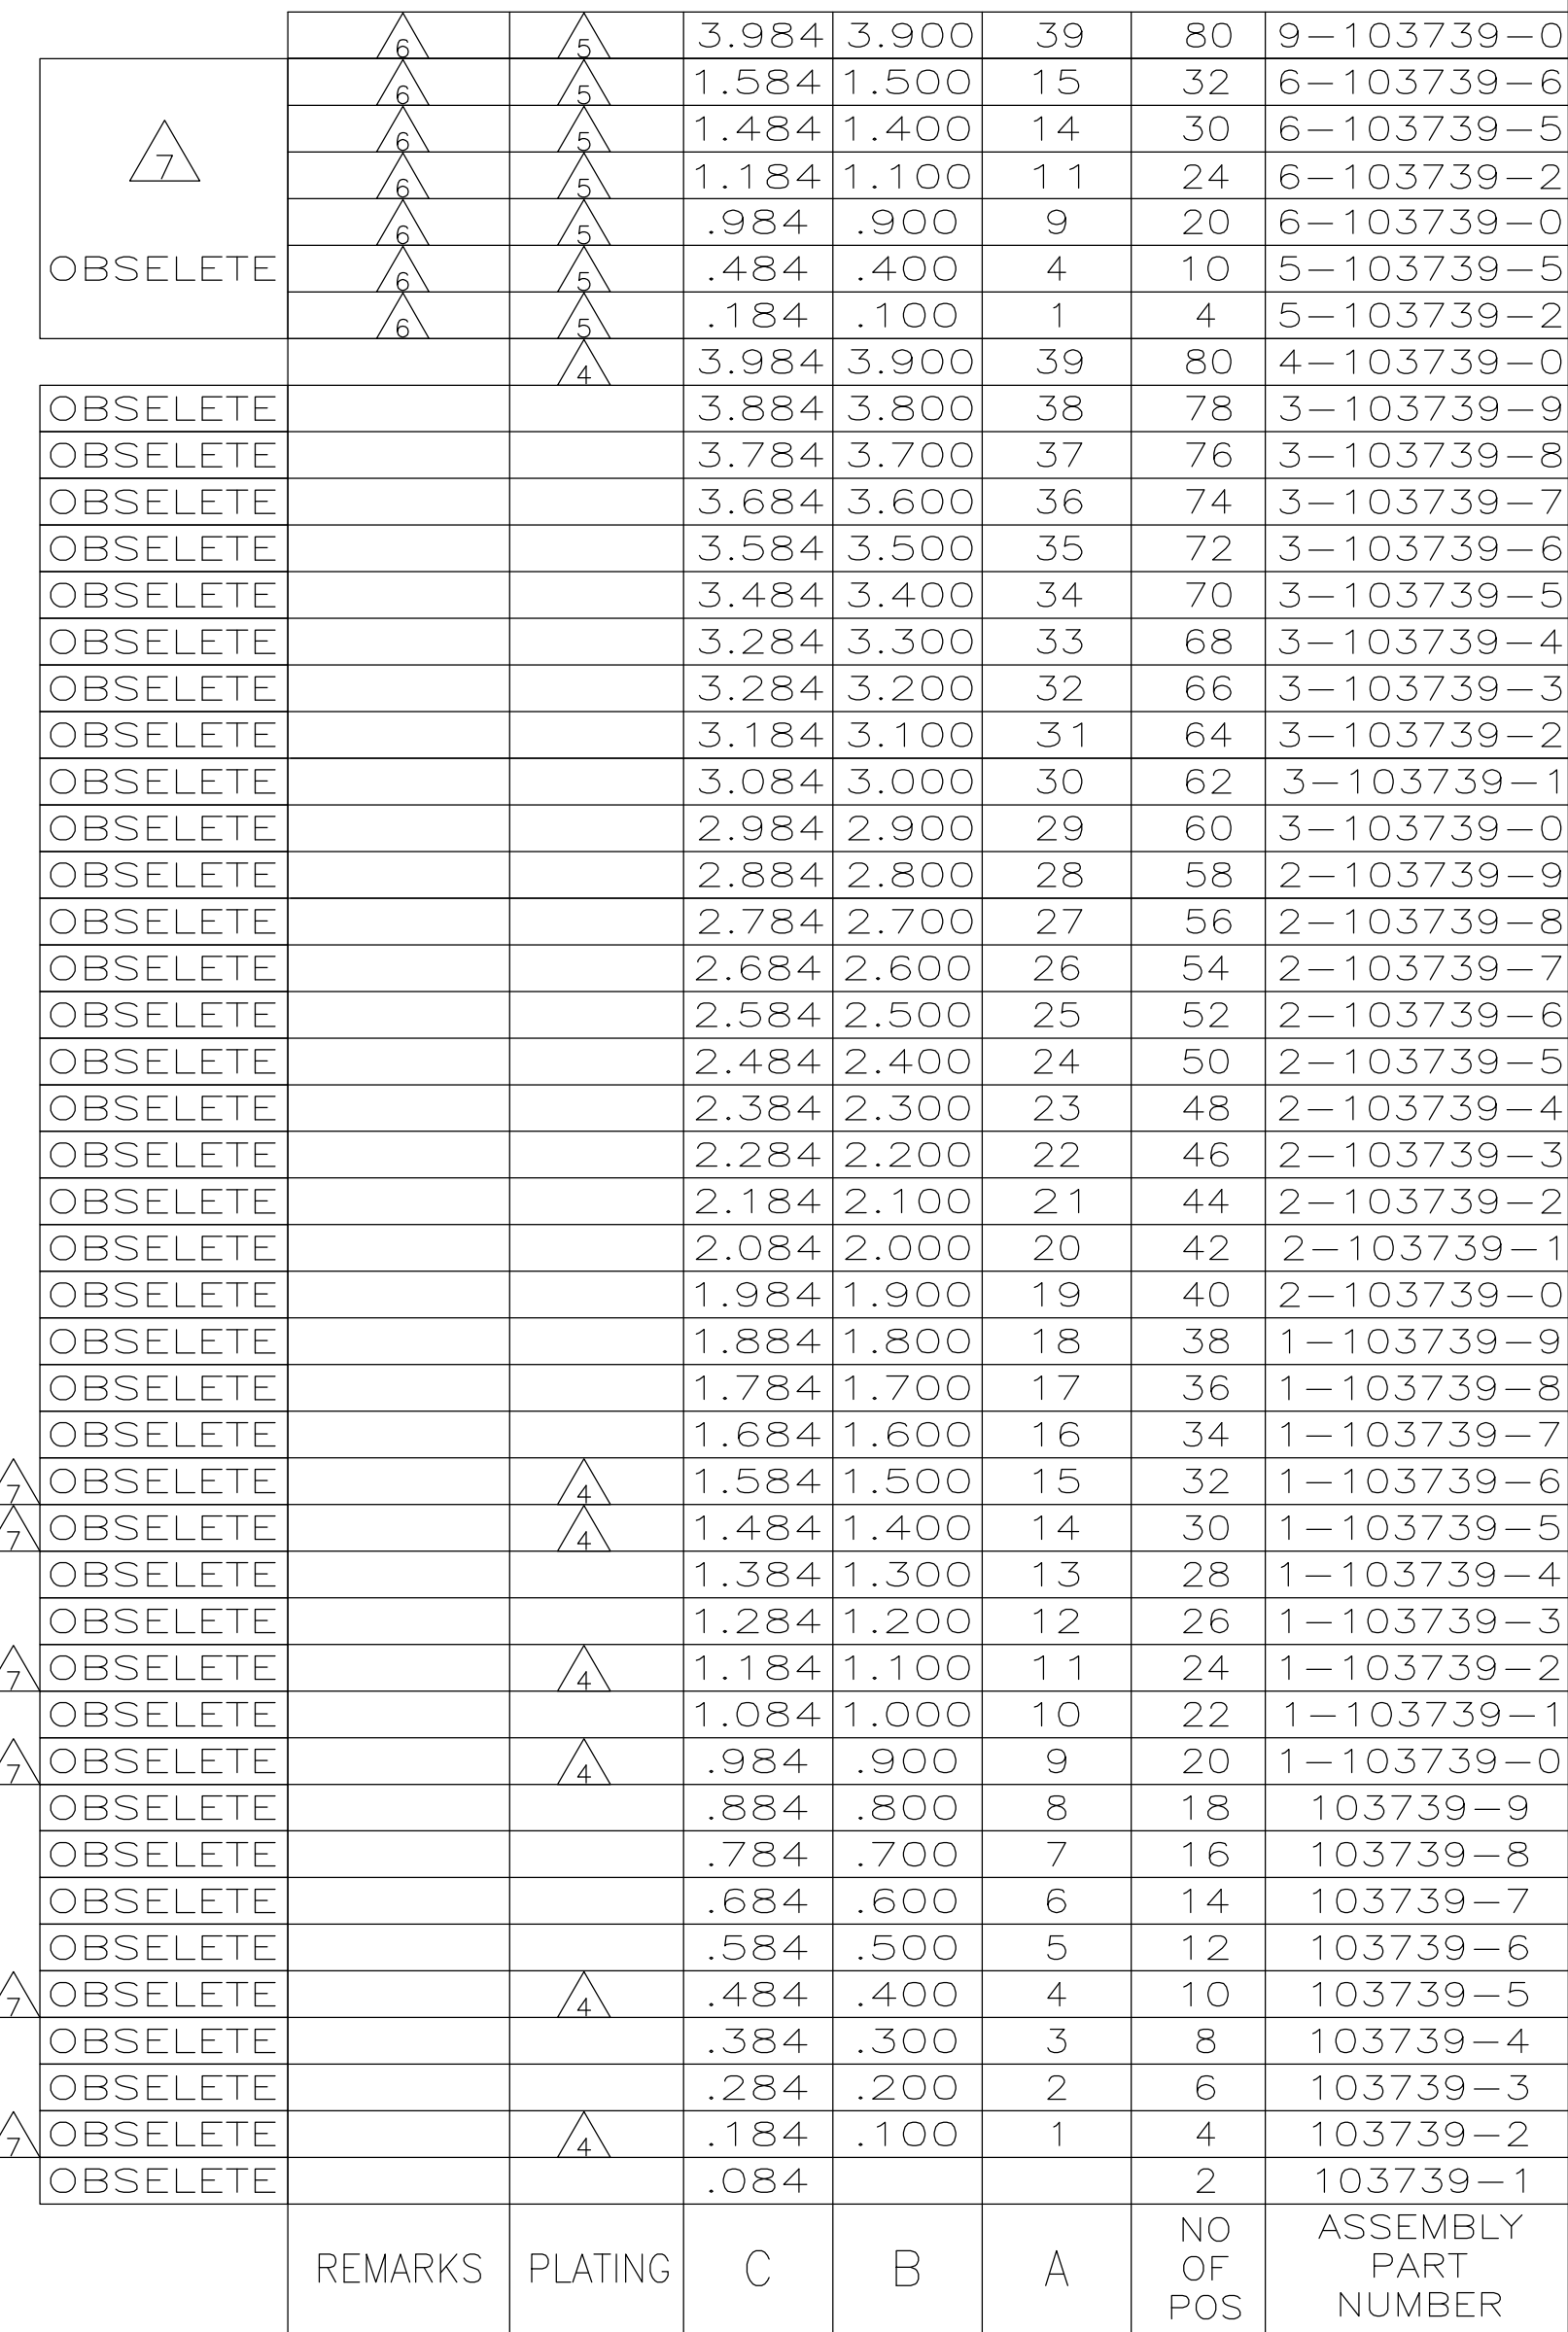

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L D RINGLEY 25-07-85		 TE Connectivity			
		CHK R ELICKER 26-07-85					
DIMENSIONS:		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		NAME ASSEMBLY, MOD II, HEADER, BREAKAWAY, DOUBLE ROW, .100X, 100 C/L, WITH .025 SQUARE POSTS			
INCHES		APVD R ELICKER 26-07-85					
		PRODUCT SPEC					
		—					
		APPLICATION SPEC					
		—					
0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± .005 4 PLC ± — 4 ANGLES ± ± —		SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO	
MATERIAL HOUSING: FLAME RETARDANT THERMOPLASTIC COLOR: BLACK CONTACT: COPPER ALLOY		FINISH		WEIGHT — A2 00779 C-103739		—	
SEE TABLE		CUSTOMER DRAWING		SCALE	4:1	SHEET 1 of 1	REV

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[9-103739-0](#)