




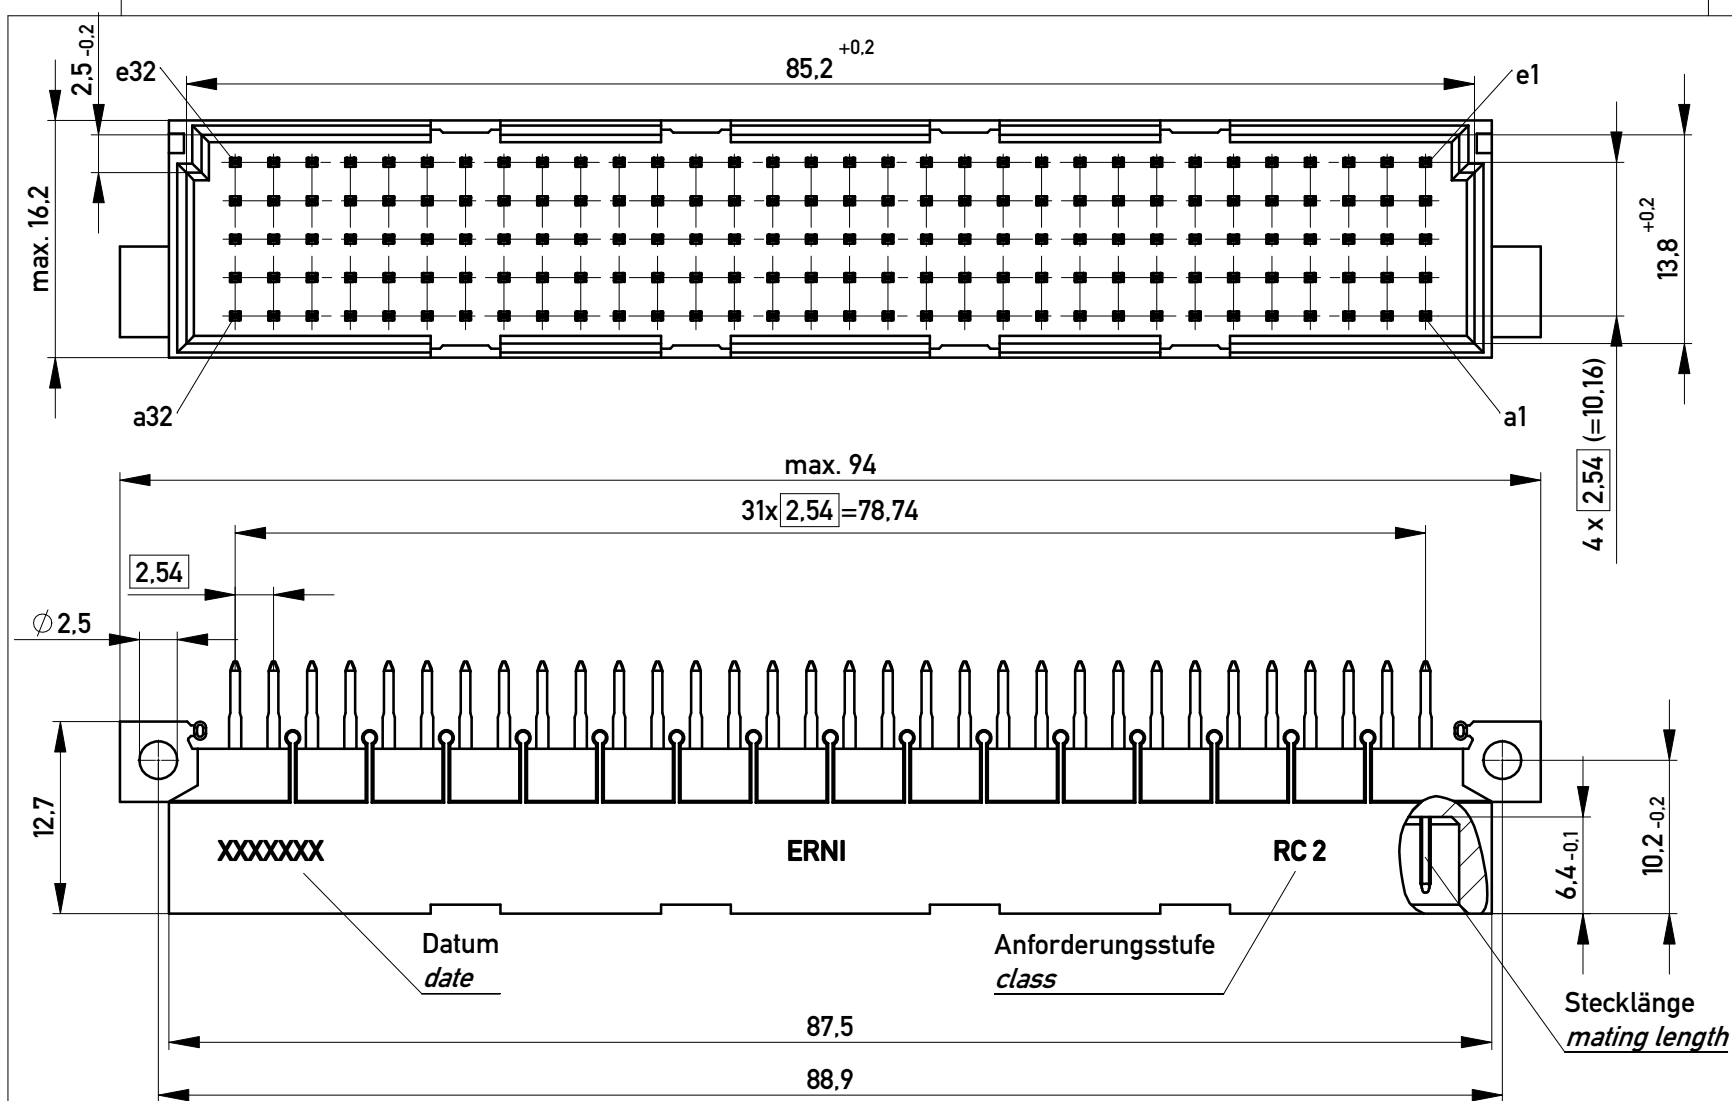


Bestückungsplan / contact layout

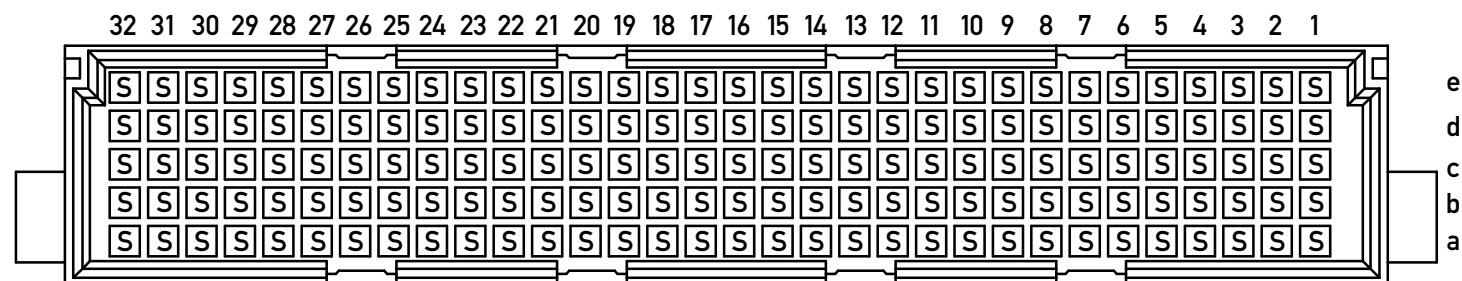

Leiterplatten-Lochbild / PCB drillhole pattern

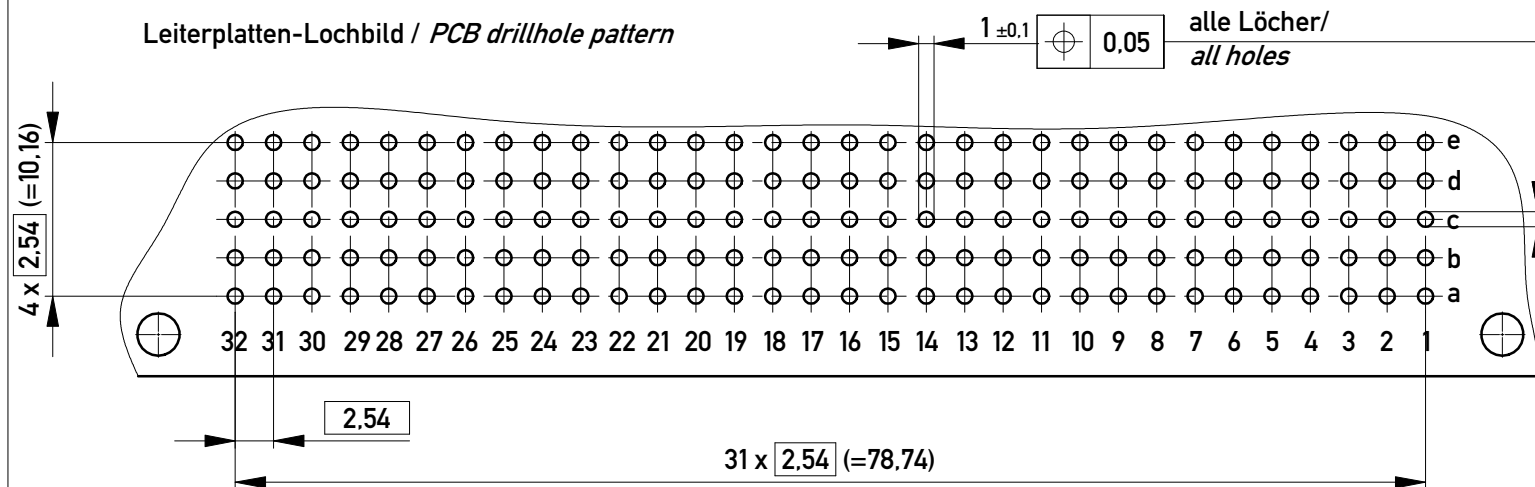



Stecklänge / mating length



E = early mate, late break / voreilend

S = standard

L = late mate, early break / nacheilend

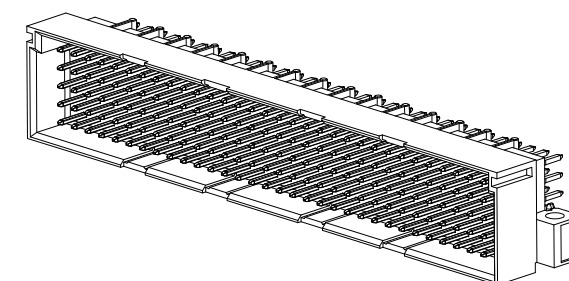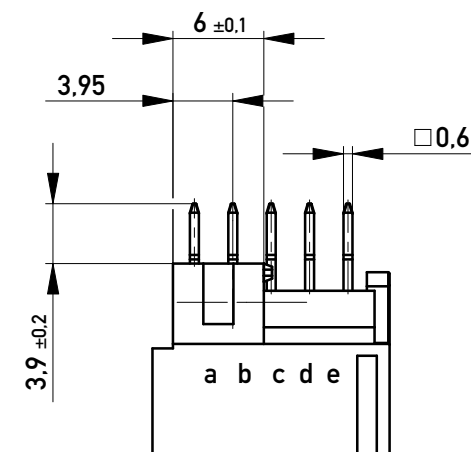

Gerader Lötanschluss 0,6x0,6mm / straight solder terminal 0,6x0,6mm

Bauart 4 / type 4


Anforderungsstufe 2 = 400 Steckzyklen / performance class 2 = 400 mating cycles

Fehlende Maße und Angaben nach IEC 60 603-2 / DIN EN 60 603-2

Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16016 to be observed.

Proprietary notice pursuant to ISO 14001 to be observed.

Information:				Tolerances		 All Dimensions in mm		Scale		2:1			
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.				Subject to modification without prior notice. Drawing will not be updated.				Designation Messerleiste E160 Löt <i>Male Conn. E160 solder</i>					
				d		02.05.2017				www.ERNI.com		384294	
Index		Date		A3									
								Class		STVE			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[384294](#)